# OUTDOOR LIGHTING

Lighting Product Catalog



# PRODUCTS CONTENT

## Landscape Light



P2 PROGRESS


P4 SQUIRCLE


P6 ELLIPSES


## Pathway Light



P8 ROMANCE


P10 SQUARE


P12 GOLDEN MUSHROOM


P14 GOLF


P16 GOLDEN TRIANGLE


P18 GOLD TYCOON-A


P20 NEW SPACE


P22 MOON STAR


P24 FAIRY


P26 FLOURISH


P28 CATHERINE


P30 JUNON


P32 SUN


P34 VALIANT


P36 UFO


P38 SONUG


P40 DROP


P42 CLASSIC CROWN


P44 CROWN


P46 LANTERN


P48 WATER


P50 GLISTEN


P52 STARRY SKY


P54 YT-OX-A


P55 YT-OX-E


P56 CHARLES


P58 GRACE


P60 DEFENDER


## Solar Pathway Light



P62 JAZZ-A


P64 JAZZ-B/C


P66 FULEE


P68 AURORA


P70 GAVIN


P72 YT-007


P74 SUN-SOLAR


P76 WISE


P78 STAR

## Photovoltaic Pathway Light


P80
JAZZ-A


P81
ROMANCE


P82
KALE


P82
GOLF

## Pathway Light P83


YT-2231


YT-2237


YT-2216


YT-2242


YT-2225


YT-2222


YT-2206


YT-2210


YT-2212

## Pathway Light / Garden Lamp


P84
PHAETON-A/B


P86
JANE


P88
TENGDA-A/B


P90
PROSPECT


P92
YT-008


P94
ANGELA


P96
ADELA


P98
AMINA


P99
PEDESTRIAN STREET

## Solar Street Light


P100
SPARKLE


P101
ETERNITY


P102
LUCKY


P103
STARJOY


P104
LOUISE


P105
KYLIE

## Utility Street Light


P106
BLAZER


P108
NIKON


P110
ADVENTURE


P112
LEXUS


P113
SHINELAND


P114
ARNIE-B


P115
ARNIE-A


P116
KISRO


P117
DAWN


P118
DLONG


P119
SHINE

## Floodlight


P120

CAESAR-A


P121

CAESAR-B


P122

CAESAR-C


P123

HERO


P124

APPLE


P125

EXQUISITE

## LED Light Bulb


P126

LEITER

## Solar Lawn Light


P128

JAZZ-A


P129

CALLY


P130

ABBY


P131

BECCA


P132

CALI


P133

ABEILLE


P134

GOLD TYCOON-A

## Lawn Light


P135

SQUIRCLE-A


P136

SQUIRCLE-B


P137

ROUND-A


P138

GOLD TYCOON-B


P139

GOLD TYCOON-A


P140

GOLDEN TRIANGLE


P141

FLOURISH


P142

FLORID


P143

ELLIPSES


P144

GOLDEN MUSHROOM


P145

FAIRY


P146

SQUIRCLE-C


P147

ROUND-B


P148

BLOCK



P149

CAMEAL

## Smart Chair


P150

BOYA-A

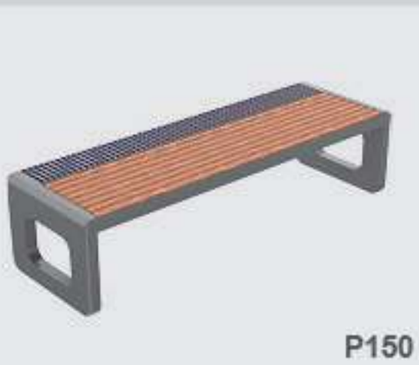
P150

BOYA-B


P151

YAGE-B


P151

YAGE-A

# PROGRESS



## Product Details







## Product Parameters

| PRODUCT NAME | PROGRESS |
|---|---|
| Product Size (mm) | φ180 X H3500 |
| Power | 30W / 60W / 90W |
| Efficiency | 120-150lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC / PMMA |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Light Distribution Curve

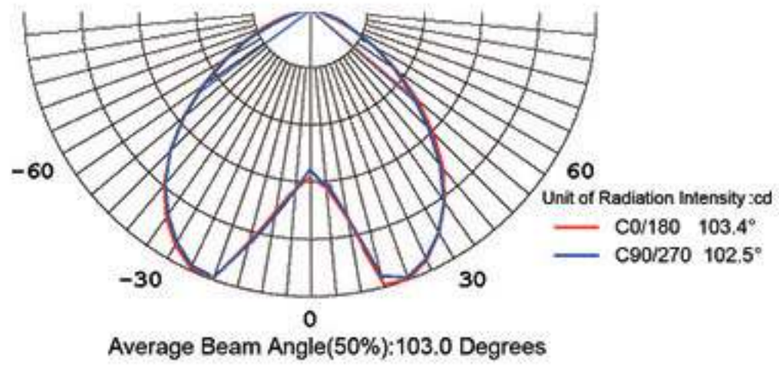


## Product Size

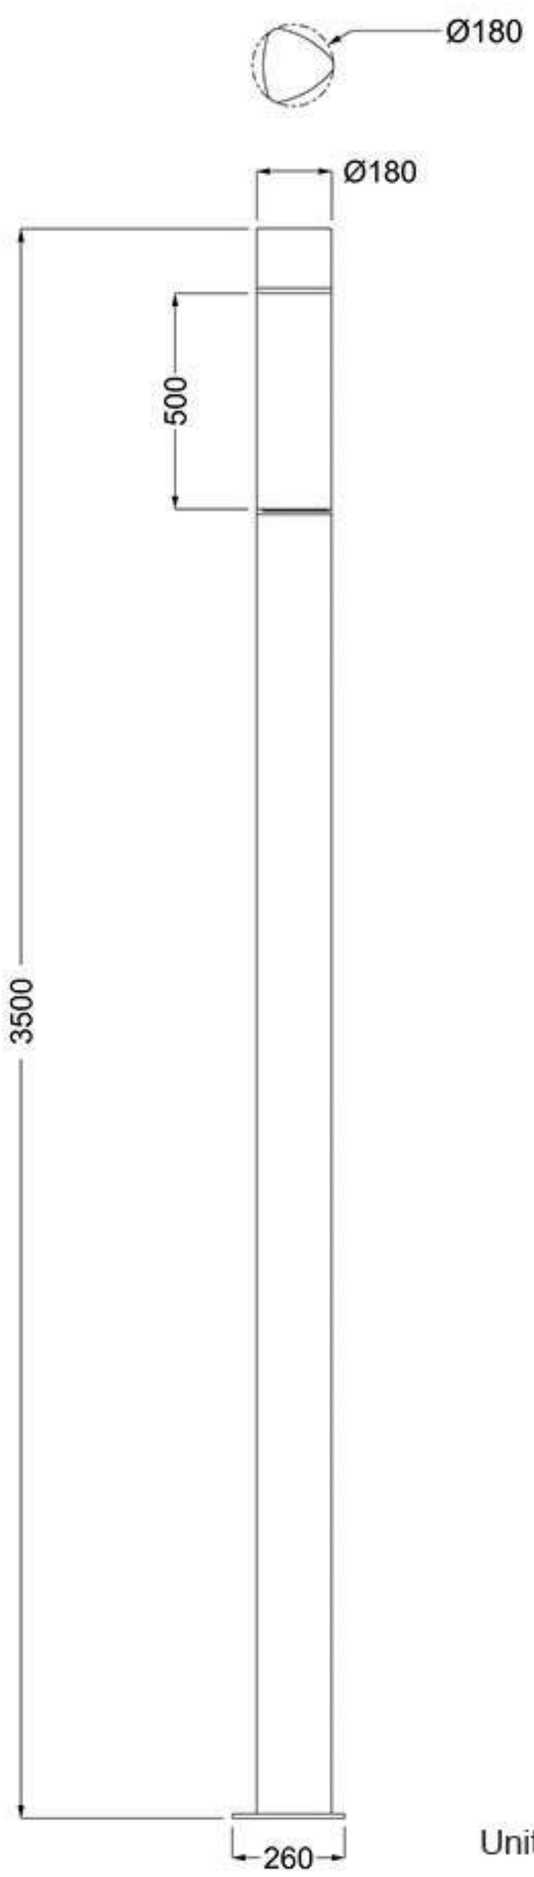


Unit:mm

## Product Rendering



# SQUIRCLE



## Product Details







## Product Parameters

| PRODUCT NAME | SQUIRCLE |
|---|---|
| Product Size (mm) | 220 X 220 X 3500<br>220 X 220 X 5000<br>180 X 180 X 3500<br>135 X 135 X 3000 |
| Power | 30W / 60W |
| Efficiency | 120-160lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | 24 ± 0.5kgs （3.5m) |

## Light Distribution Curve

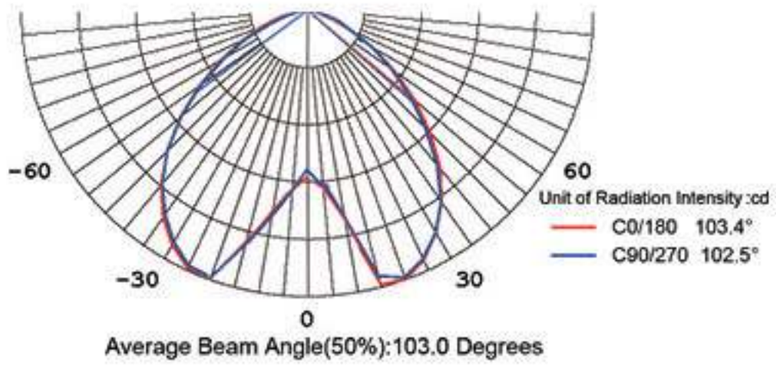


## Product Size

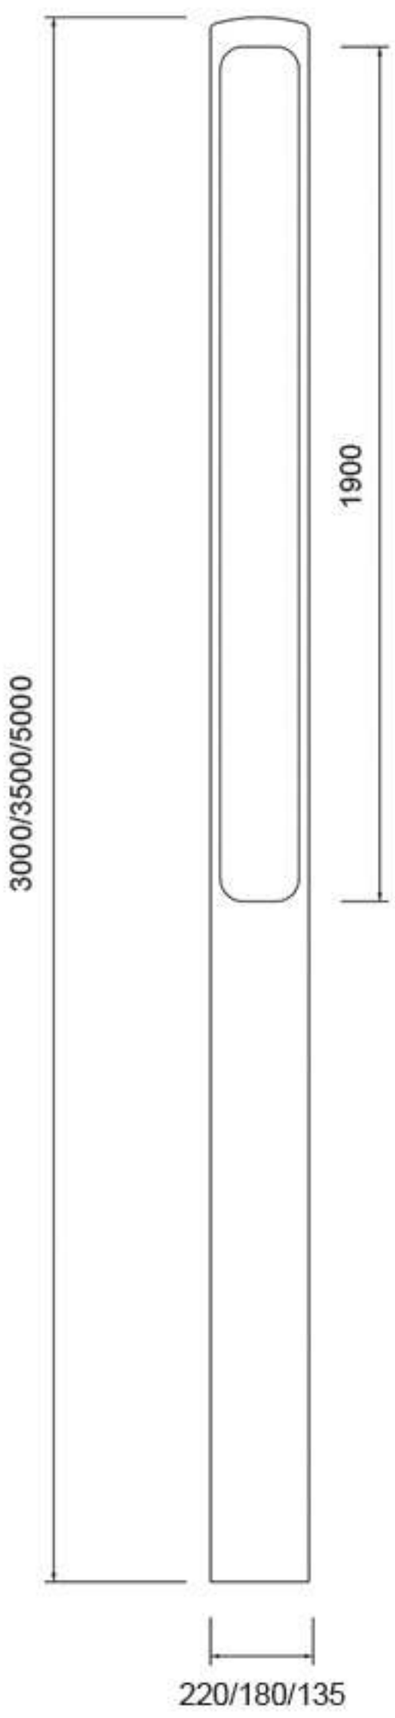


Unit:mm

## Product Rendering



# ELLIPSES



## Product Details







## Product Parameters

| PRODUCT NAME | ELLIPSES |
|---|---|
| Product Size (mm) | 220 X 120 X 3500 |
| Power | 30W / 60W |
| Efficiency | 120-160lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Module |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | 12 ± 0.5kgs(3.2m) |

## Light Distribution Curve

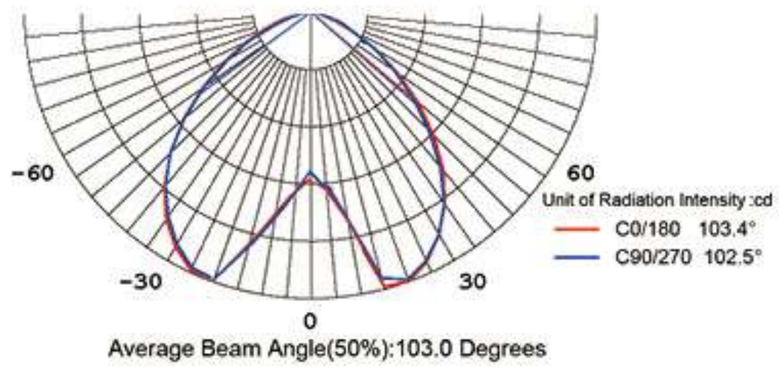


## Product Size

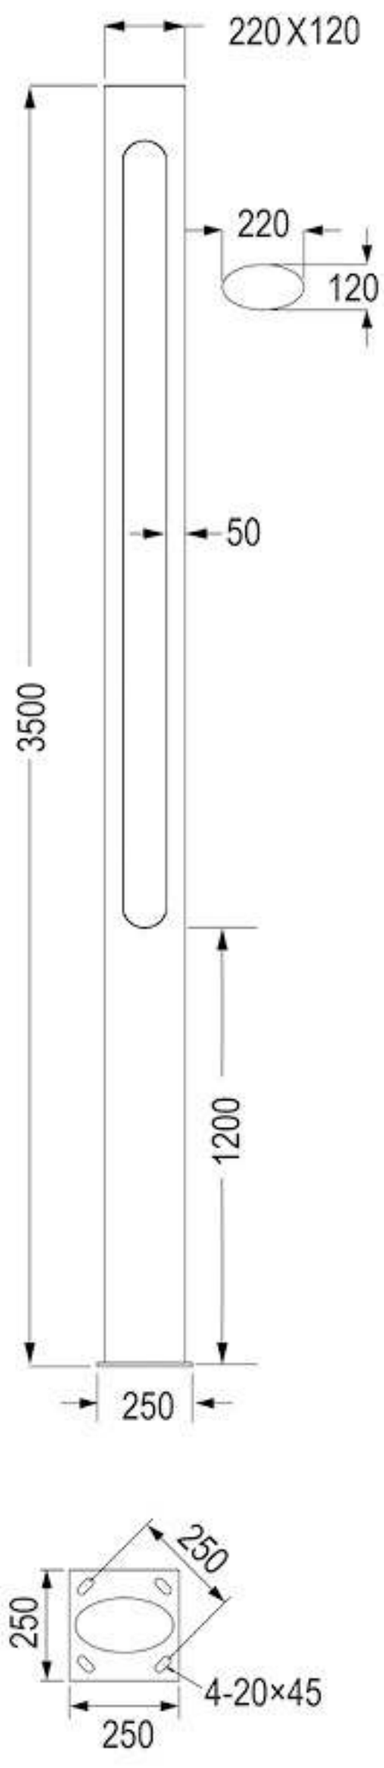


Unit:mm

## Product Rendering



# ROMANCE



## Product Details






## Product Parameters


| PRODUCT NAME | ROMANCE |
|---|---|
| Product Size (mm) | φ500 X H600 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5-5m |
| Warranty | 5 Years |
| Net Weight | 6.5 ± 0.5kgs |

## Light Distribution Curve

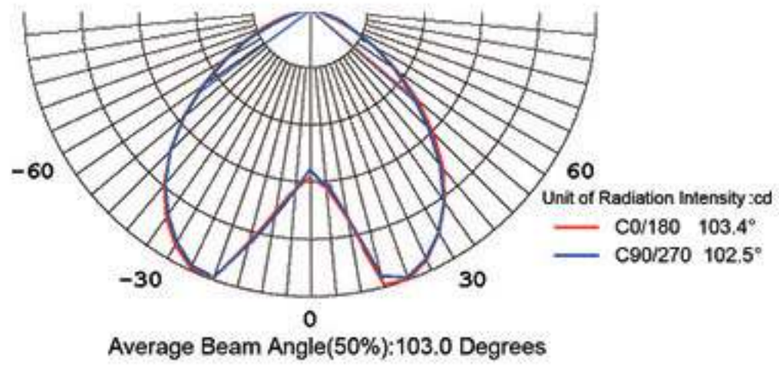


Average Beam Angle(50%):103.0 Degrees

## Product Size

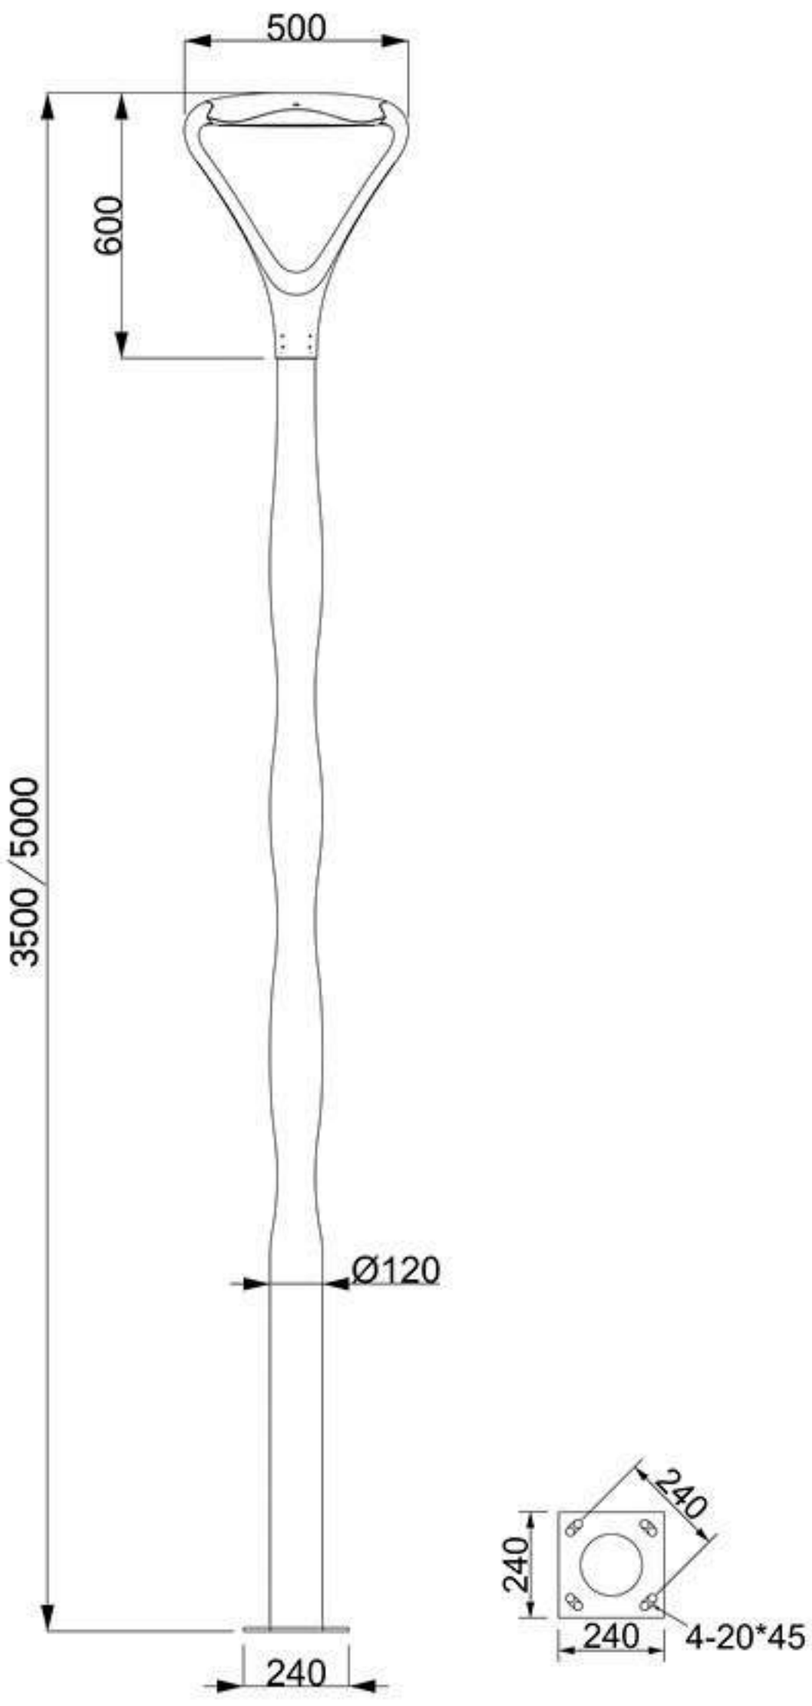





Unit:mm

## Product Rendering



# SQUARE



## Product Details







## Product Parameters

| PRODUCT NAME | SQUARE |
|---|---|
| Product Size (mm) | 400 X 400 X 550 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5-5m |
| Warranty | 5 Years |
| Net Weight | 6 ± 0.5kgs |

## Light Distribution Curve

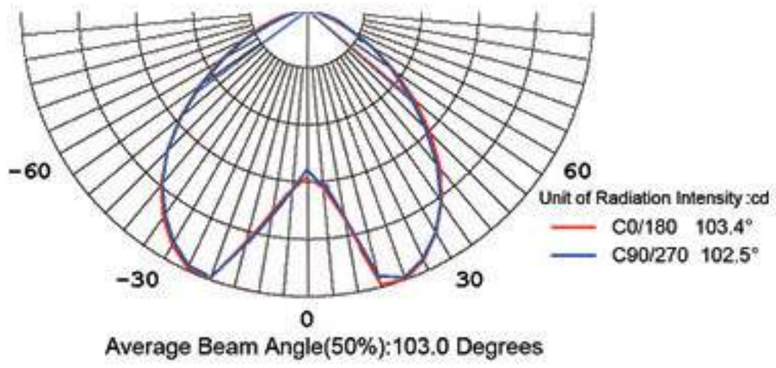


## Product Size

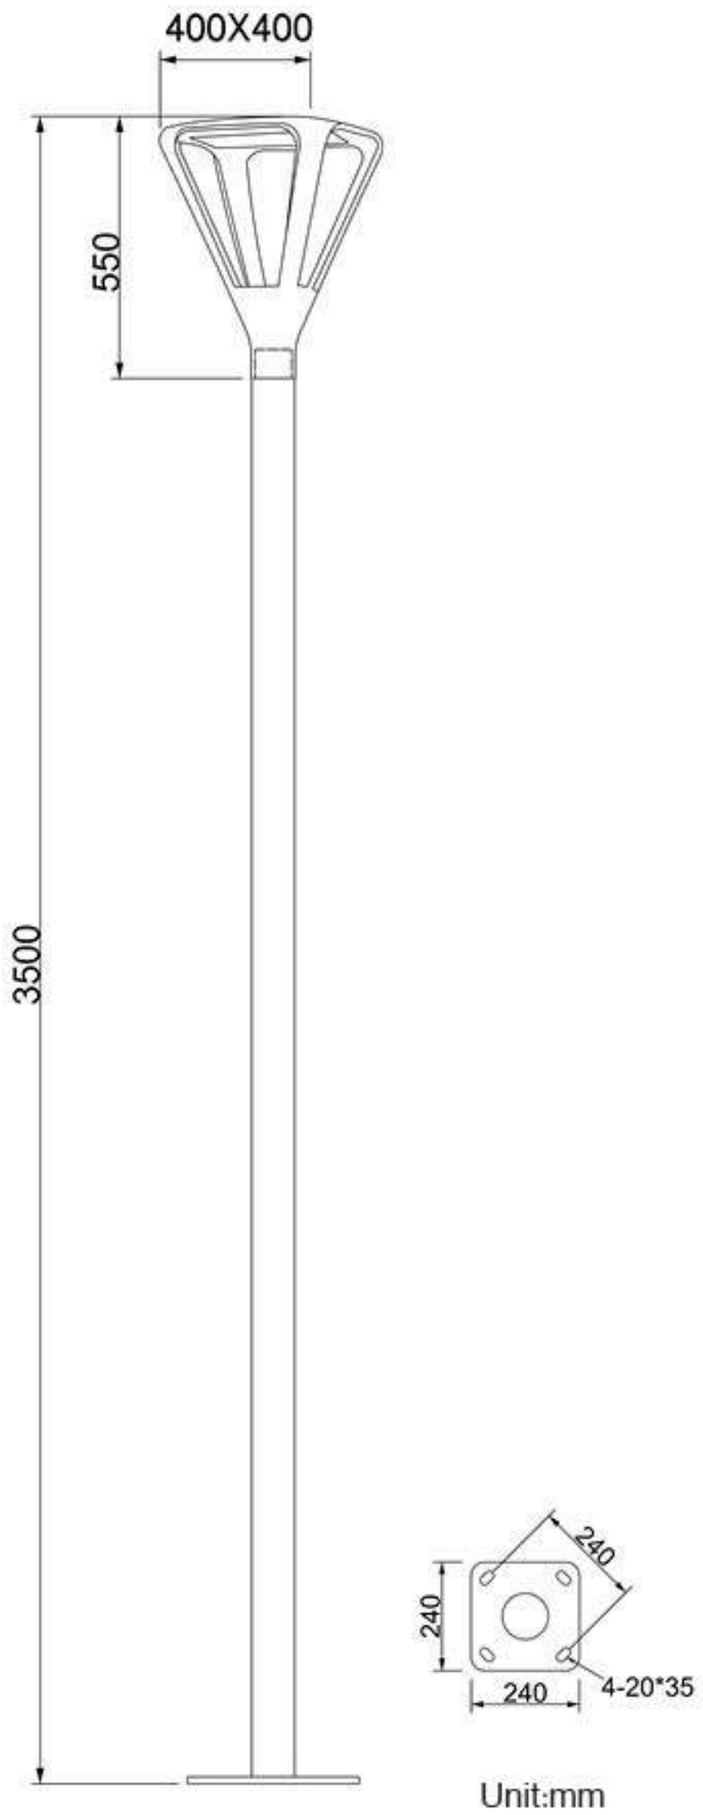


## Product Rendering



# GOLDEN MUSHROOM



## Product Details







## Product Parameters

| PRODUCT NAME | GOLDEN MUSHROOM |
|---|---|
| Product Size (mm) | φ500 X H100 |
| Power | 30W / 50W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PMMA |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 4 ± 0.5kgs |

## Light Distribution Curve

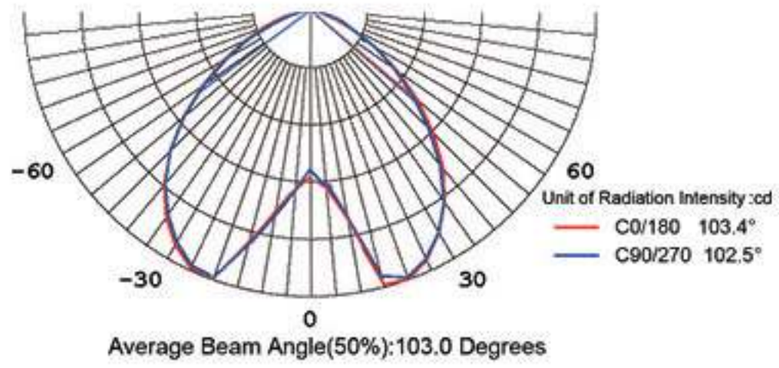


## Product Size

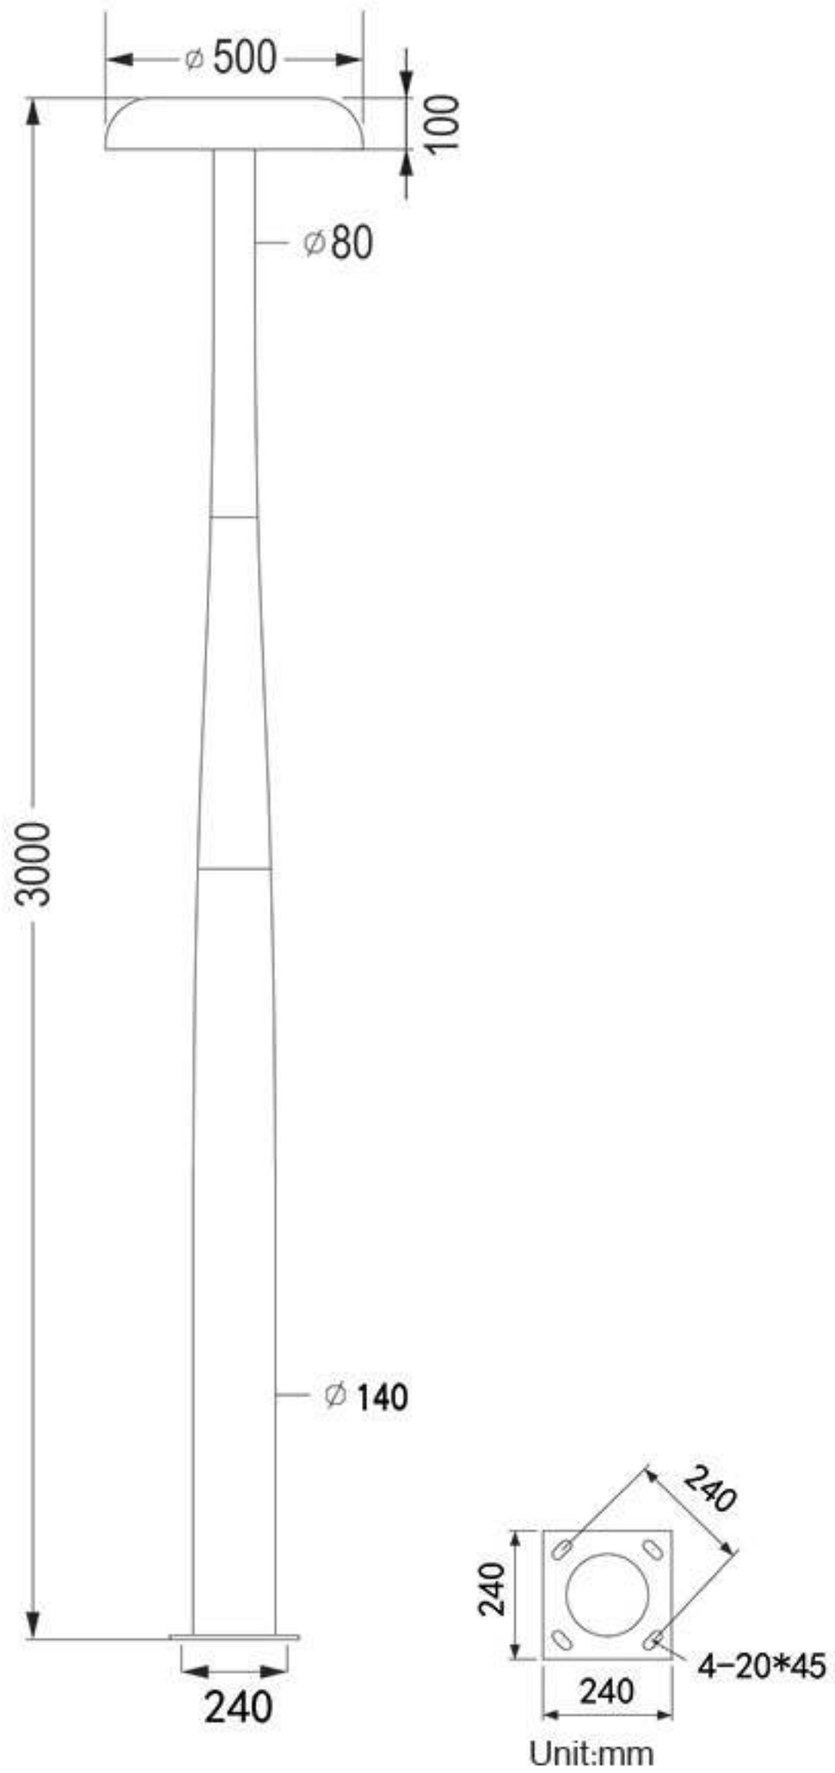


## Product Rendering



# GOLF



**Product Parameters**


| PRODUCT NAME | GOLF |
|---|---|
| Product Size (mm) | 635 X 400 X 500 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC / PMMA |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-6m |
| Warranty | 5 Years |
| Net Weight | 5.5 ± 0.5kgs |

## Product Details





## Product Size

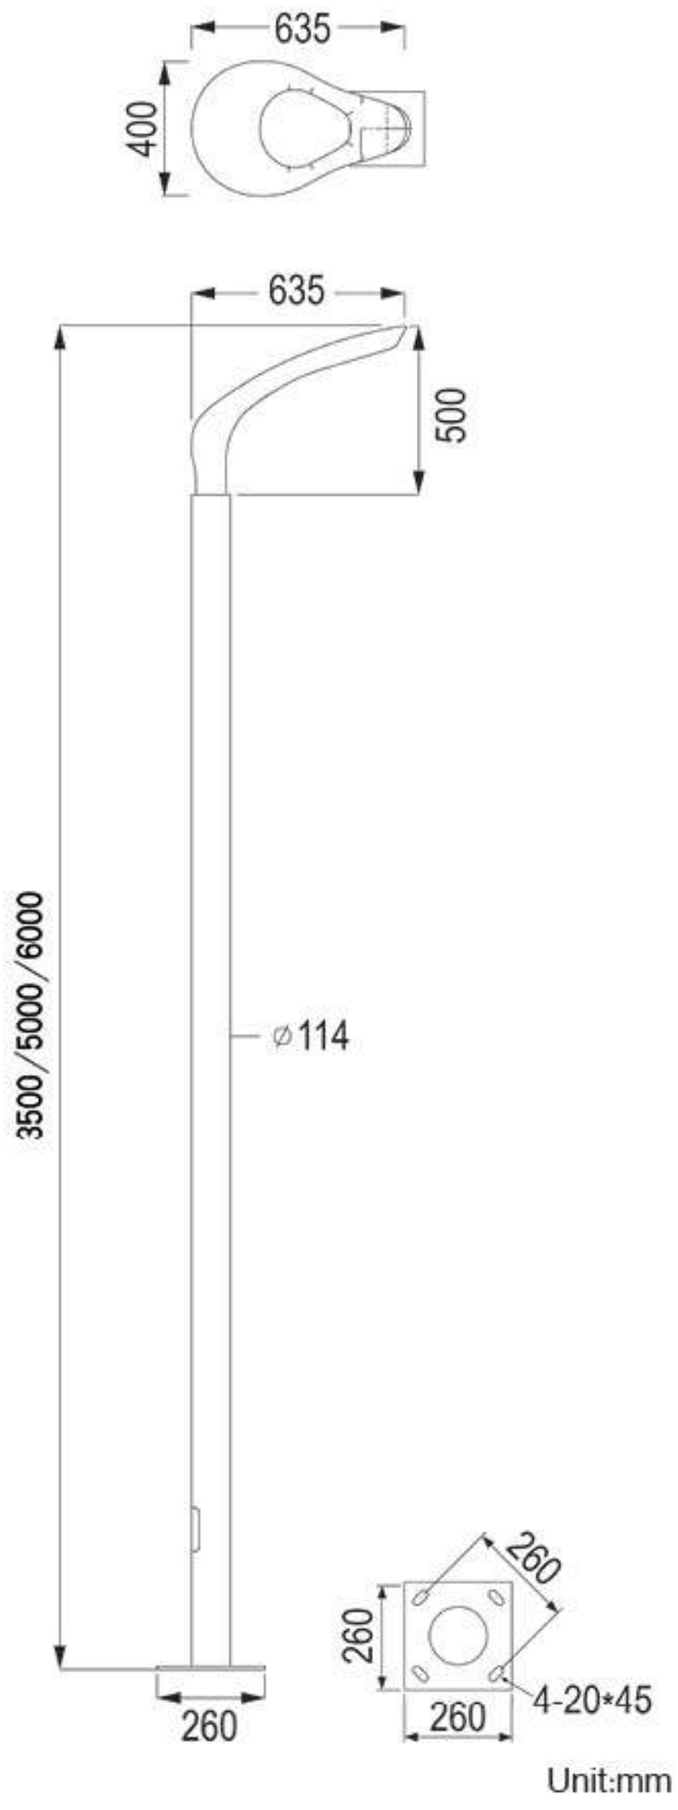


Unit:mm

## Product Rendering



# GOLDEN TRIANGLE



## Product Details







## Product Parameters

| PRODUCT NAME | GOLDEN TRIANGLE |
|---|---|
| Product Size (mm) | φ480 X H530 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3-6m |
| Warranty | 5 Years |
| Net Weight | 6.8 ± 0.5kgs |


## Light Distribution Curve

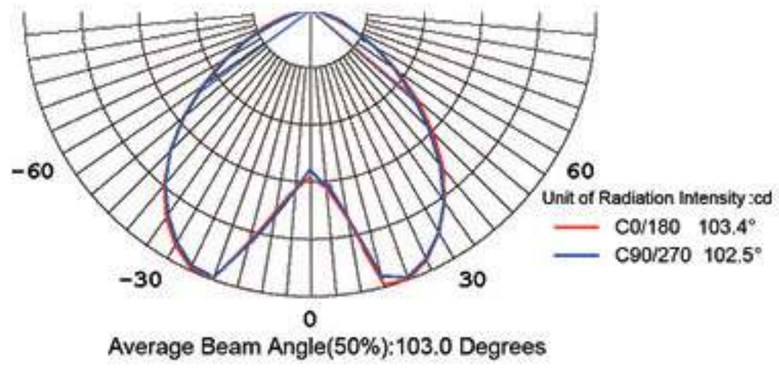


## Product Size

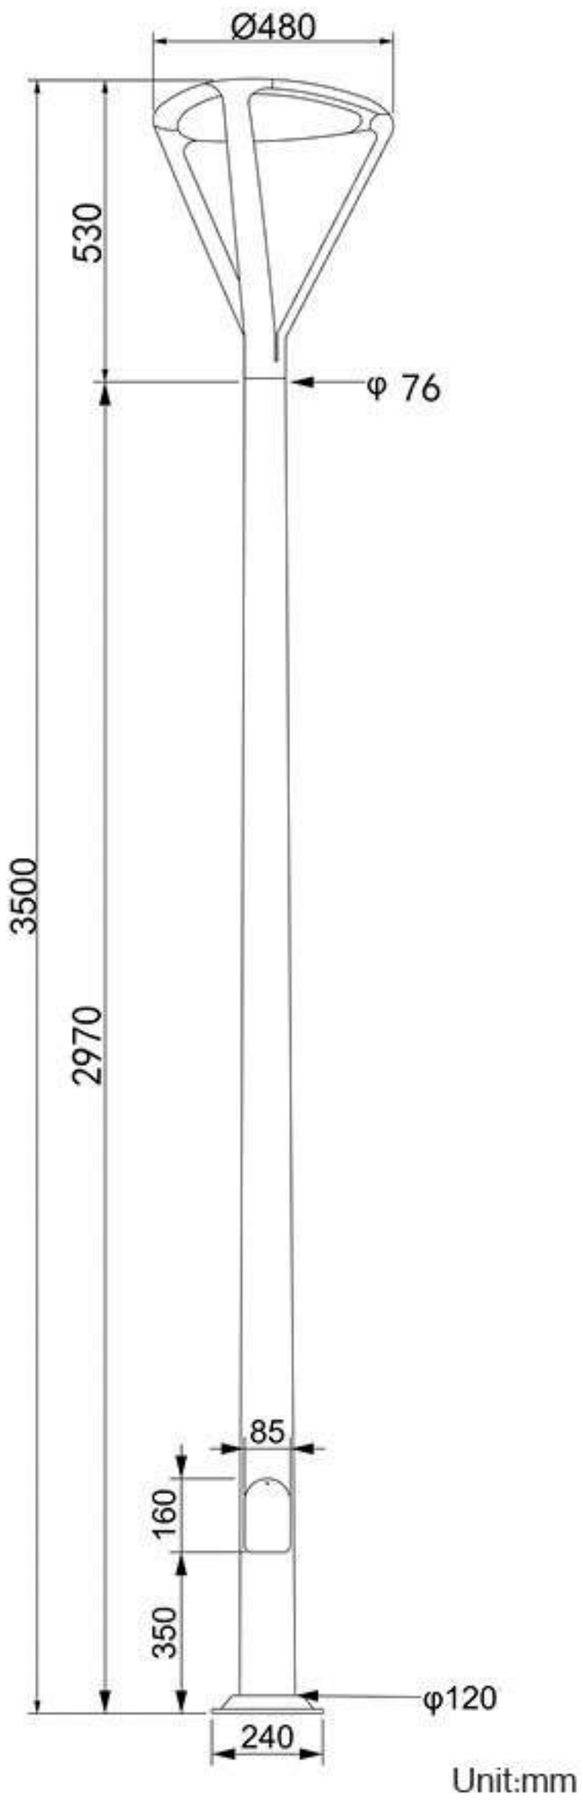


## Product Rendering

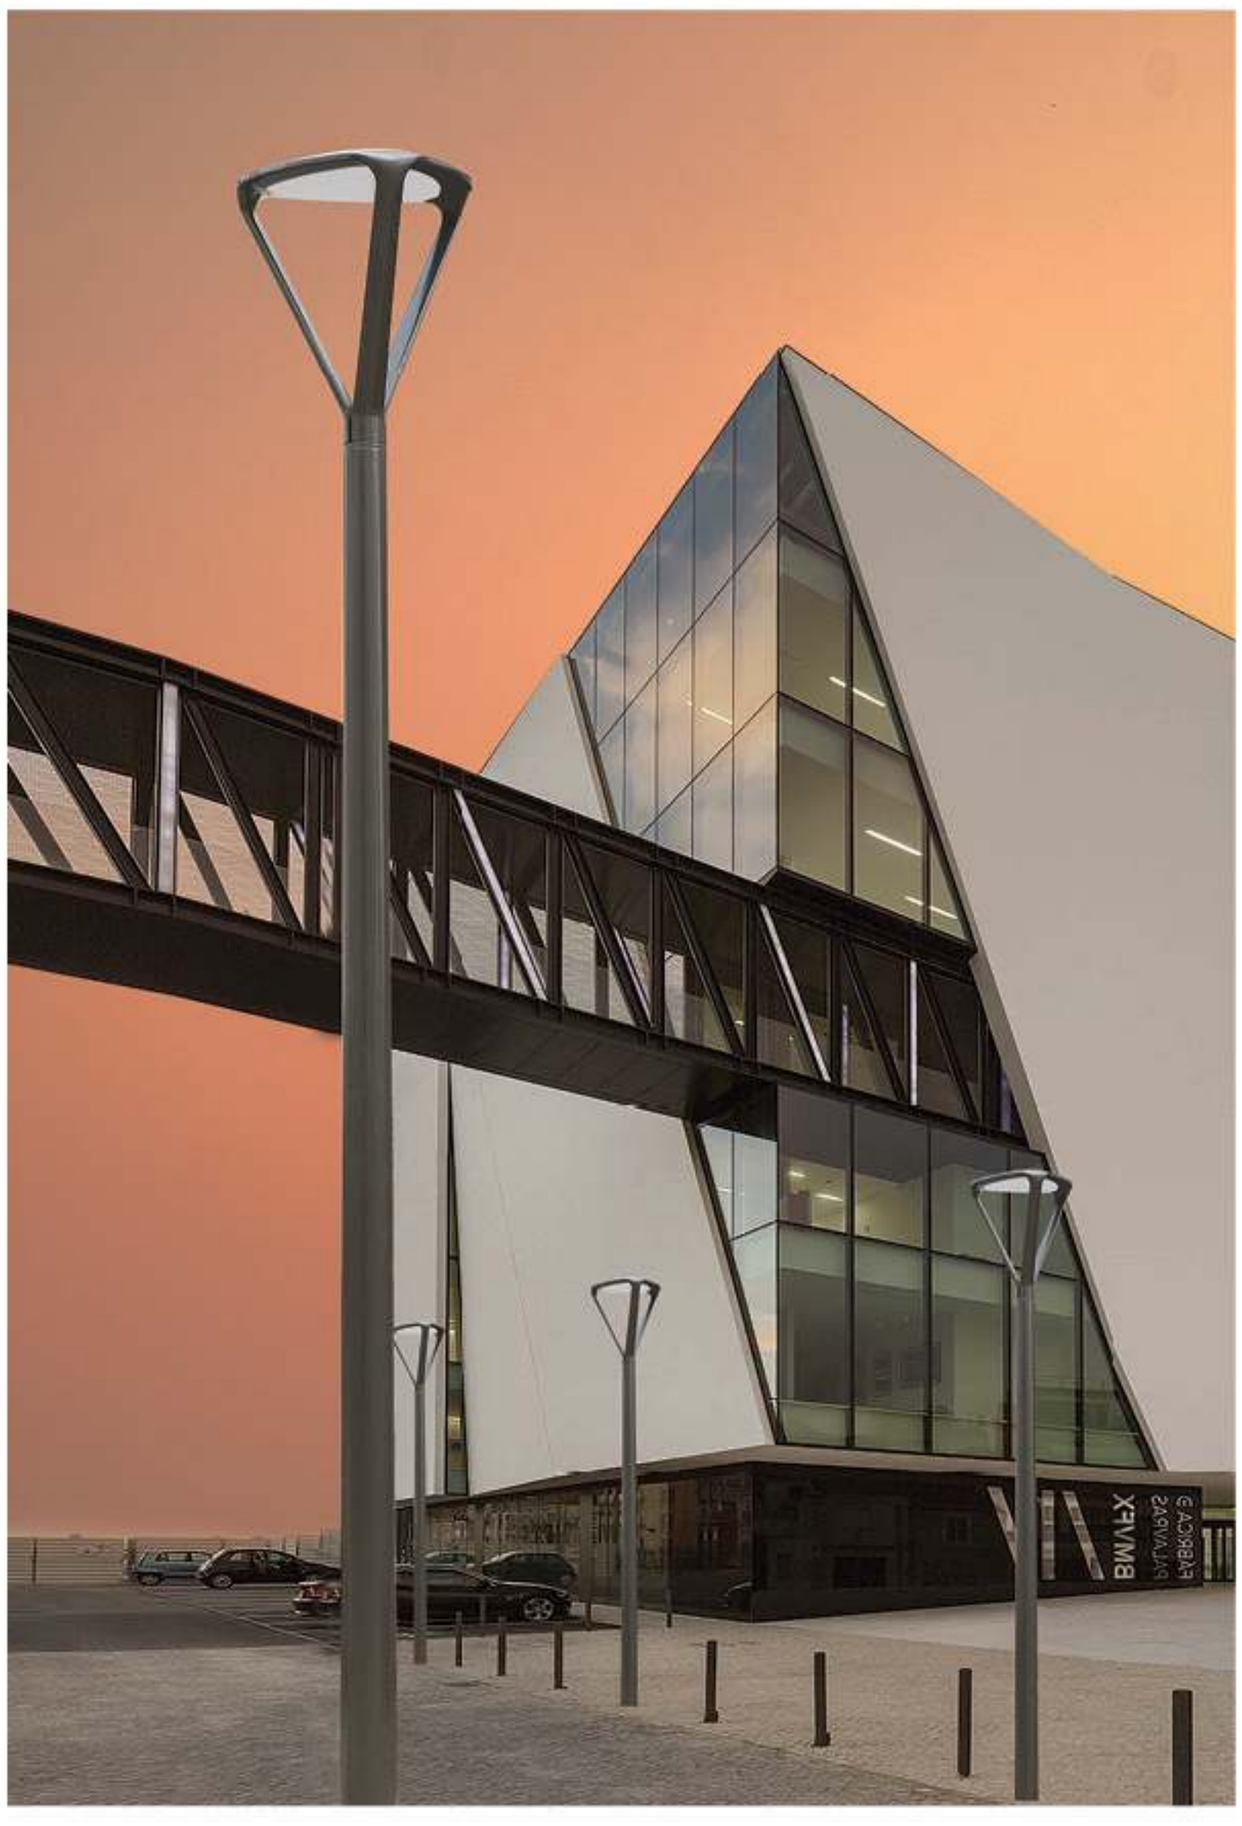

# GOLD TYCOON–A



## Product Details









## Product Parameters

| PRODUCT NAME | GOLD TYCOON-A |
|---|---|
| Product Size (mm) | 320 X 320 X 700 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + 201/304 Stainless Steel |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 89mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 5.6 ± 0.5kgs |

## Light Distribution Curve

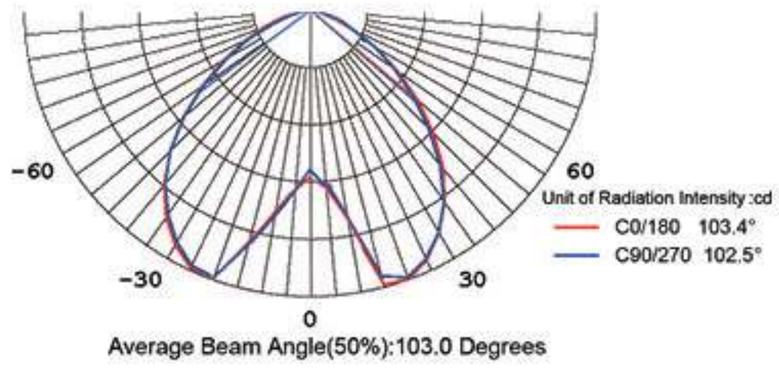


## Product Size

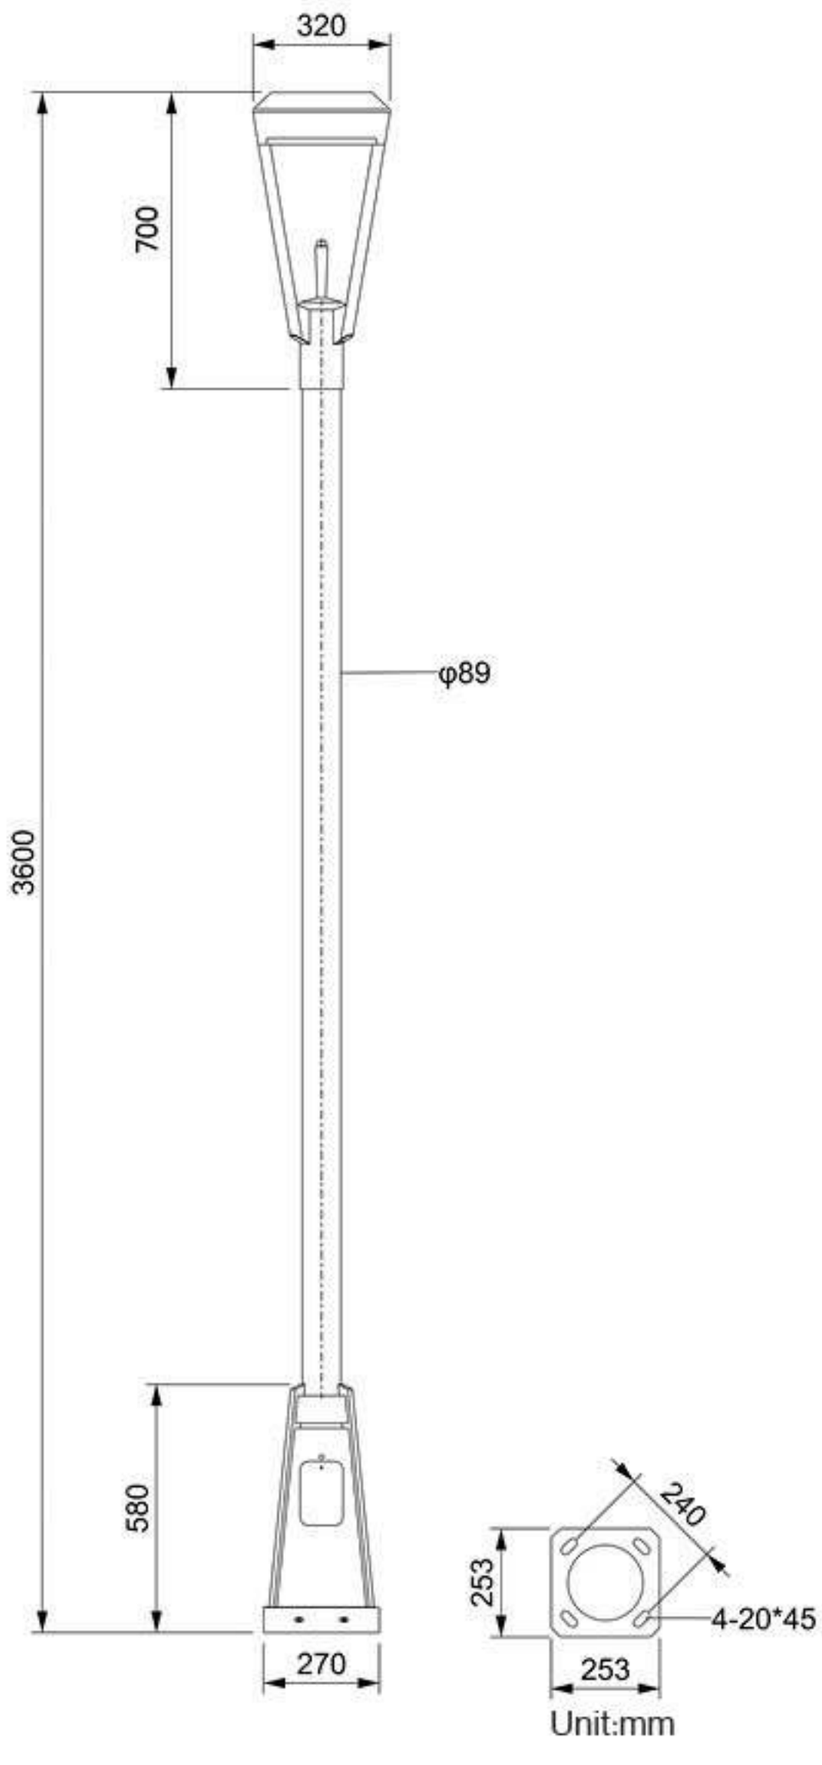


## Product Rendering



# NEW SPACE



## Product Details







## Product Parameters

| PRODUCT NAME | NEW SPACE |
|---|---|
| Product Size (mm) | 500 X 170 X 750 |
| Power | 30W / 60W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 4 ± 0.5kgs |

## Light Distribution Curve

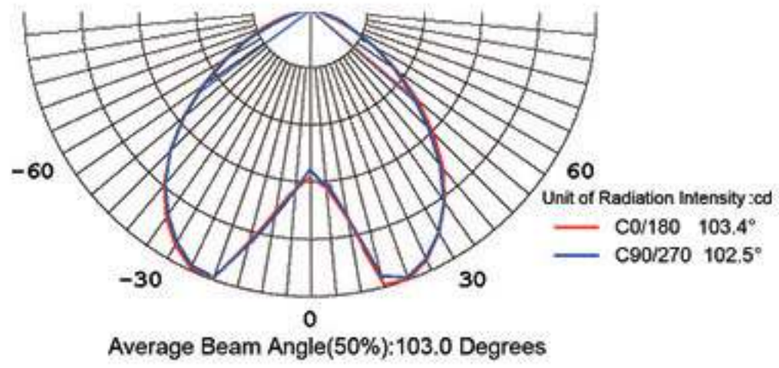


## Product Size

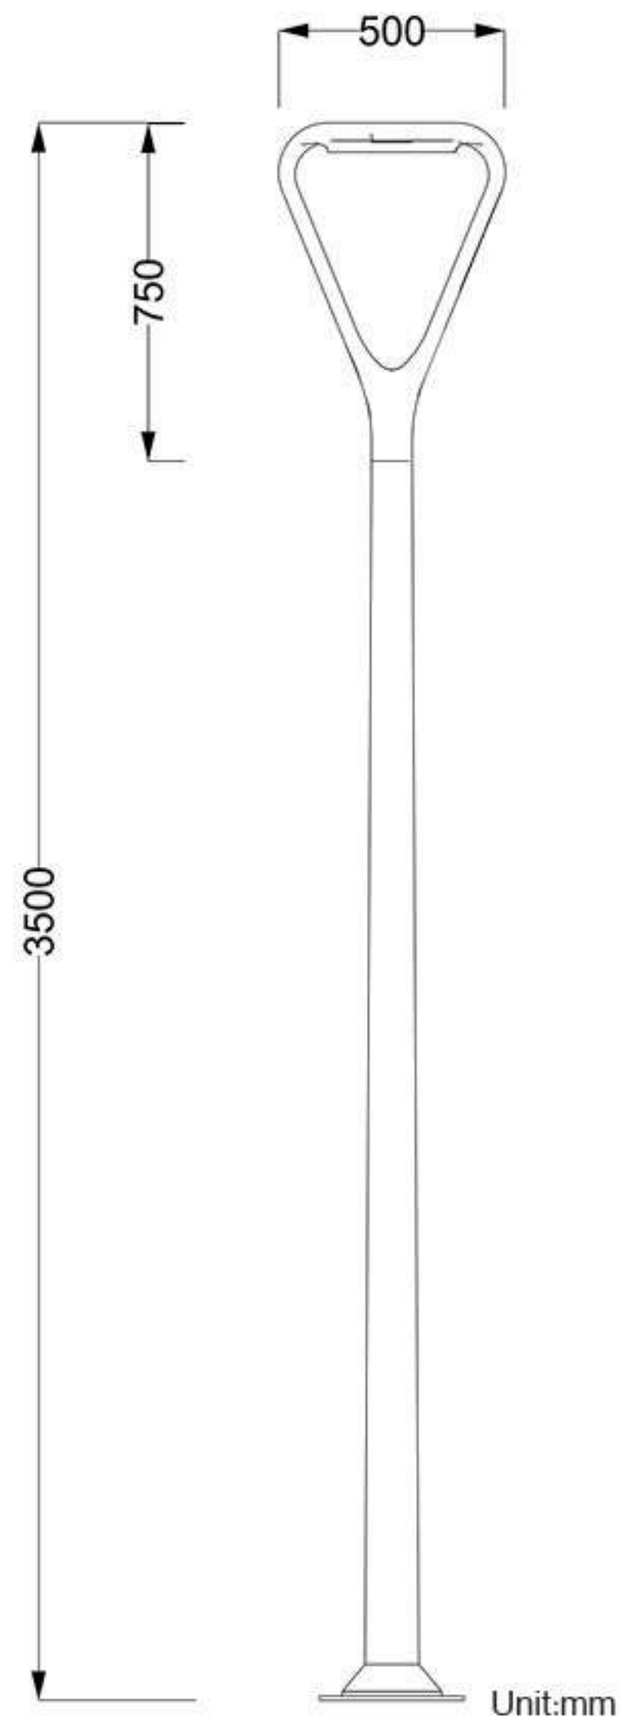


## Product Rendering



# MOON STAR



## Product Parameters


| PRODUCT NAME | MOON STAR |
|---|---|
| Product Size (mm) | φ550 X H500 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 5.8 ± 0.5kgs |

## Product Details





## Product Size

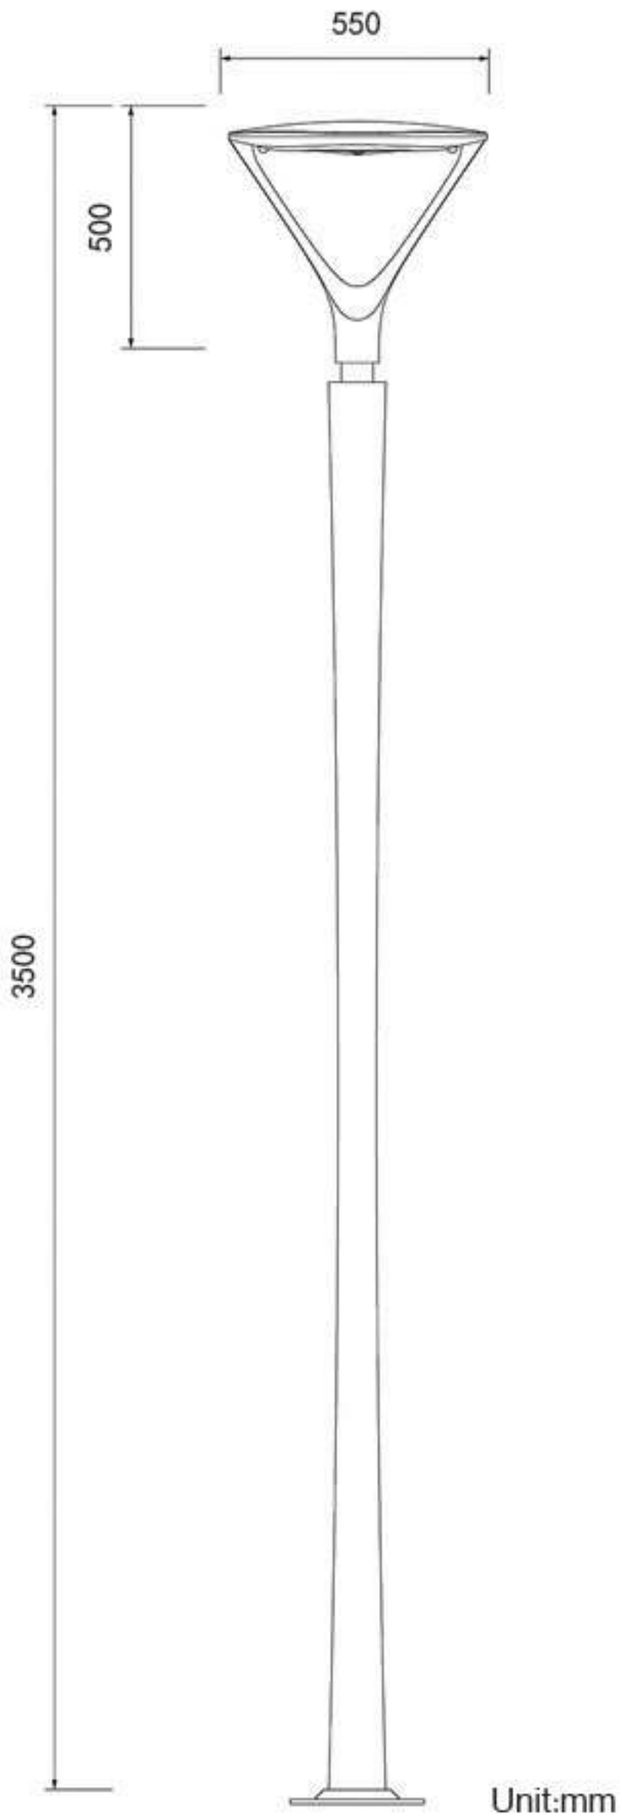


Unit:mm

## Product Rendering



# FAIRY



## Product Details






## Product Parameters


| PRODUCT NAME | FAIRY |
|---|---|
| Product Size (mm) | φ500 X H250 |
| Power | 30W / 60W / 90W |
| Efficiency | 120-150lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |

## Light Distribution Curve

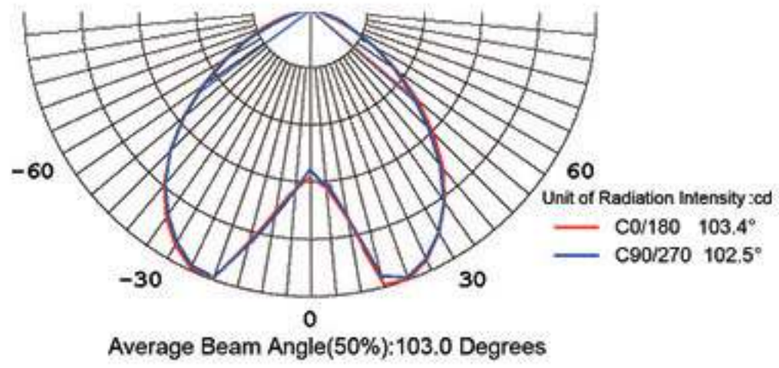


Average Beam Angle(50%):103.0 Degrees

## Product Size

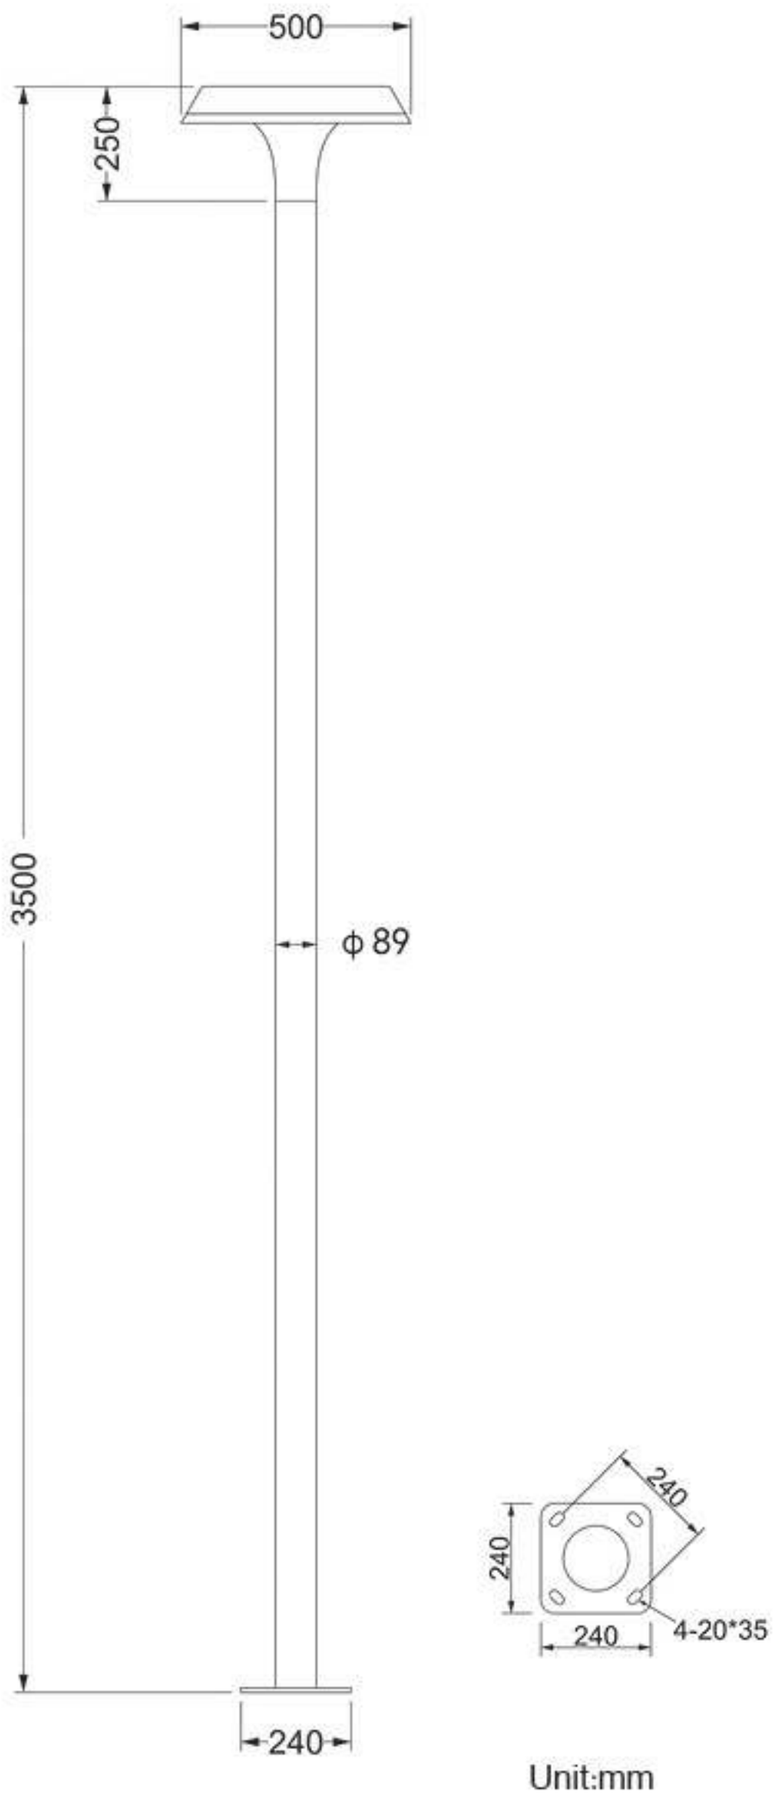



Unit:mm

## Product Rendering



# FLOURISH

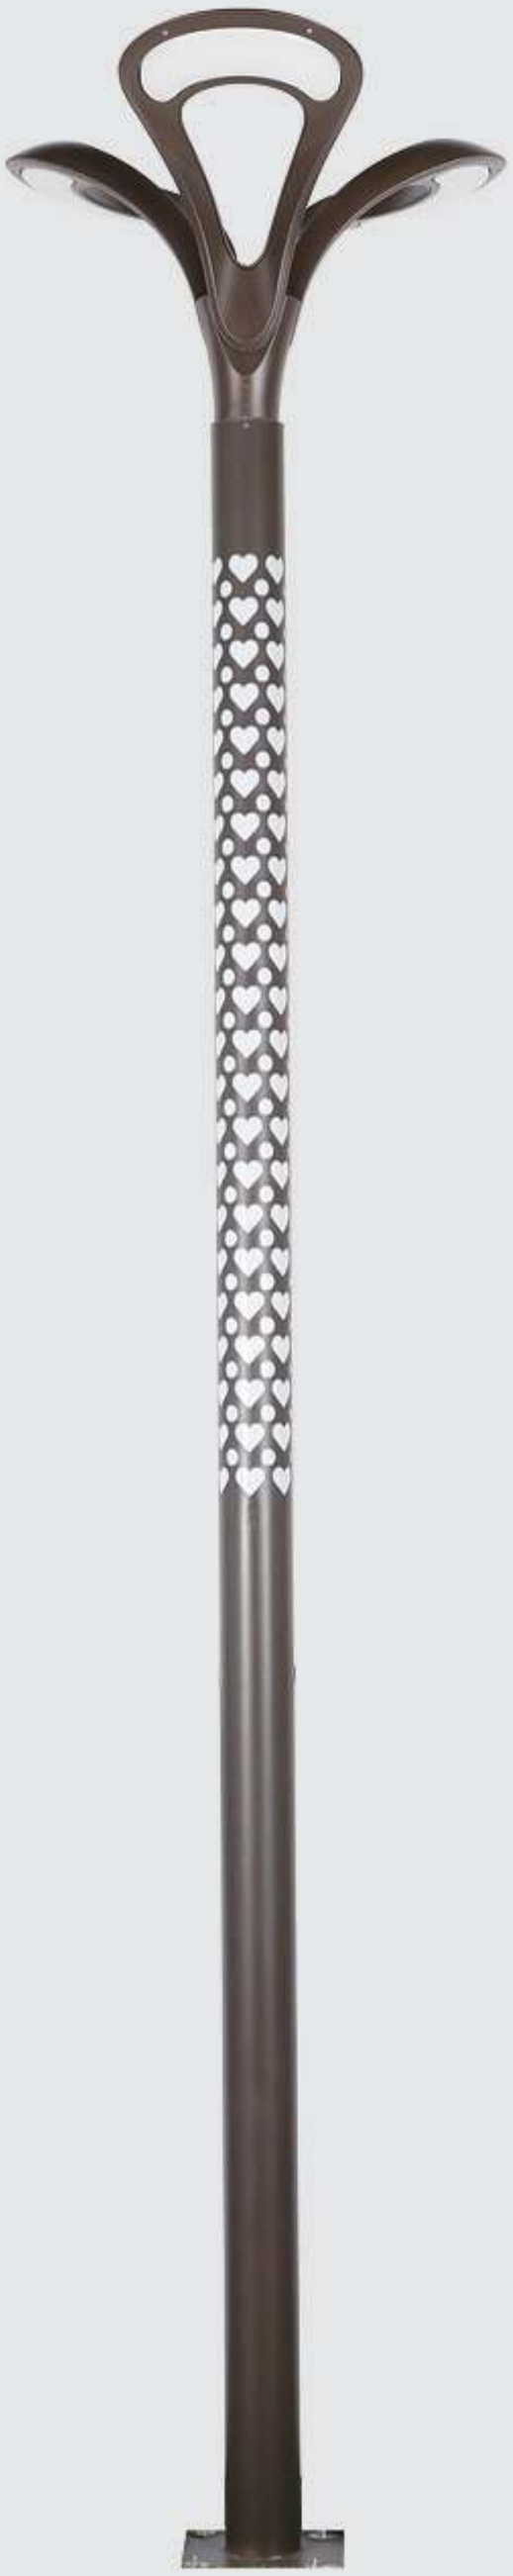

**Product Parameters**


| PRODUCT NAME | FLOURISH |
|---|---|
| Product Size (mm) | φ750 X H466 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum+201/304 Stainless Steel |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-8m |
| Warranty | 5 Years |
| Net Weight | 6.3 ± 0.5kgs |
| RGB Light Pole | RGB |

## Product Details





## Product Size

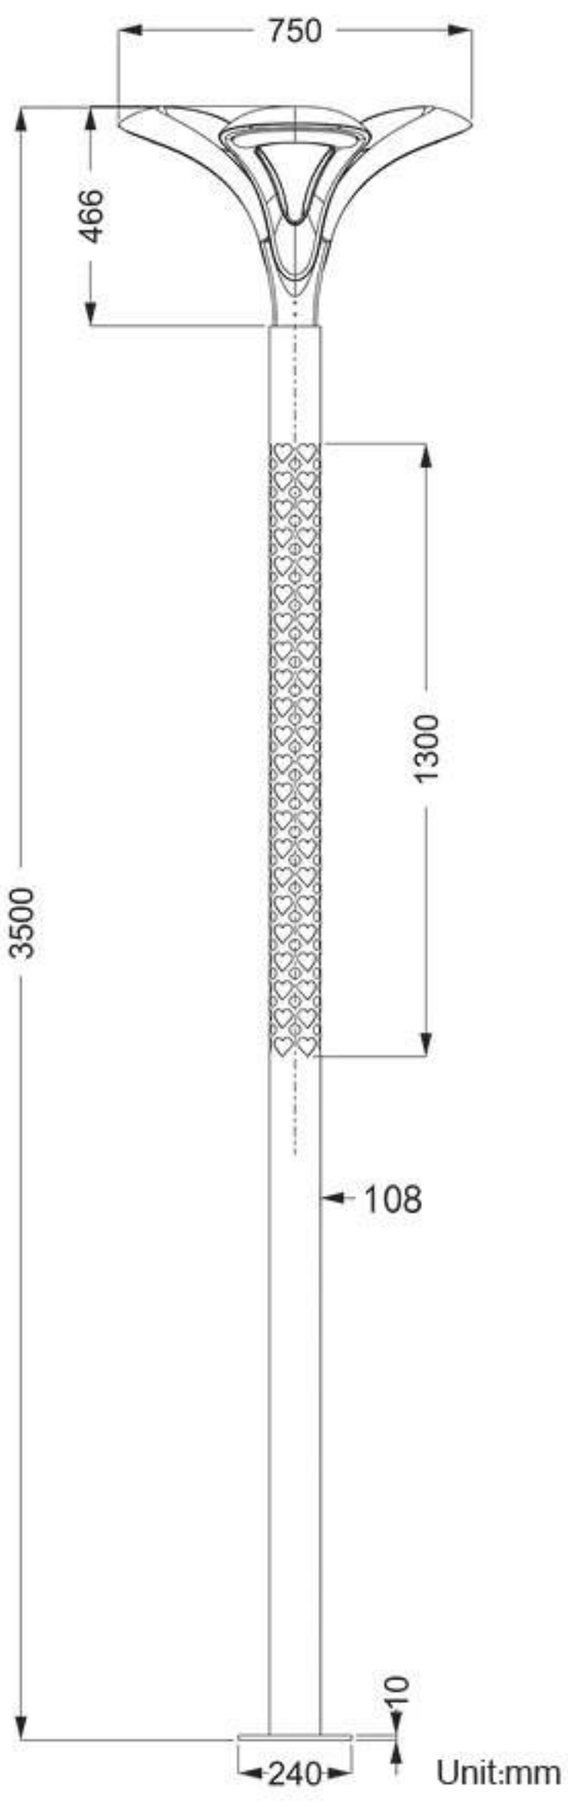


## Product Rendering



# CATHERINE



**Product Parameters**


| PRODUCT NAME | CATHERINE |
|---|---|
| Product Size (mm) | φ520 X H500 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5-4m |
| Warranty | 5 Years |
| Net Weight | 6 ± 0.5kgs（Housing） |

## Product Details





## Product Size

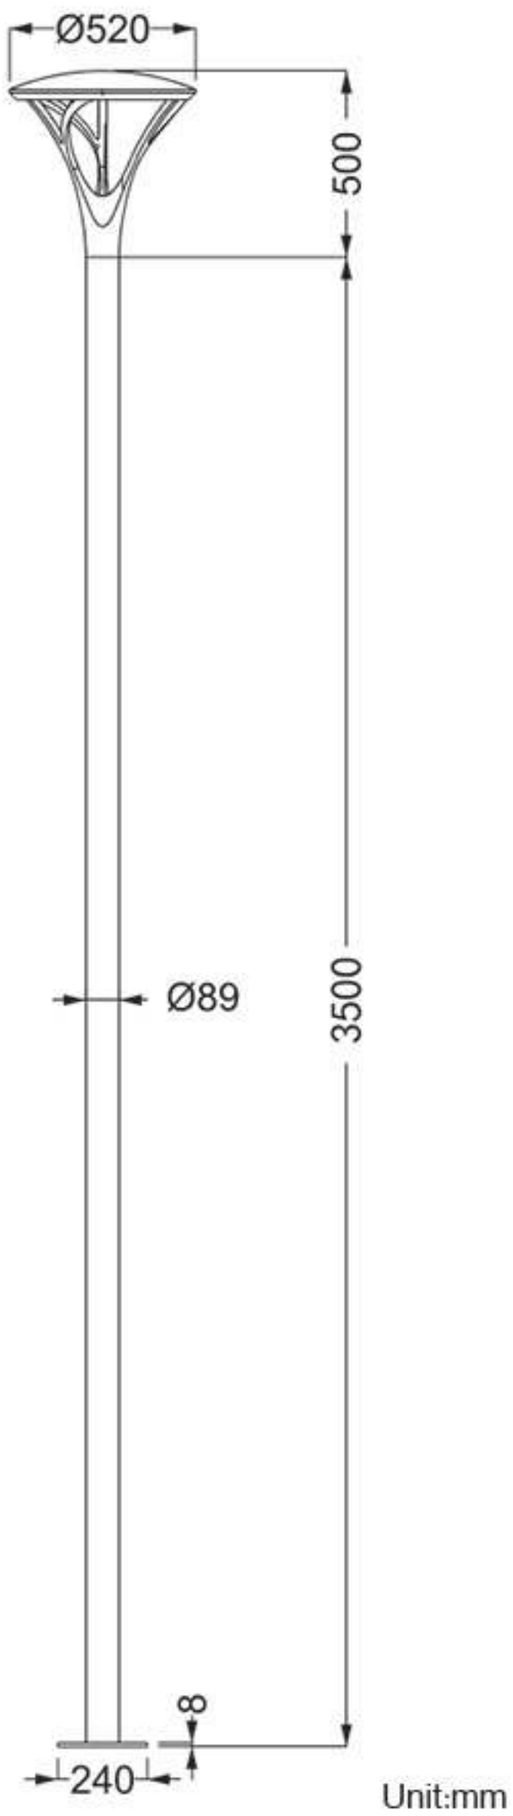


Unit:mm

## Product Rendering



# JUNON



**Product Parameters**


| PRODUCT NAME | JUNON |
|---|---|
| Product Size (mm) | φ520 X H580 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm/89mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 4 ± 0.5kgs |

## Product Details





## Product Size

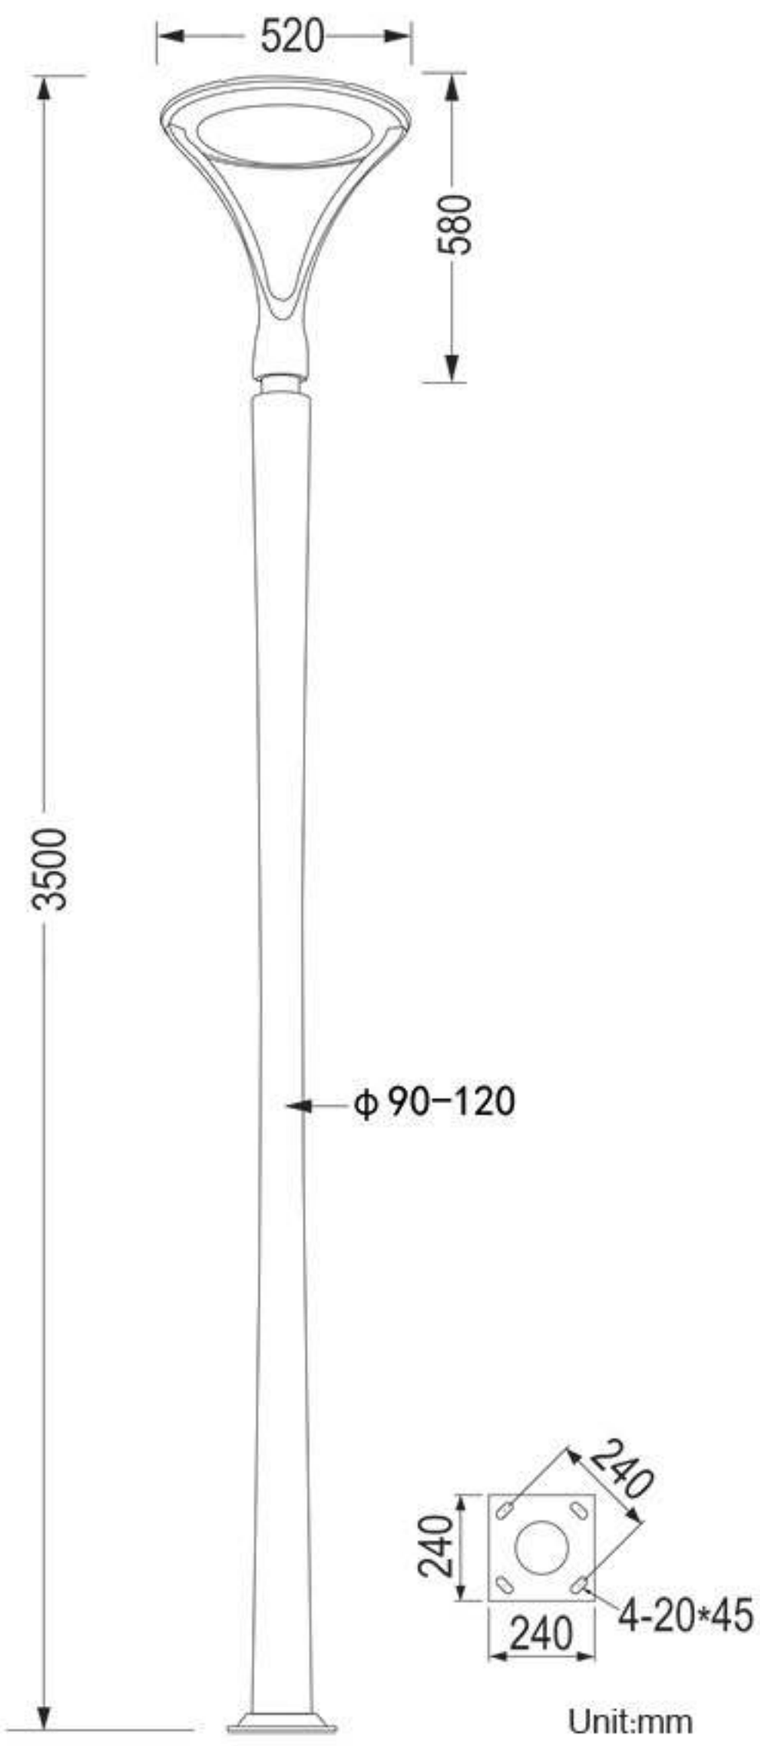


Unit:mm

## Product Rendering



# SUN



## Product Parameters


| PRODUCT NAME | SUN |
|---|---|
| Product Size (mm) | φ500 X H680 |
| Power | 30W / 50W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 6.5±0.5kgs |

## Product Details





## Product Size

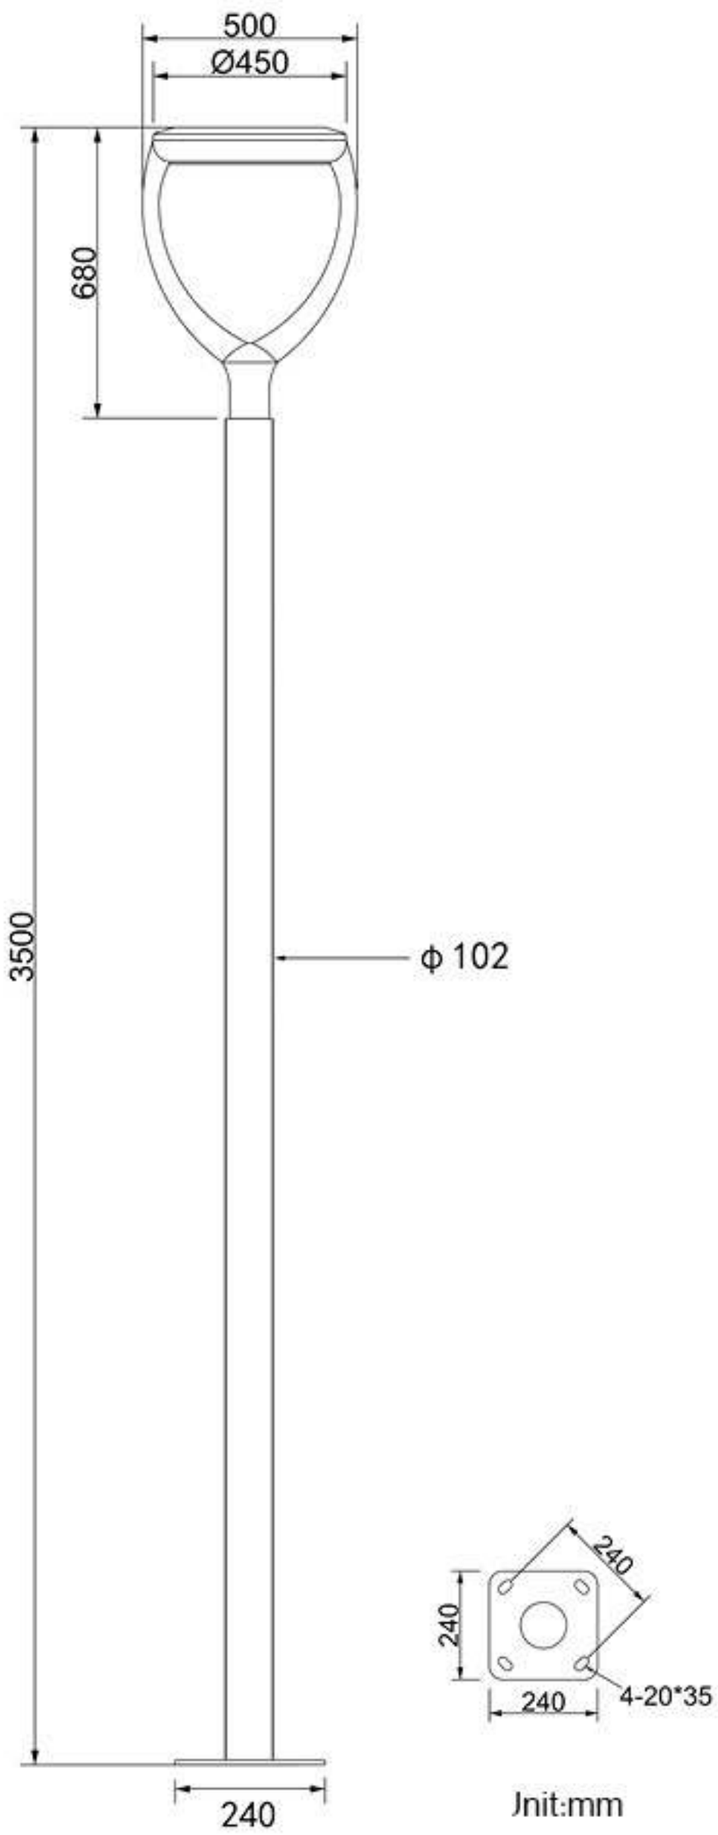


## Product Rendering



# VALIANT



**Product Parameters**


| PRODUCT NAME | VALIANT |
|---|---|
| Product Size (mm) | φ350 X H800 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-4m |
| Warranty | 5 Years |
| Net Weight | 3.3 ± 0.5kgs |

## Product Details





## Product Size

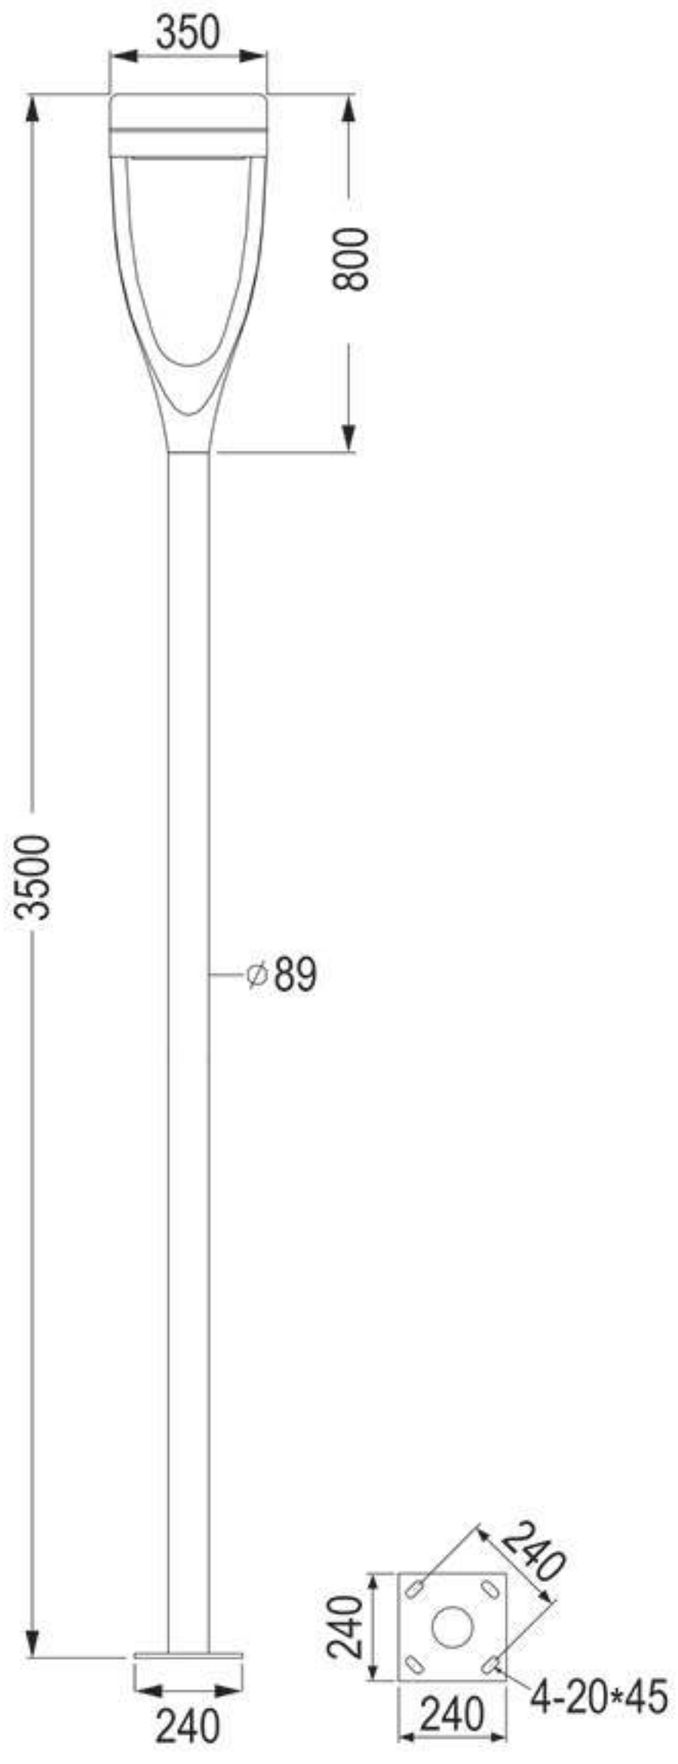



Unit:mm

## Product Rendering



# UFO

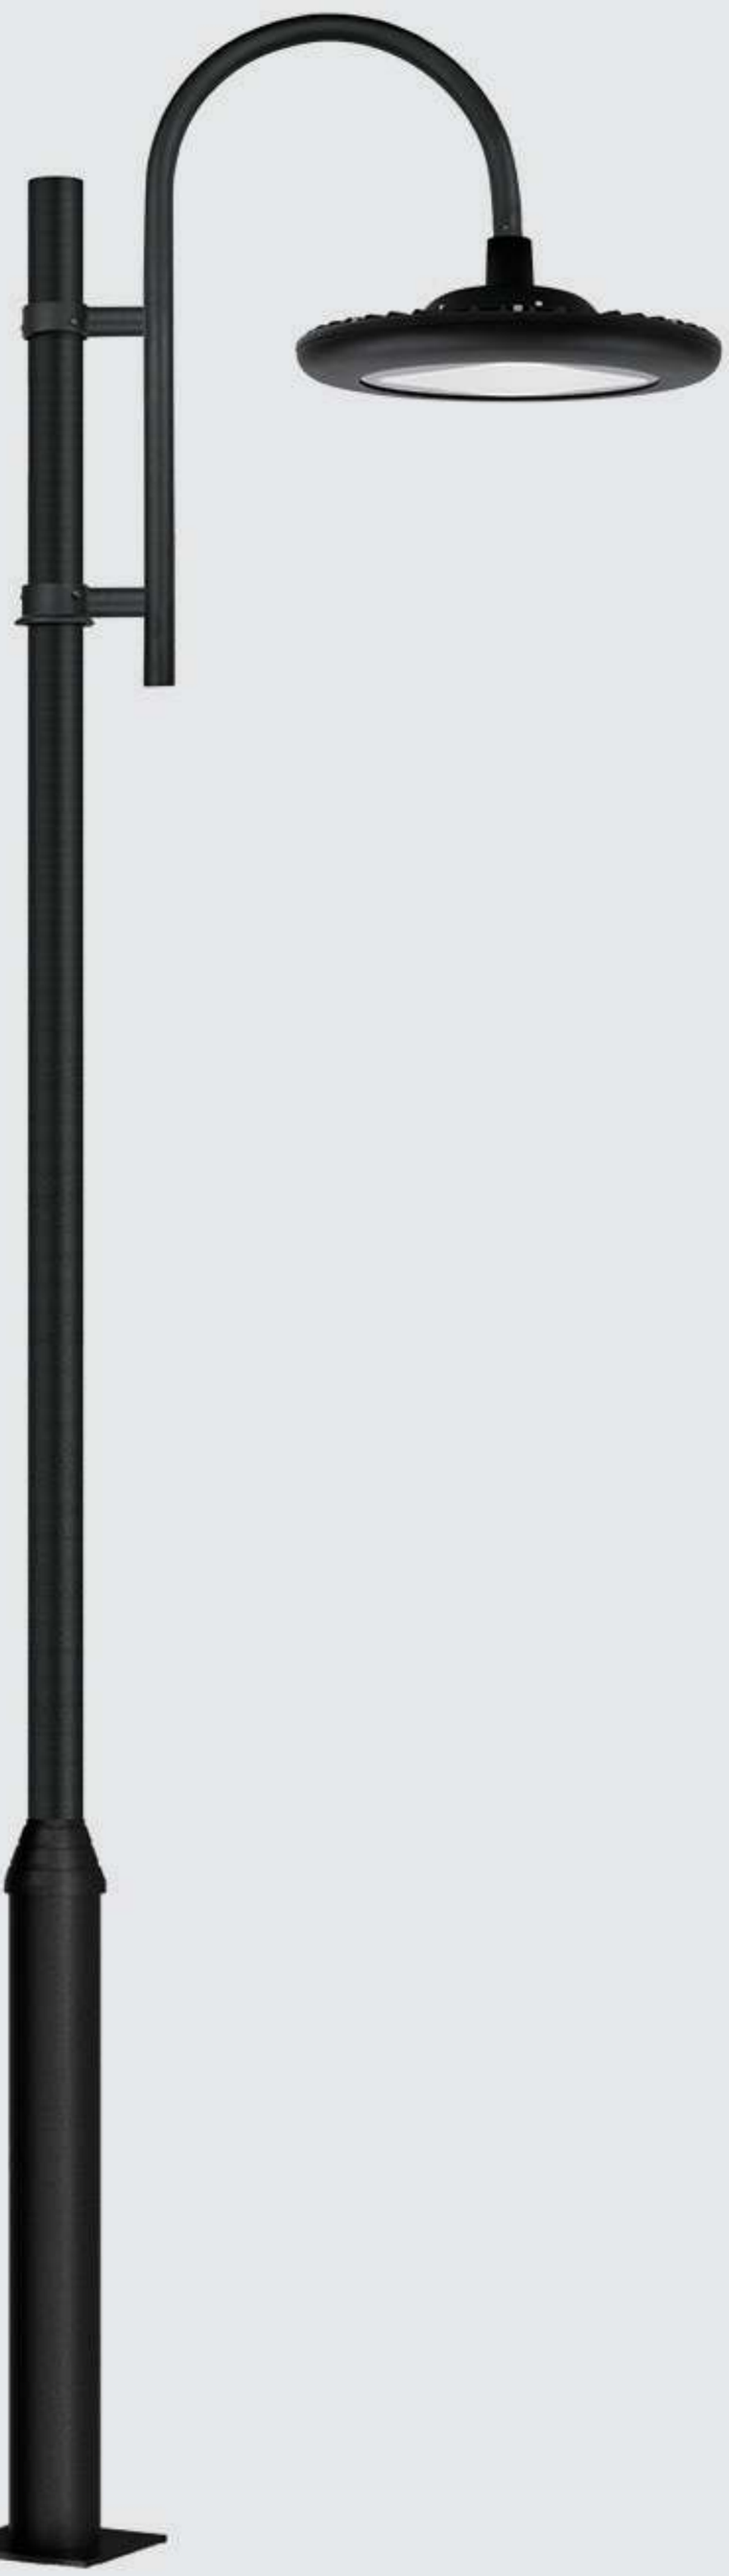

## Product Details







## Product Parameters

| PRODUCT NAME | UFO |
|---|---|
| Product Size (mm) | φ450 X H165 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | φ32mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 4.8 ± 0.5kgs |

## Light Distribution Curve

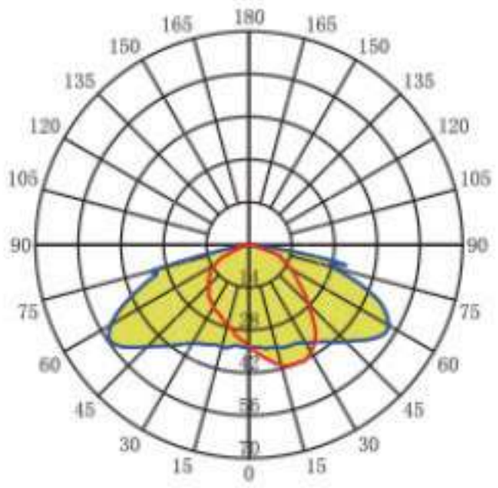



## Product Size

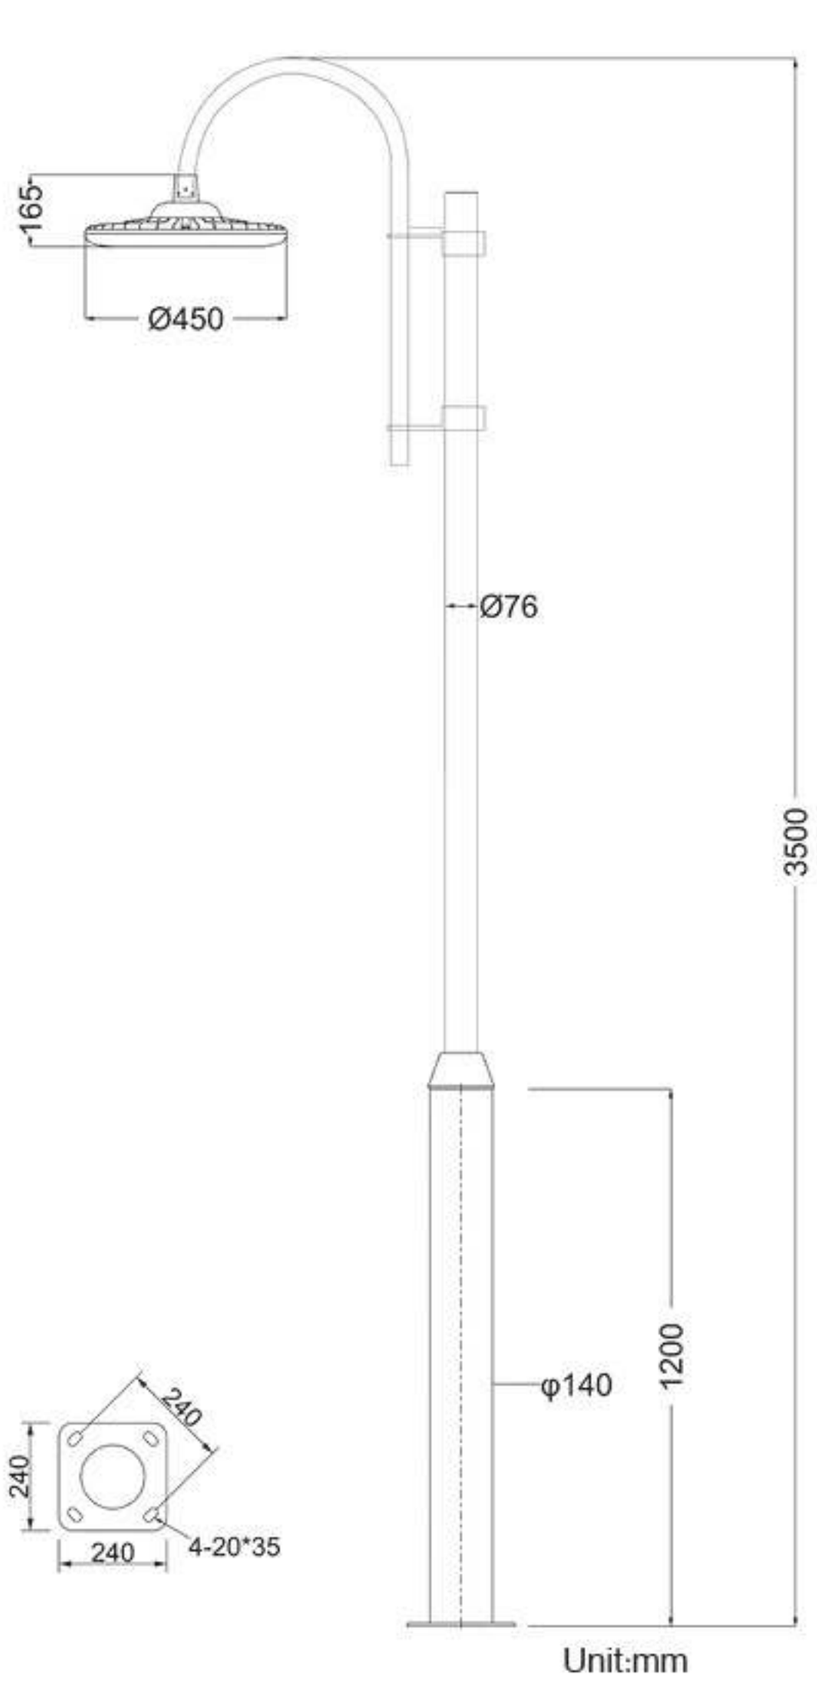


## Product Rendering



# SONUG

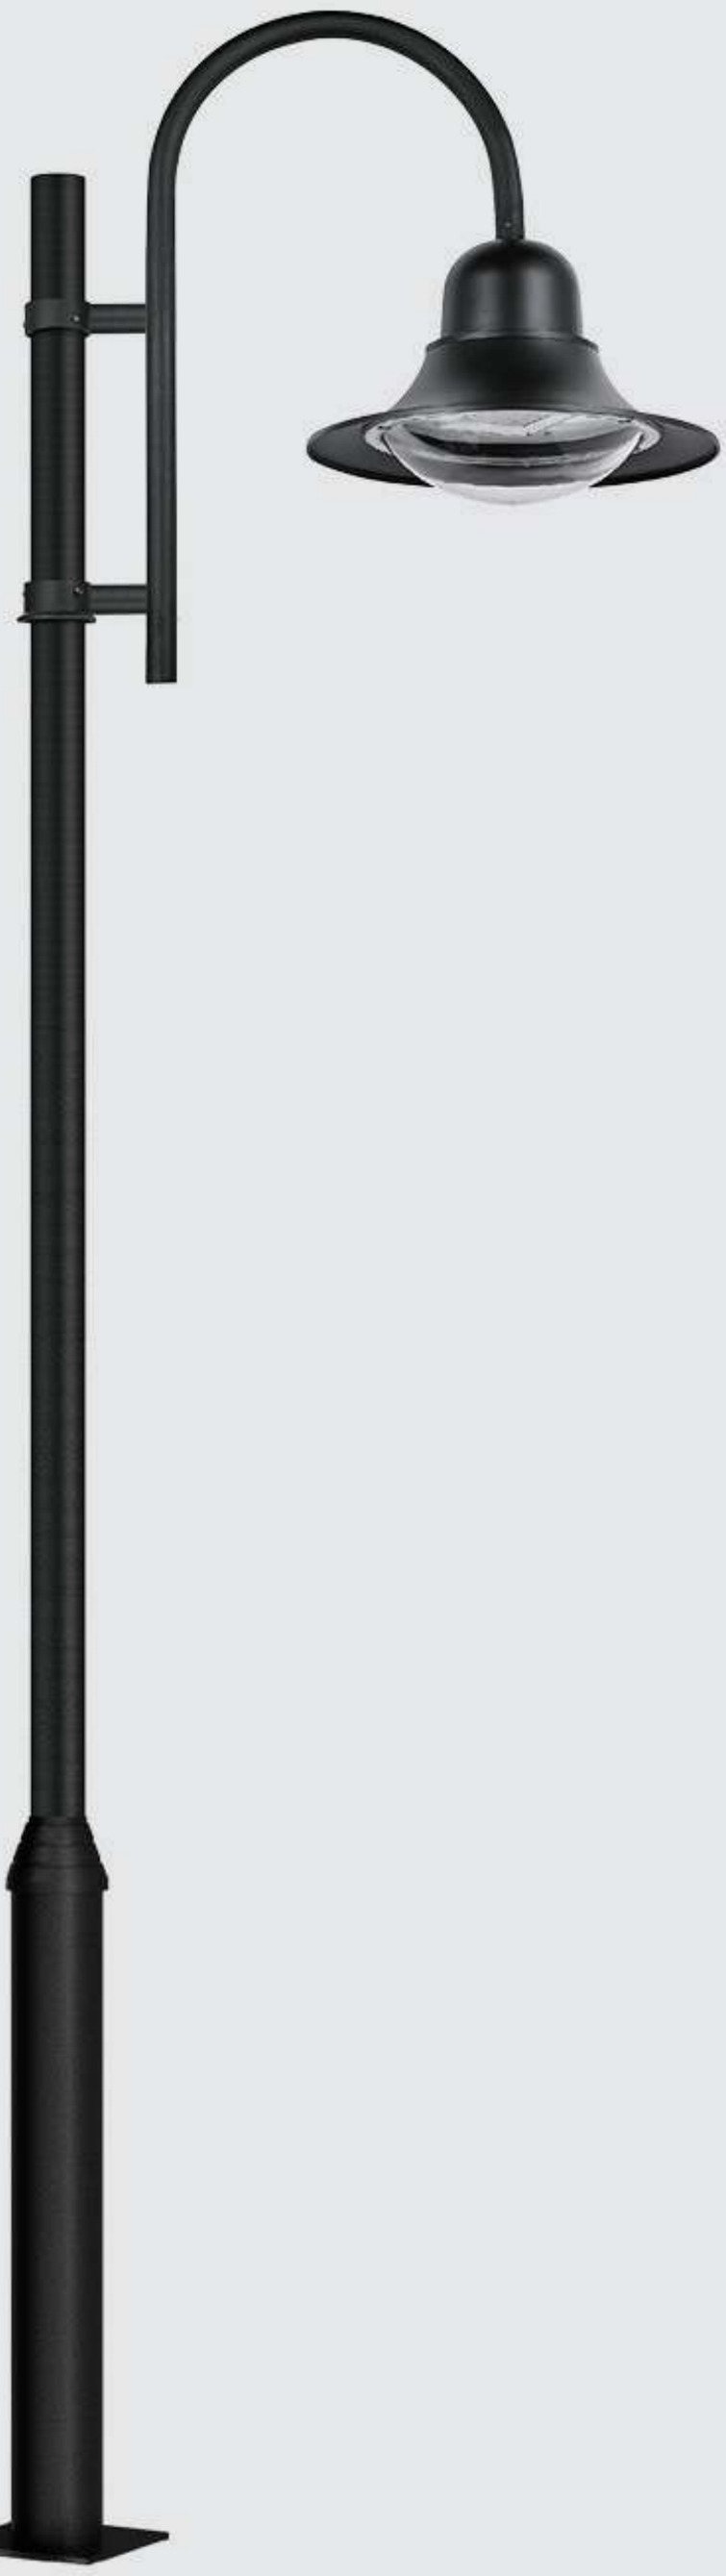

## Product Details







## Product Parameters

| PRODUCT NAME | SONUG |
|---|---|
| Product Size (mm) | φ560 X H400 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Module / Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | φ32mm |
| Suggested Mounting Height | 3-3.5-6m |
| Warranty | 5 Years |

## Light Distribution Curve

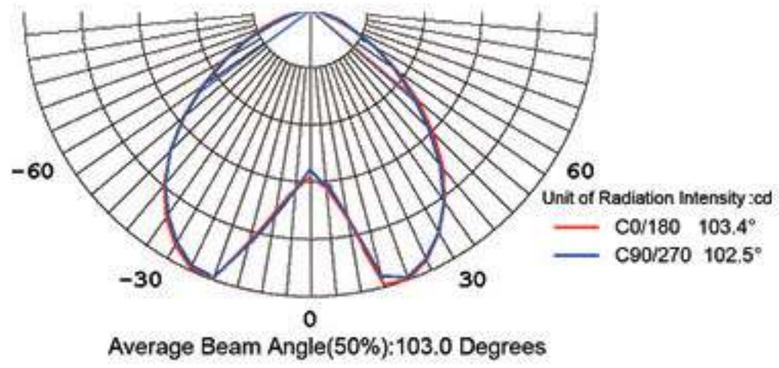


## Product Size

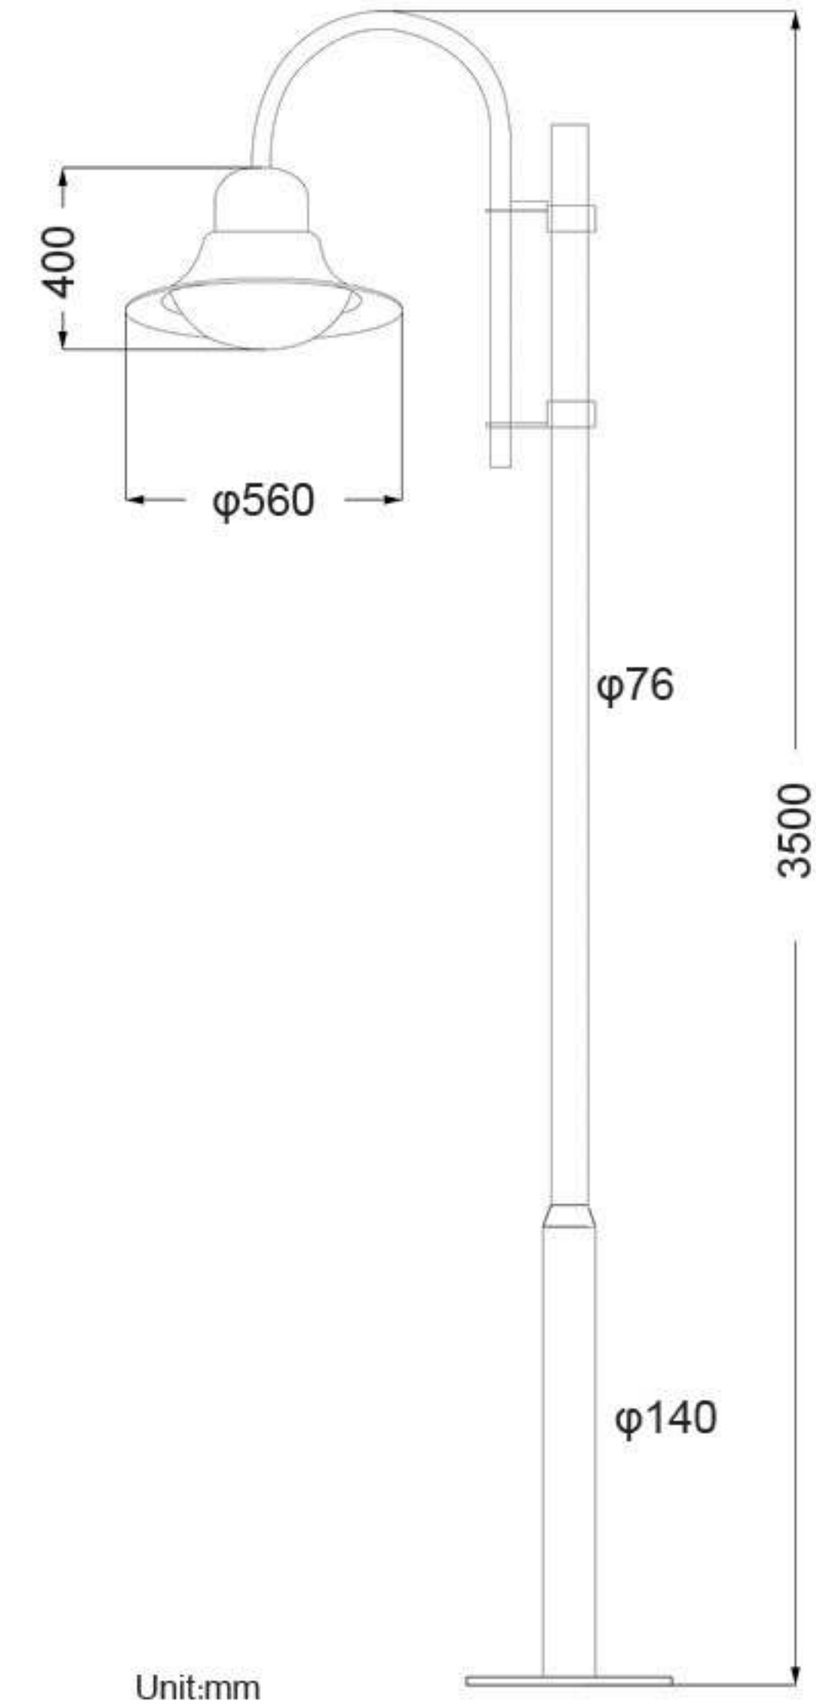



Unit:mm

## Product Rendering



# DROP

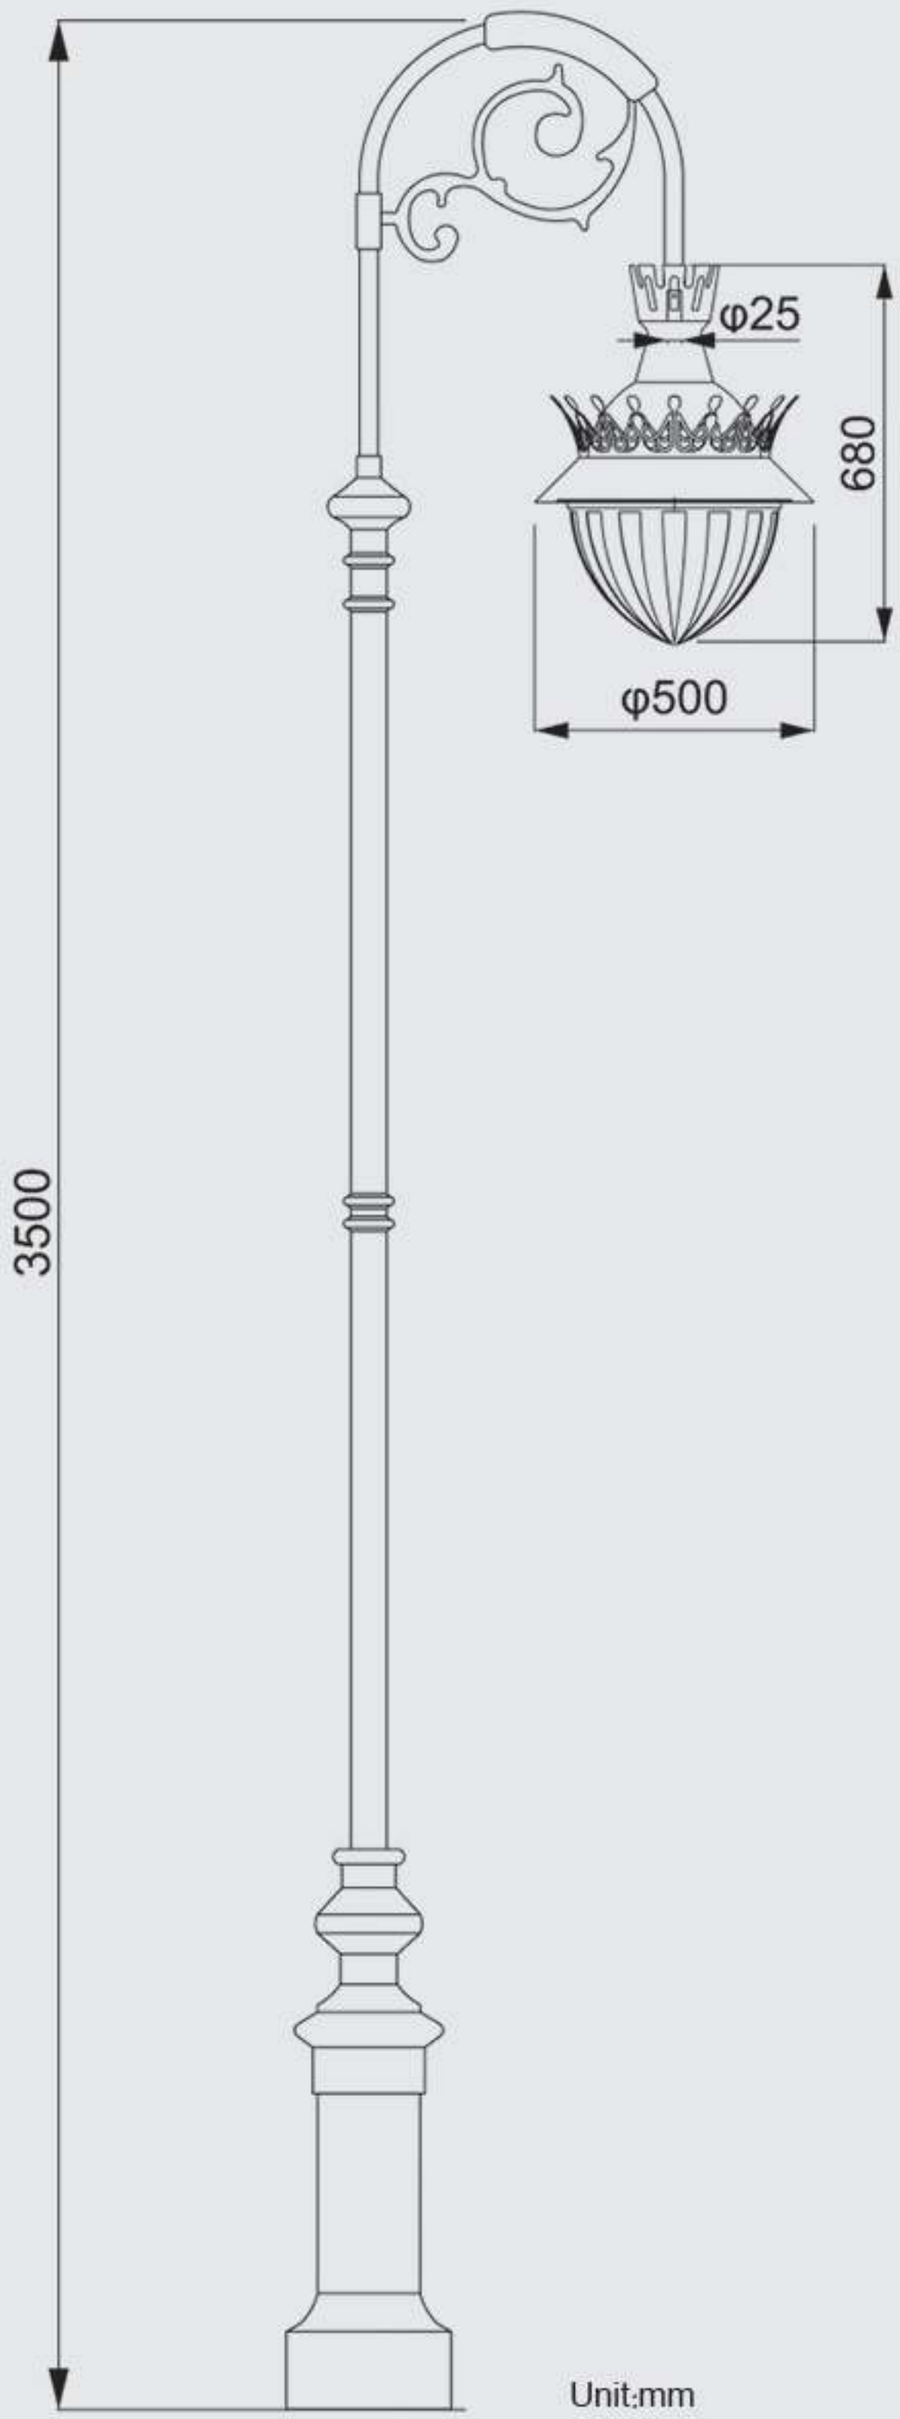


Unit:mm

## Product Parameters

| PRODUCT NAME | DROP |
|---|---|
| Product Size (mm) | φ500 X H680 |
| Power | 30W / 50W / 60W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |

## Product Details





## Product Rendering



# CLASSIC CROWN



## Product Details







## Product Parameters

| PRODUCT NAME | CLASSIC CROWN |
|---|---|
| Product Size (mm) | φ400 X H900 |
| Power | 30W / 60W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 3.7 ± 0.5kgs（Housing） |

## Light Distribution Curve

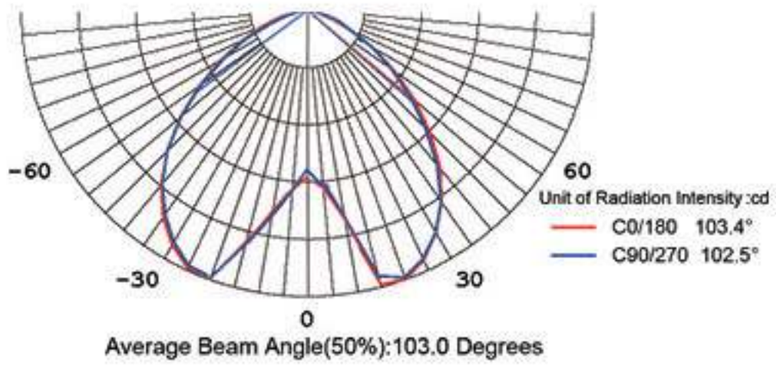


## Product Size

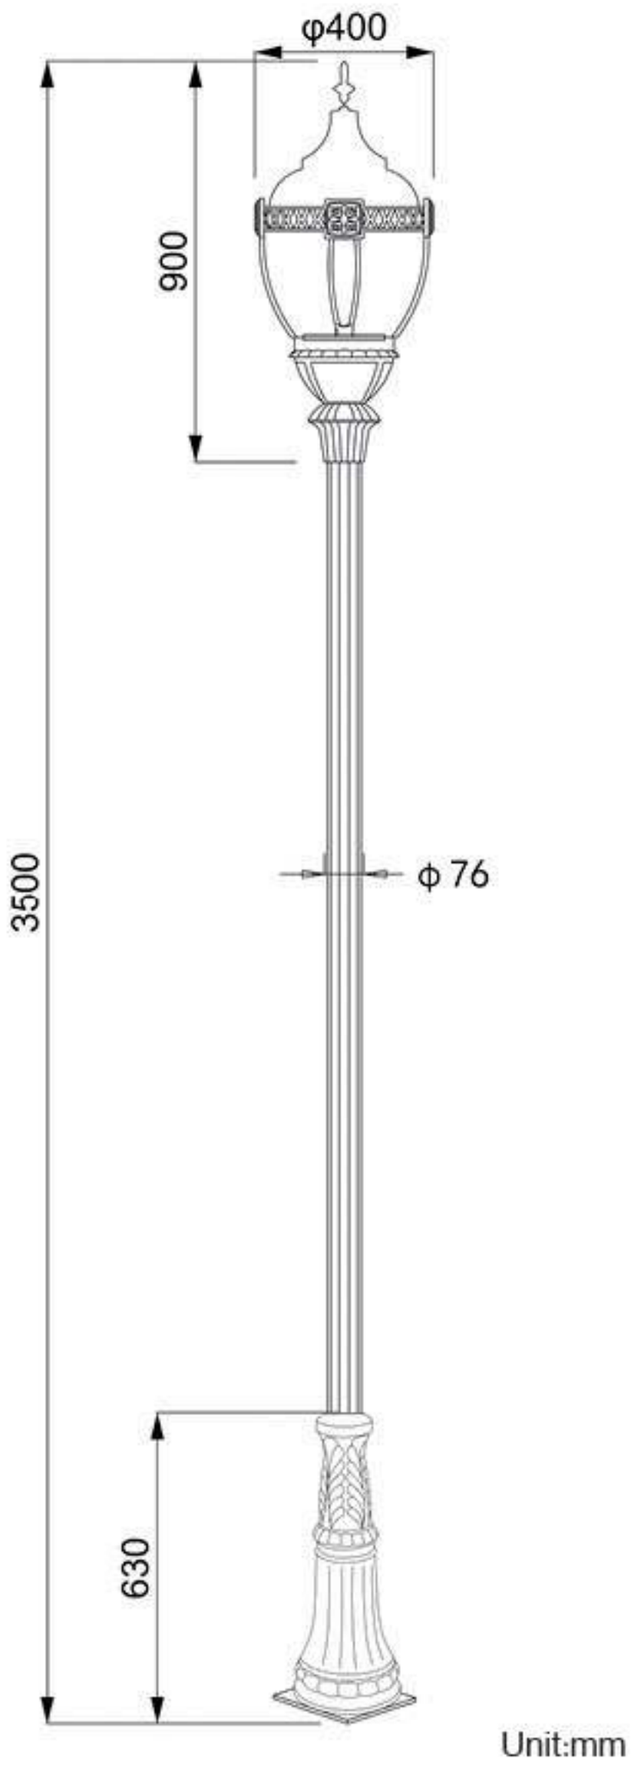


Unit:mm

## Product Rendering



# CROWN



**Product Parameters**


| PRODUCT NAME | CROWN |
|---|---|
| Product Size (mm) | φ450 X H1000 |
| Power | 30W / 50W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5-4m |
| Warranty | 5 Years |

## Product Details





## Product Size

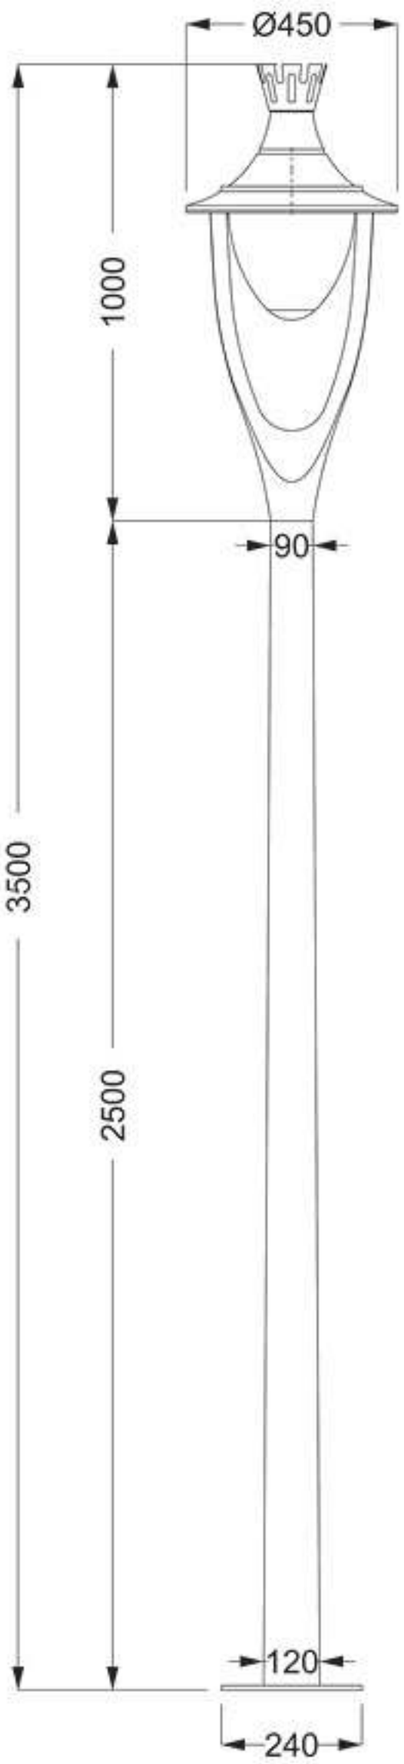


Unit:mm

## Product Rendering



# LANTERN



## Product Details







## Product Parameters

| PRODUCT NAME | LANTERN |
|---|---|
| Product Size (mm) | 400 X 400 X 780 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Module / Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |
| Net Weight | 5.5 ± 0.5kgs |

## Light Distribution Curve

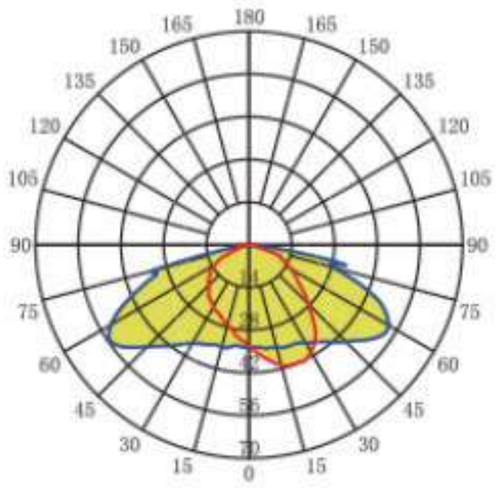


## Product Size

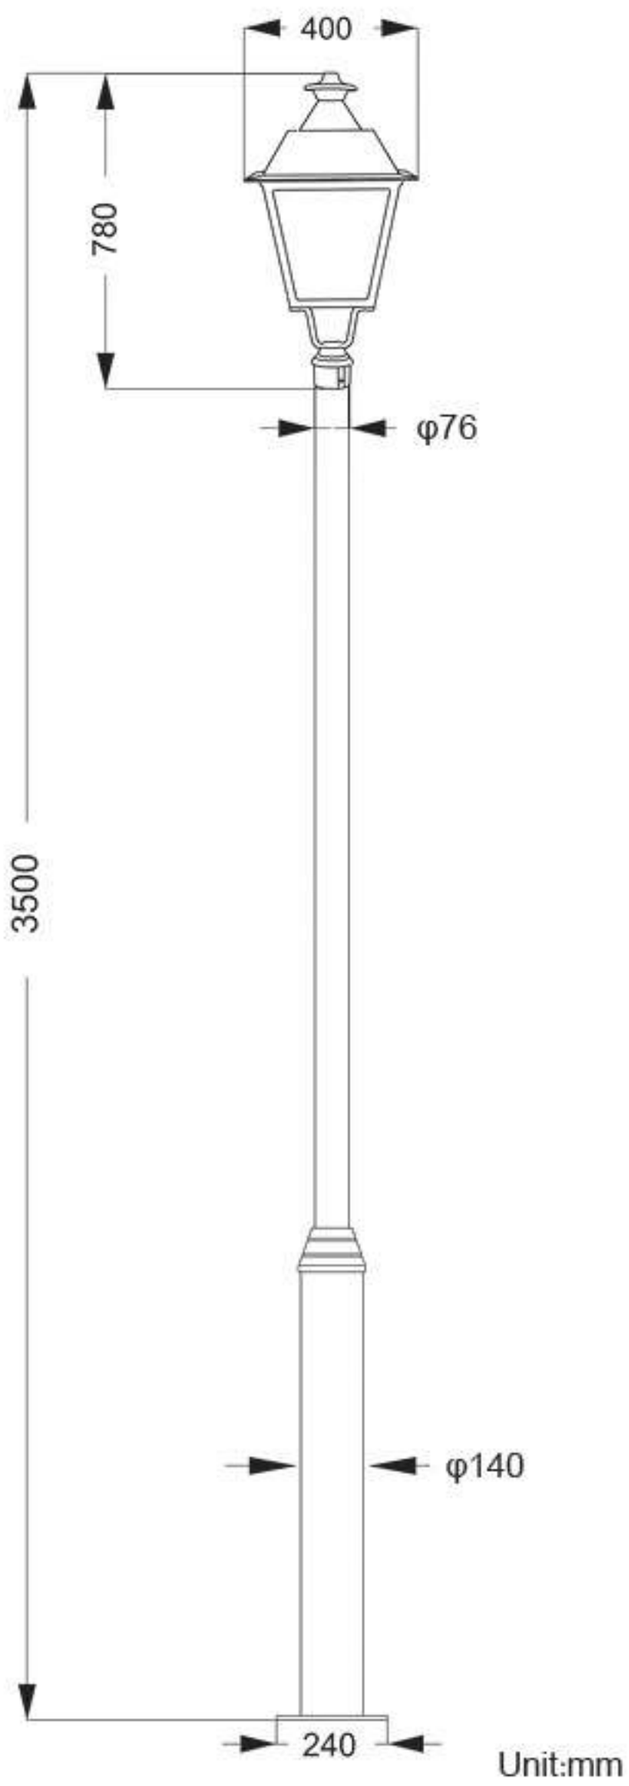


## Product Rendering



# WATER



## Product Details






## Product Parameters


| PRODUCT NAME | WATER |
|---|---|
| Product Size (mm) | φ450 X H1000 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 10.5 ± 0.5kgs |

## Light Distribution Curve

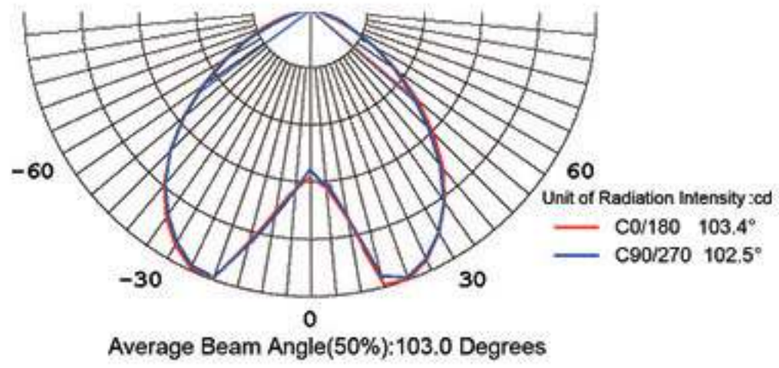


Average Beam Angle(50%):103.0 Degrees

## Product Size

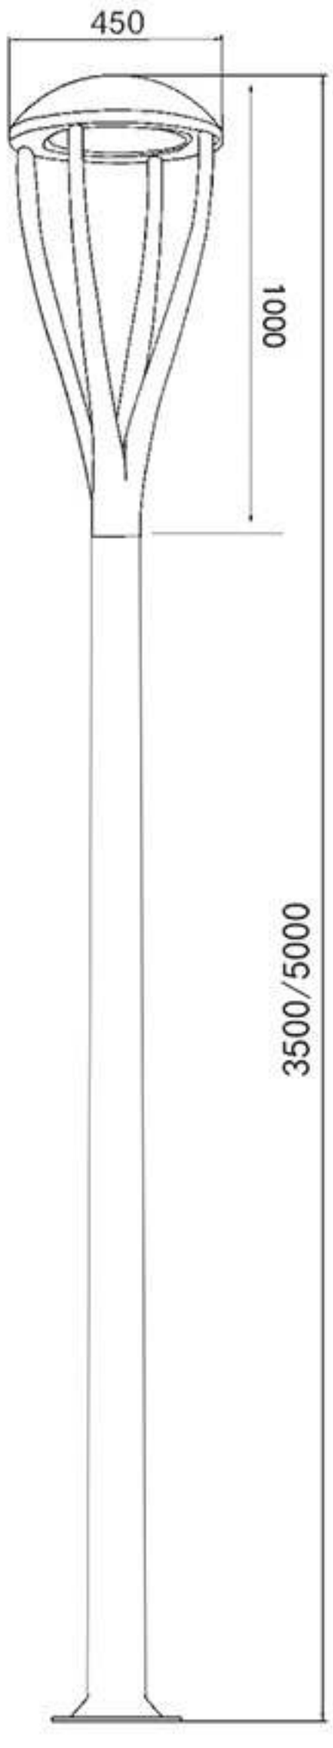



Unit:mm


## Product Rendering



# GLISTEN



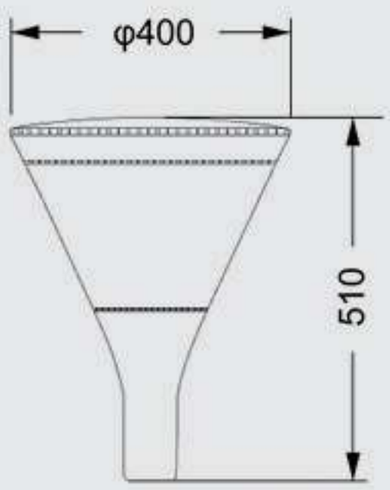

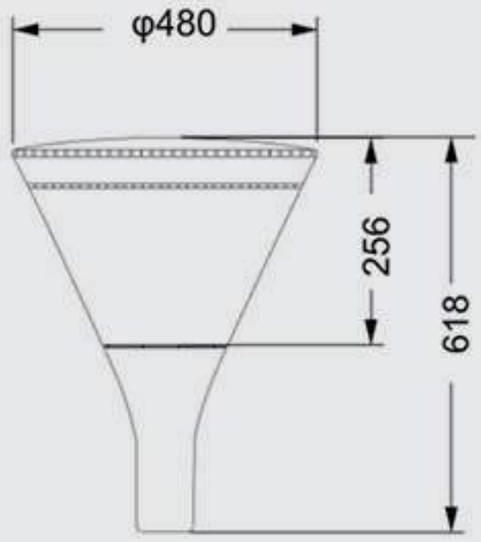
**Product Parameters**

| PRODUCT NAME | GLISTEN |
|---|---|
| Product Size (mm) | A: φ400 X H510<br>B: φ480 X H618 |
| Power | 50W / 65W / 85W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 60mm / 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |

## Product Details





## Product Rendering



# STARRY SKY



## Product Details






## Product Parameters


| PRODUCT NAME | STARRY SKY |
|---|---|
| Product Size (mm) | φ520 X H550 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |

## Light Distribution Curve

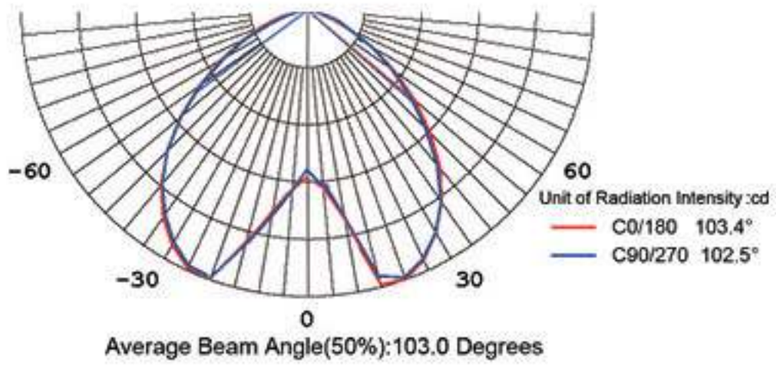



Average Beam Angle(50%):103.0 Degrees


## Product Size

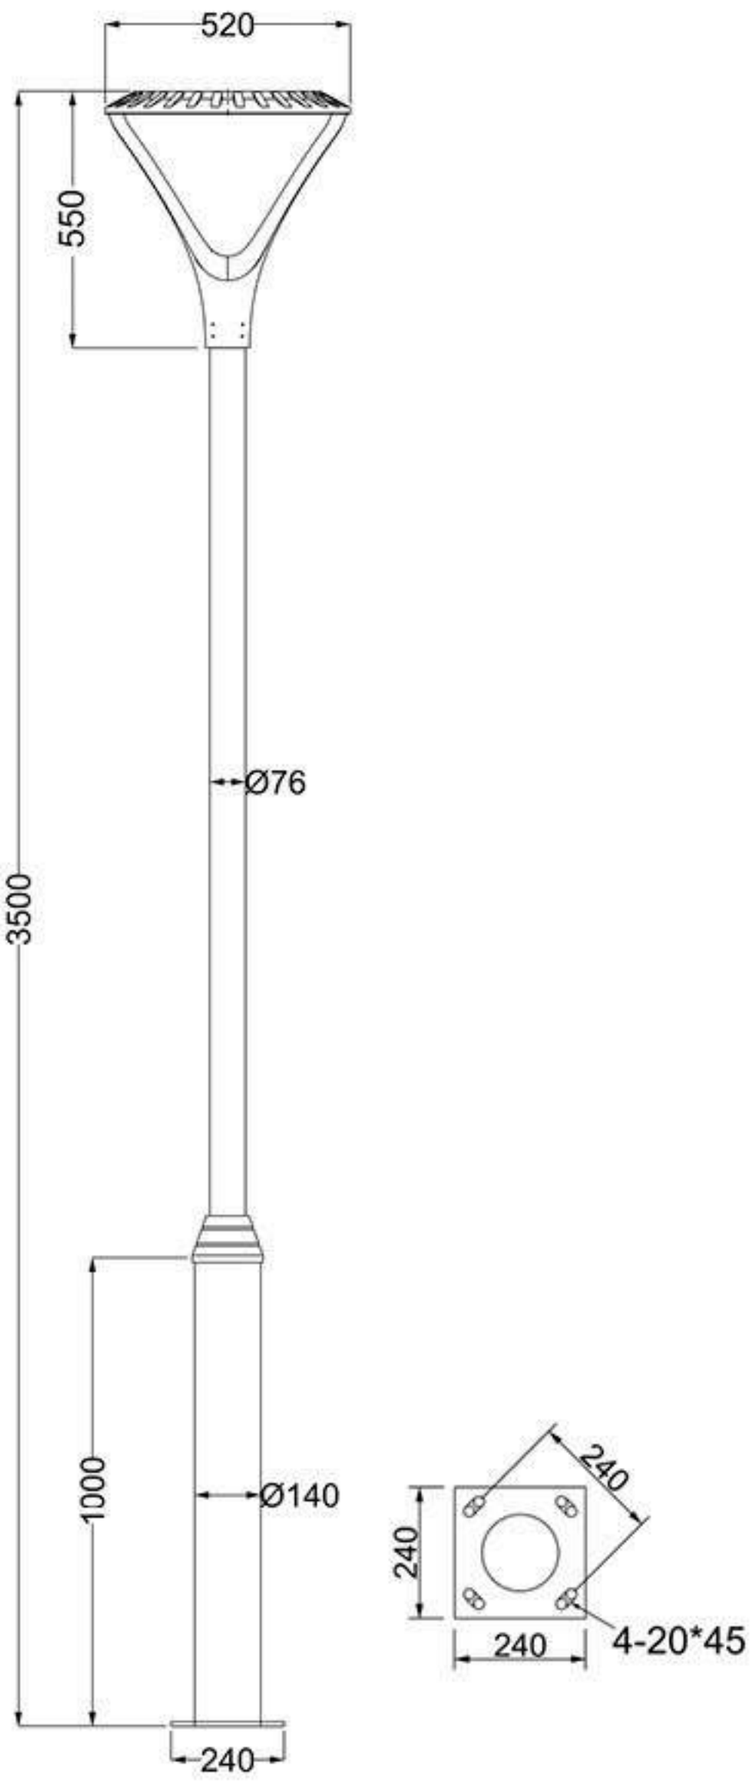



## Product Rendering

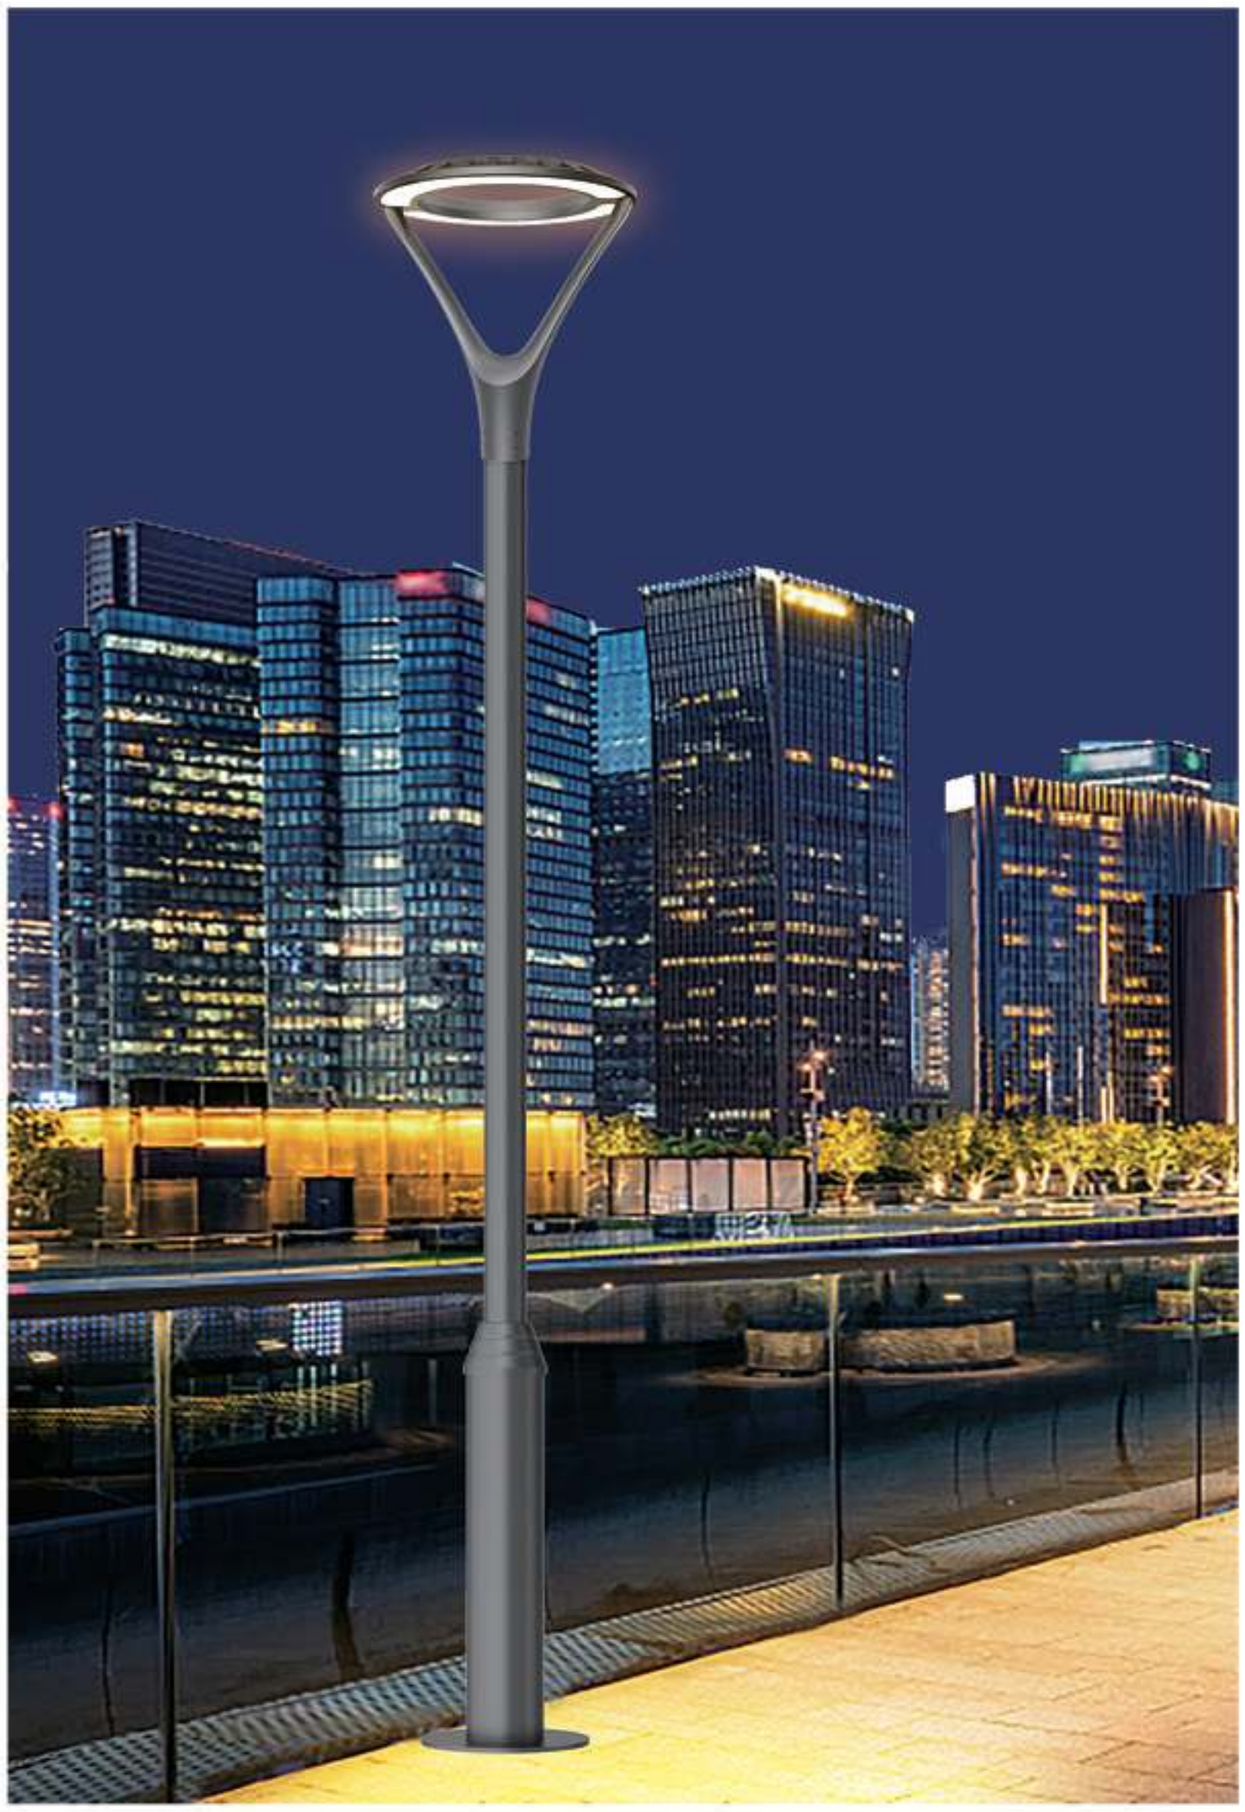

# YT-OX-A

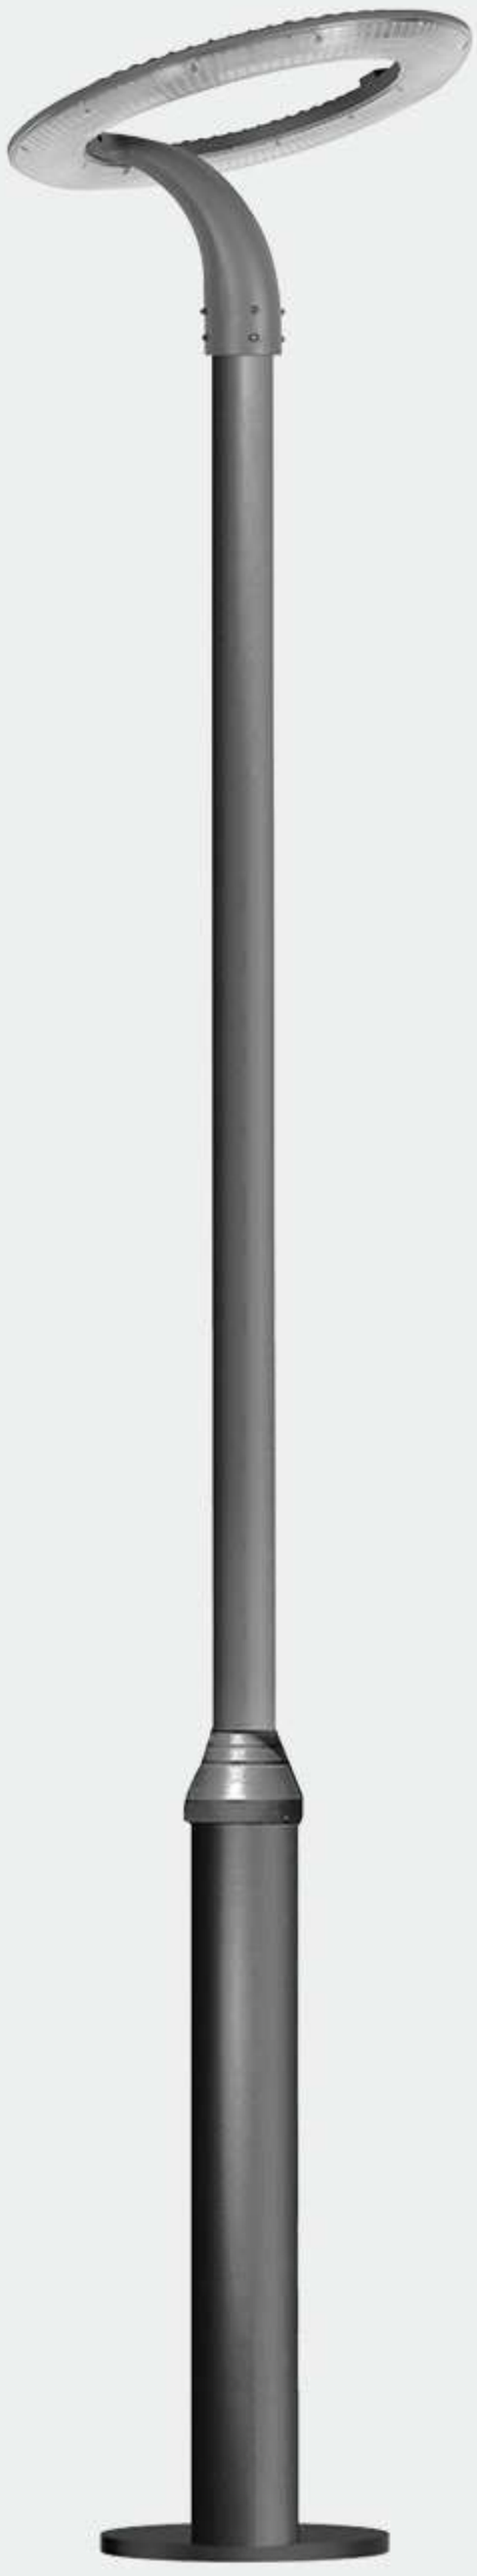

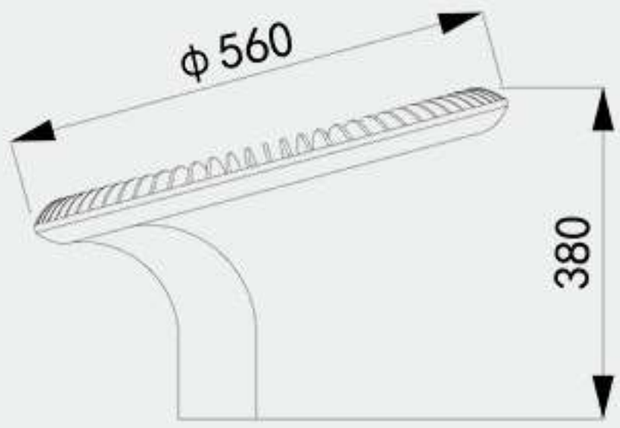



Unit:mm

## Product Parameters

| PRODUCT NAME | YT-OX-A |
|---|---|
| Product Size (mm) | φ560 X H500 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-4m |
| Warranty | 5 Years |
| Net Weight | 4.3 ± 0.5kgs |


# YT-OX-E

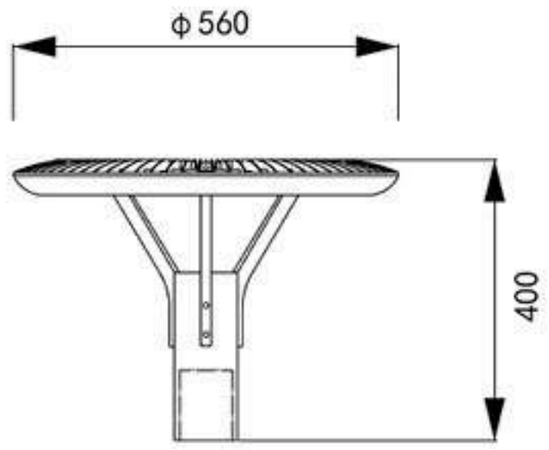


Unit:mm



# CHARLES

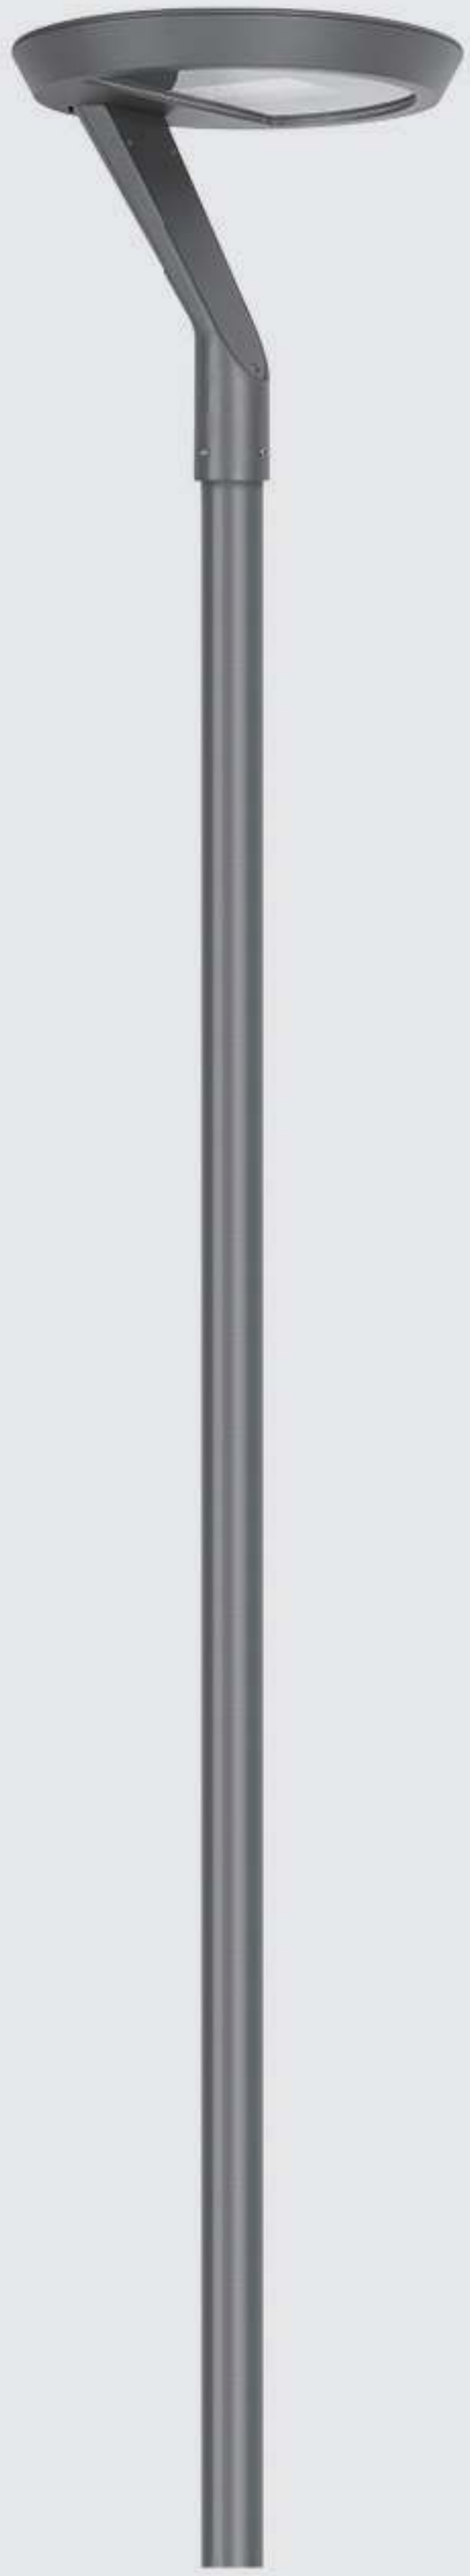

## Product Details







## Product Parameters

| PRODUCT NAME | CHARLES |
|---|---|
| Product Size (mm) | φ400 X H266 |
| Power | 30W / 50W / 70W / 100W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 60mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 5 Years |

## Light Distribution Curve

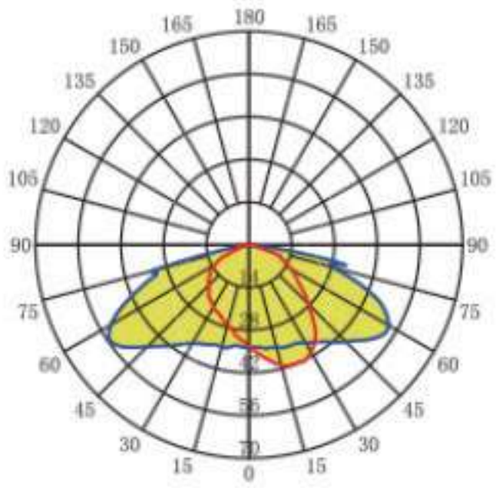



## Product Size

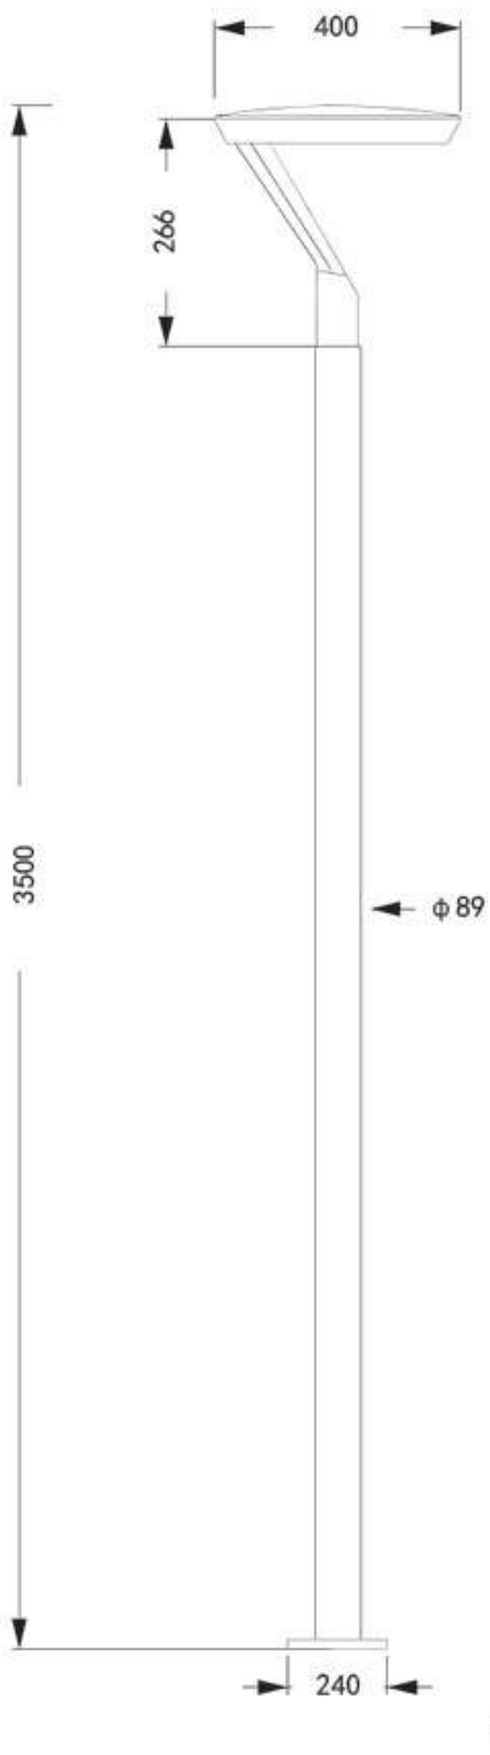



Unit:mm

## Product Rendering

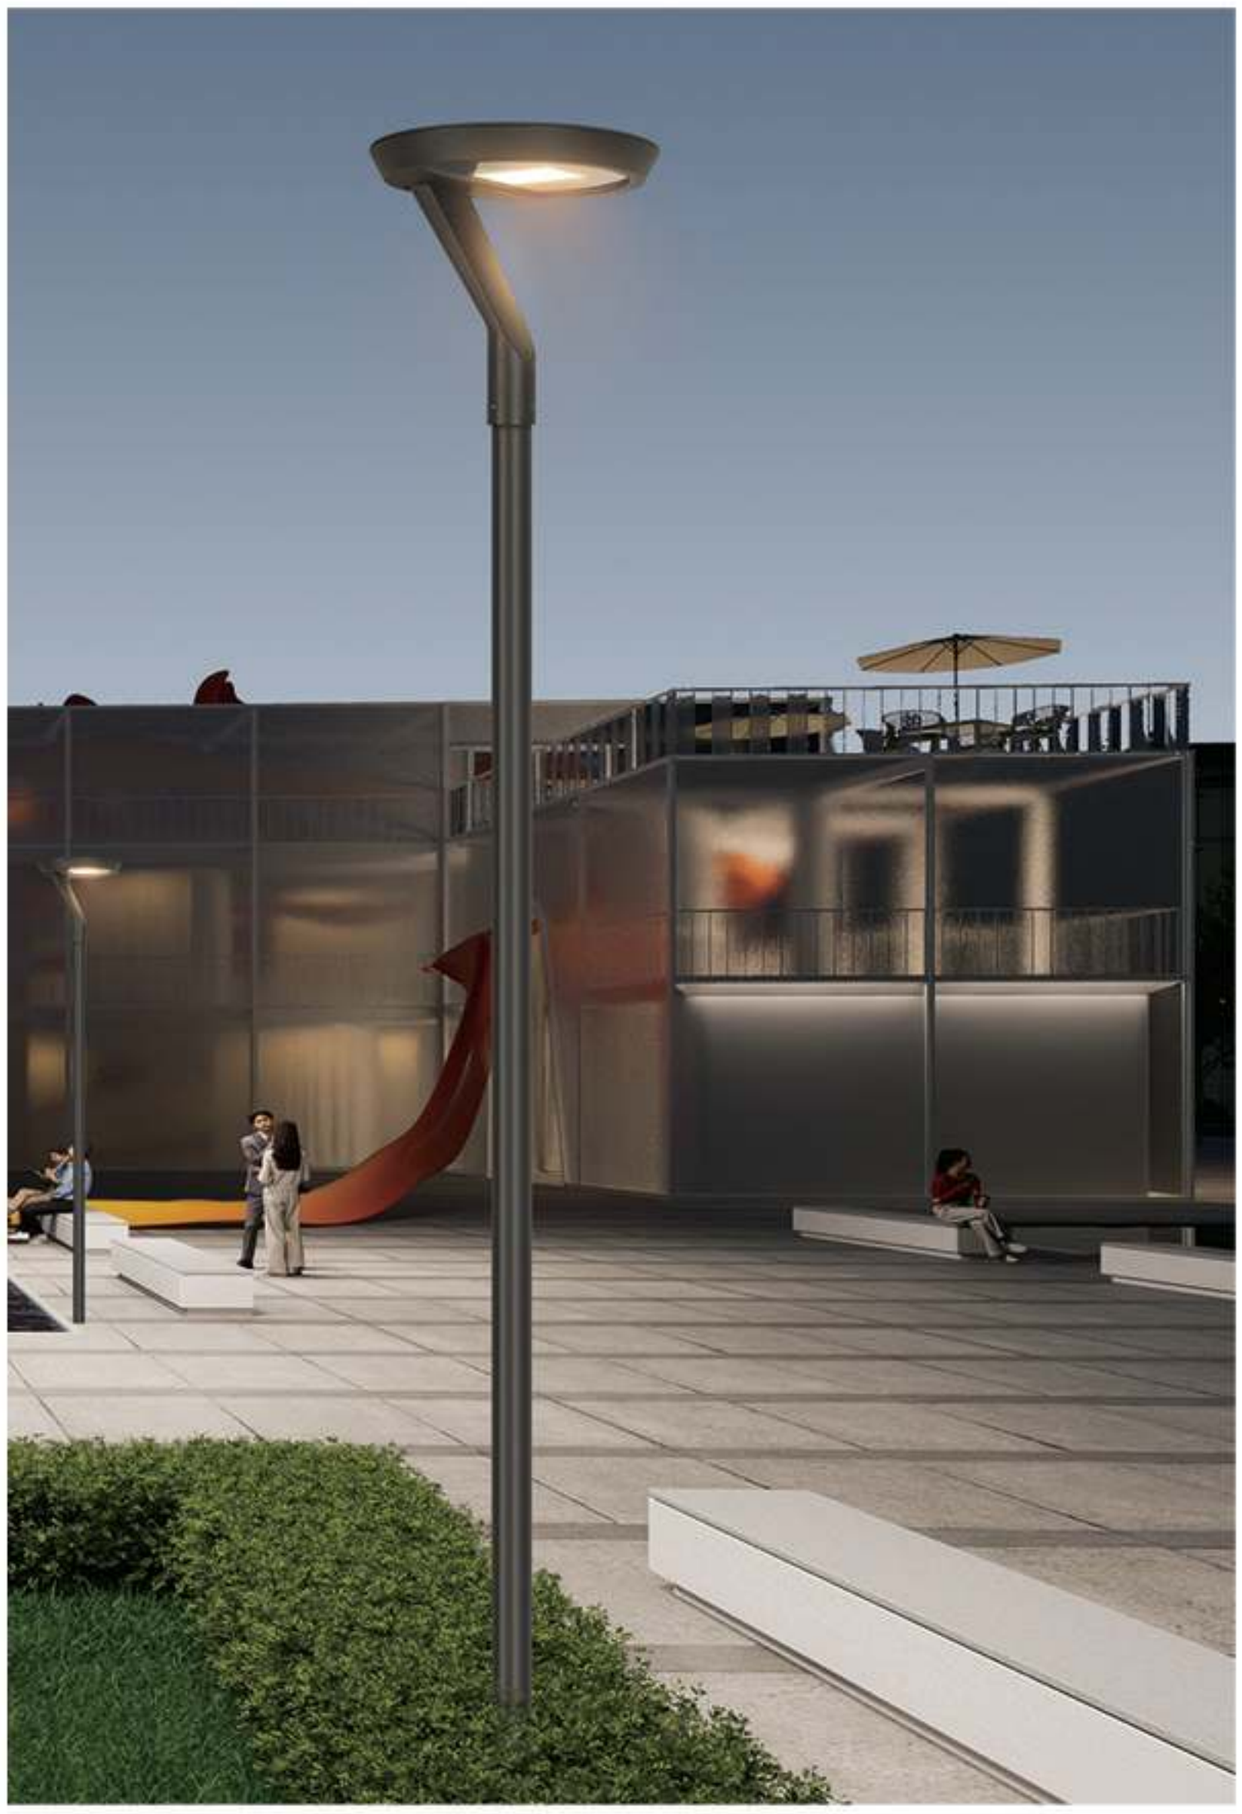

# GRACE

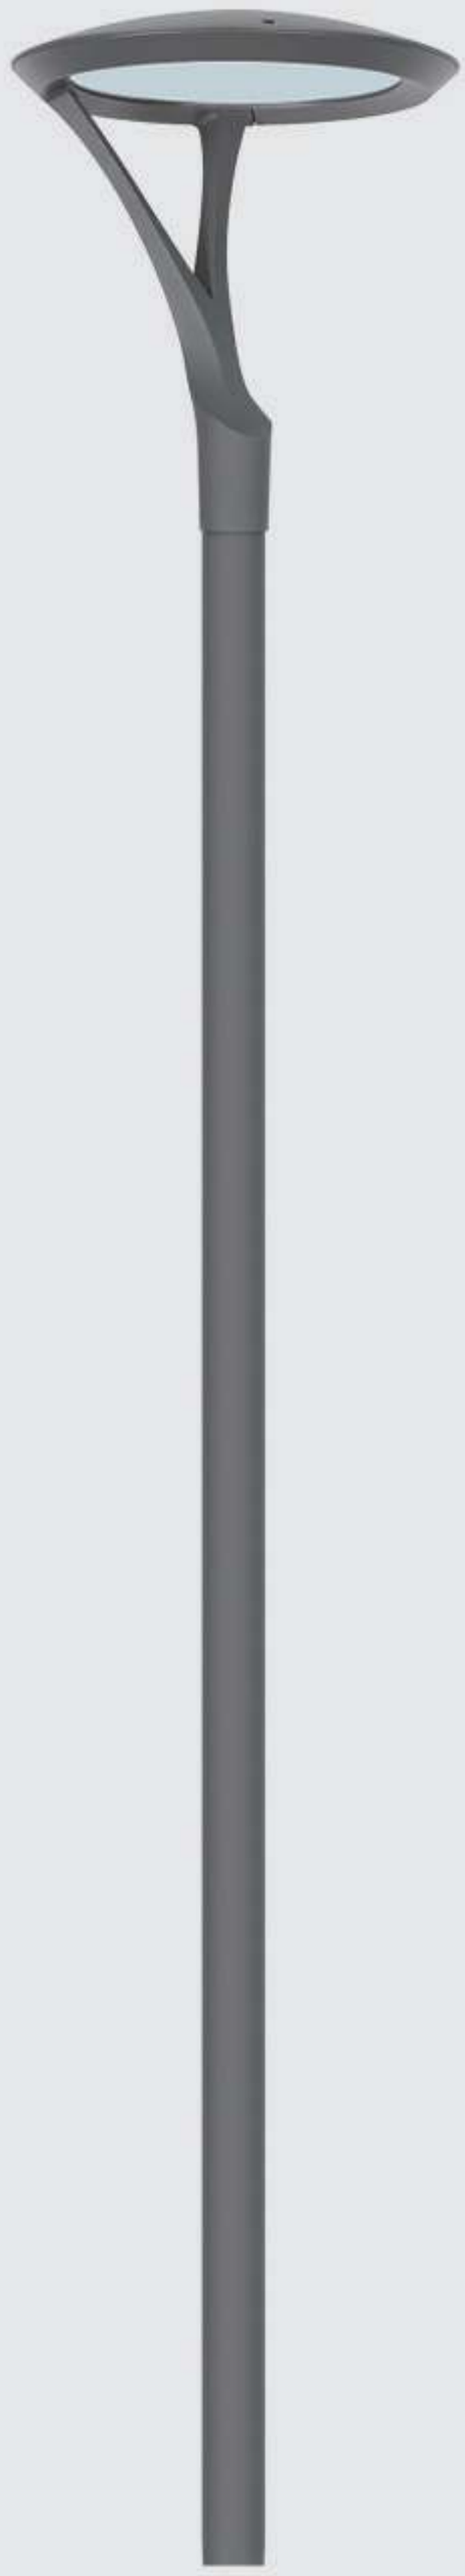

**Product Parameters**


| PRODUCT NAME | GRACE |
|---|---|
| Product Size (mm) | φ598 X H678 |
| Power | 30W / 50W / 70W / 100W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 70° X 150° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC/Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 6 ± 0.5kgs (Hosing) |

## Product Details





## Product Size

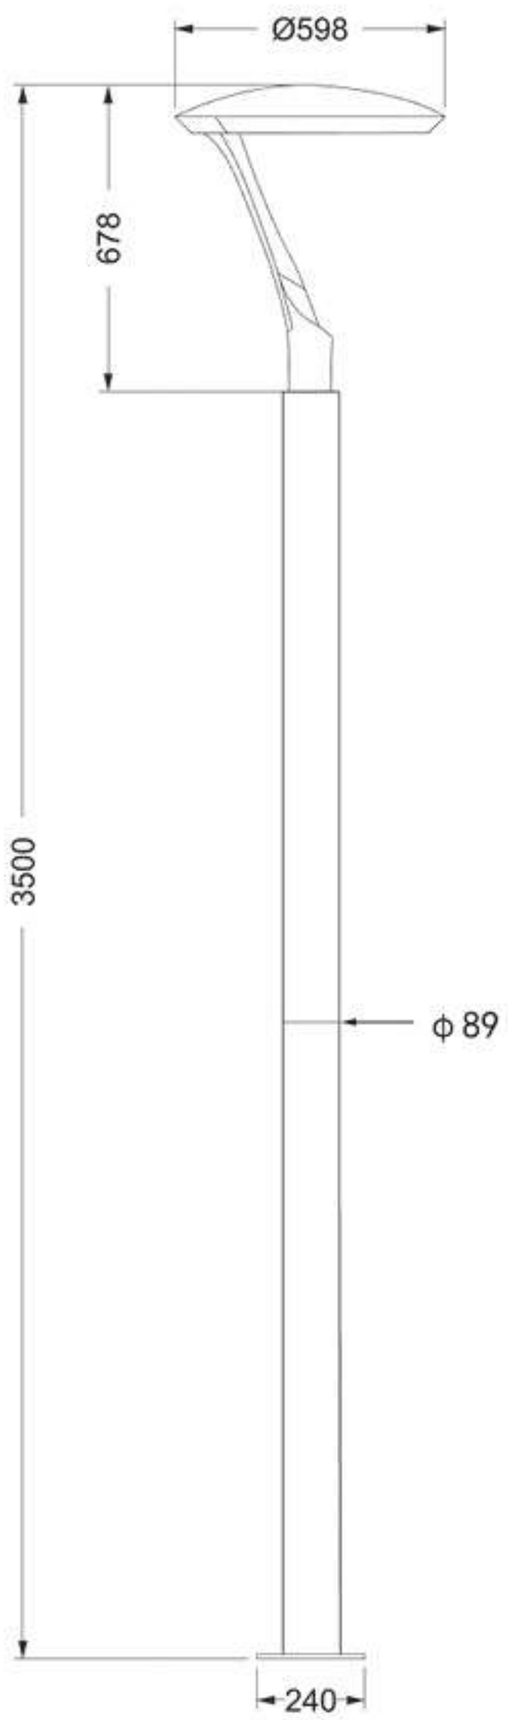



Unit:mm

## Product Rendering



# DEFENDER

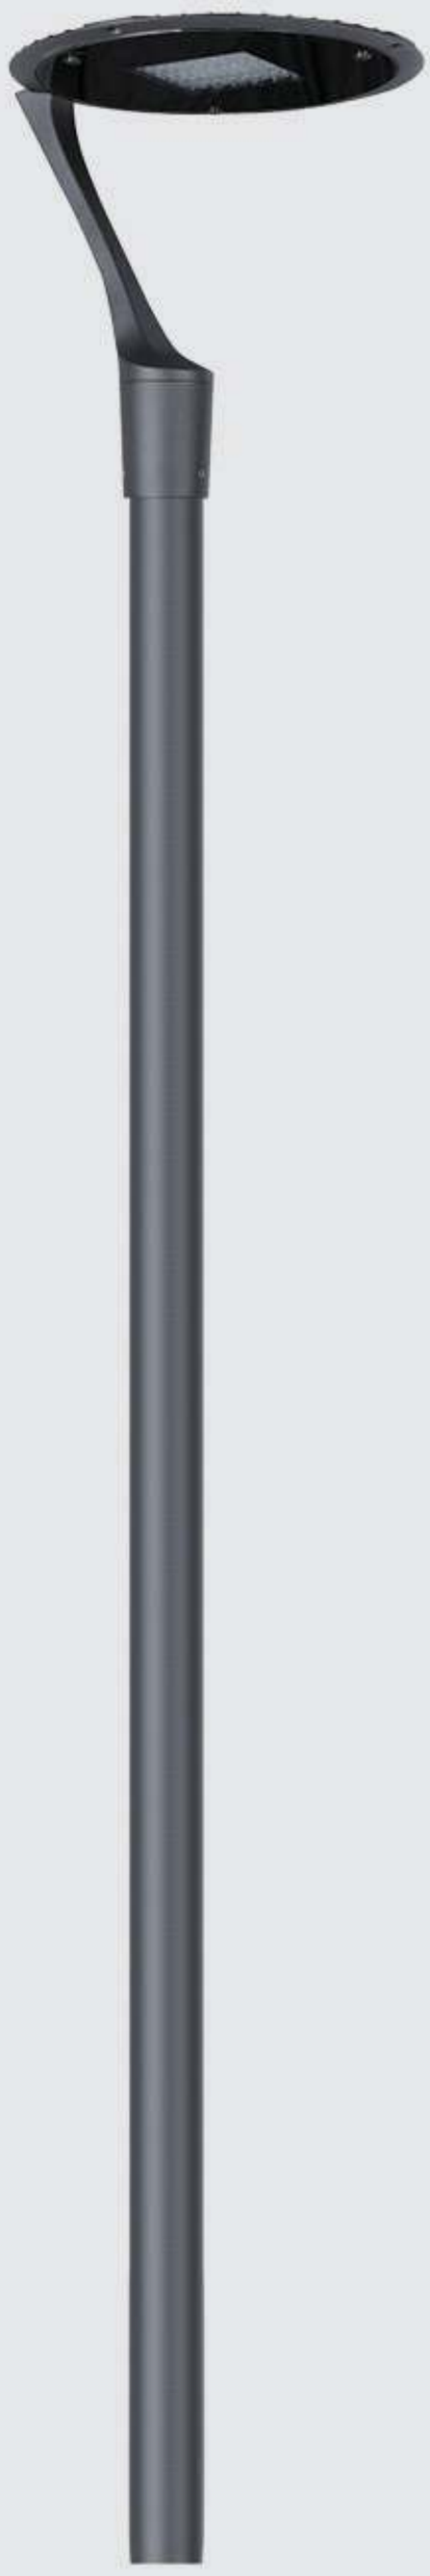

**Product Parameters**


| PRODUCT NAME | DEFENDER |
|---|---|
| Product Size (mm) | φ445 X H480 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3-5m |
| Warranty | 5 Years |
| Net Weight | 5 ± 0.5kgs（Housing） |

## Product Details





## Product Size

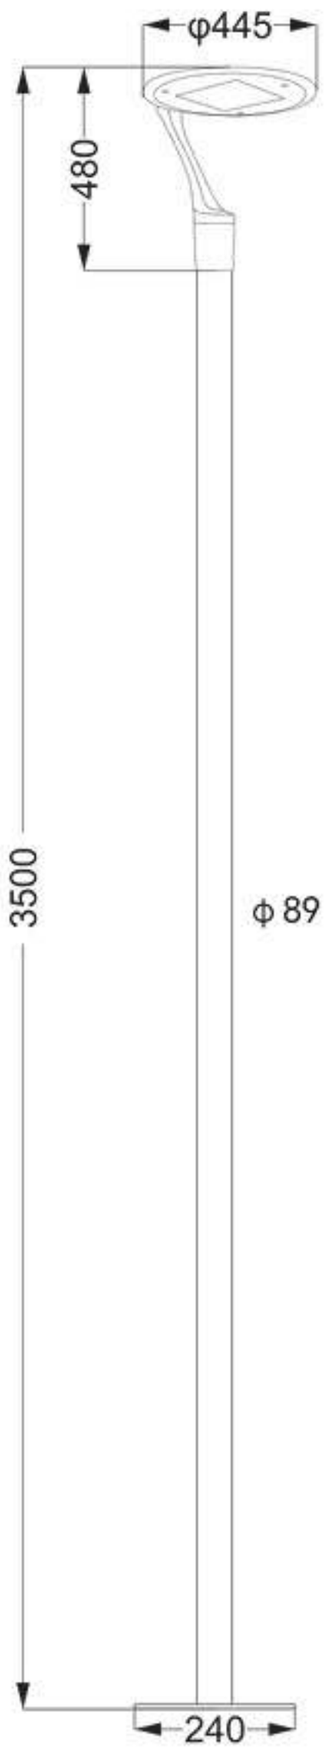


Unit:mm

## Product Rendering



# JAZZ-A



**Product Parameters**


| PRODUCT NAME | JAZZ-A |
|---|---|
| Product Size (mm) | 545 X 545 X 500 |
| Power | 9W / 10W / 15W |
| Efficiency | 135-160lm/W |
| Photovoltaic Panel | 5VX40W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Product Details





## Product Size

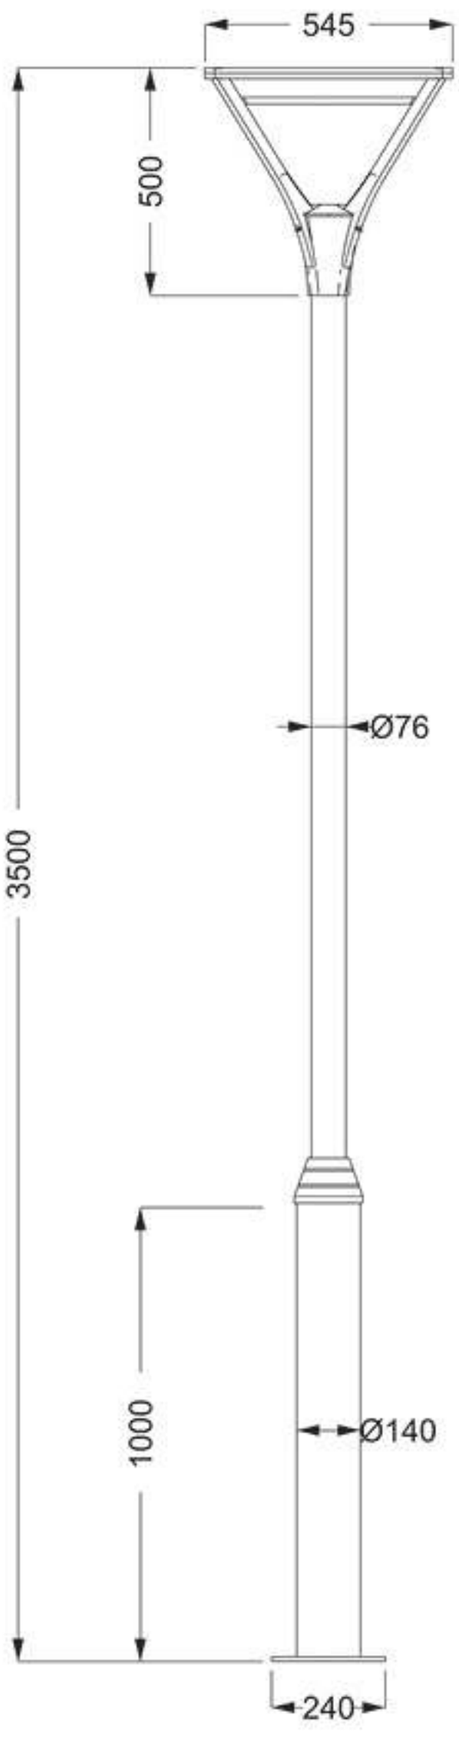



Unit:mm

## Product Rendering



# JAZZ-B/C

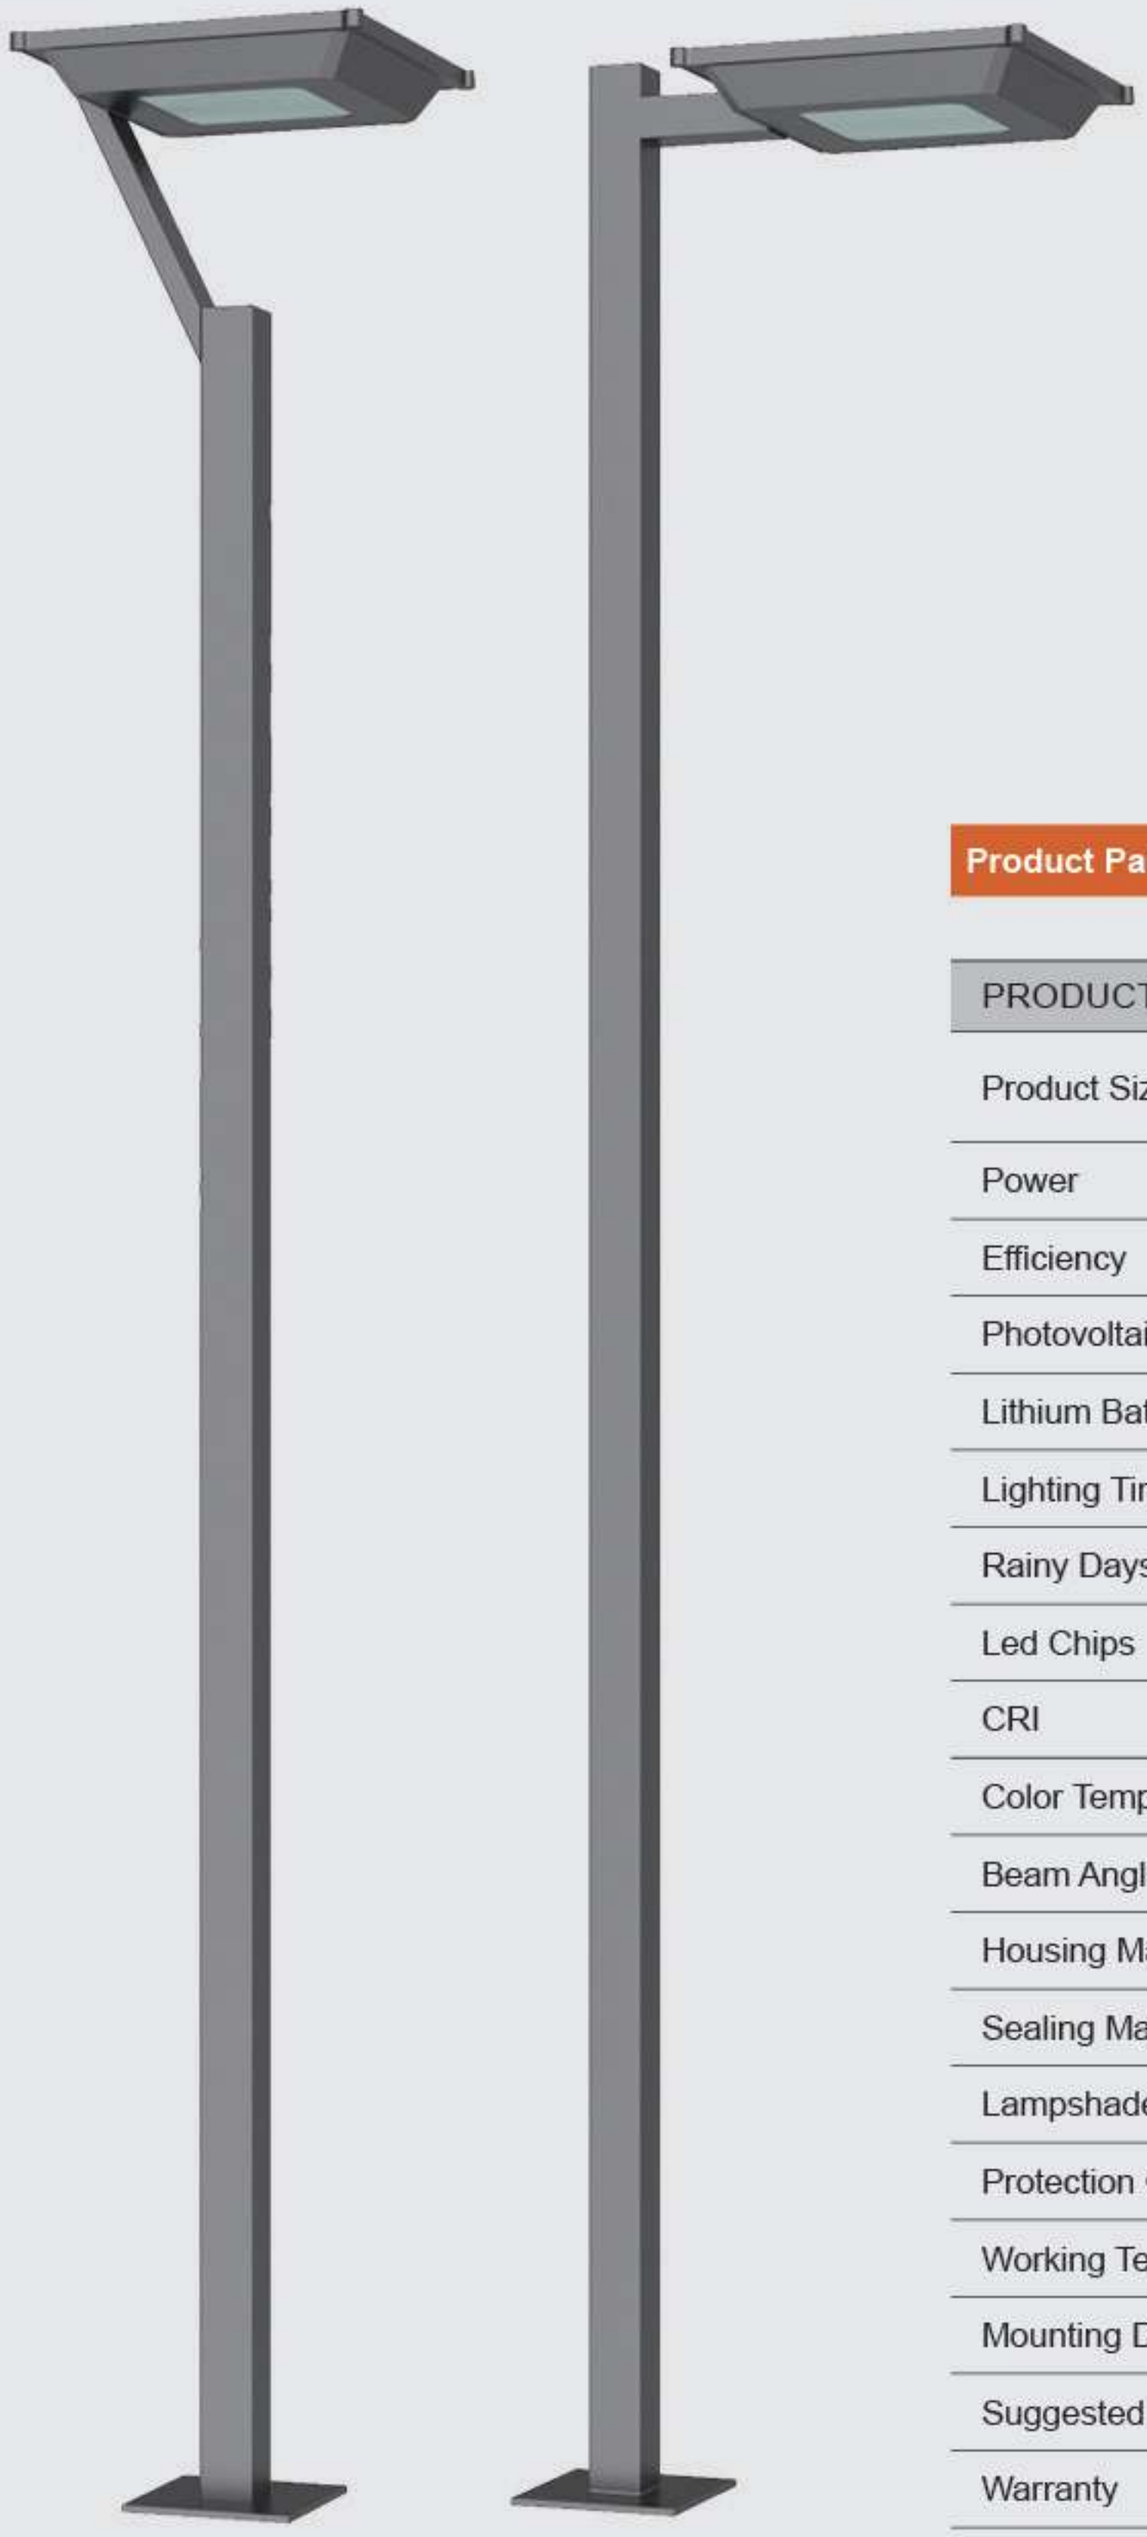

## Product Parameters


| PRODUCT NAME | JAZZ B/C |
|---|---|
| Product Size (mm) | A: 540 X 540 X 500<br>B: 540 X 540 X 60 |
| Power | 10-15W |
| Efficiency | 100-160lm/W |
| Photovoltaic Panel | 5VX45W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 80 X 80mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Product Details





## Product Size

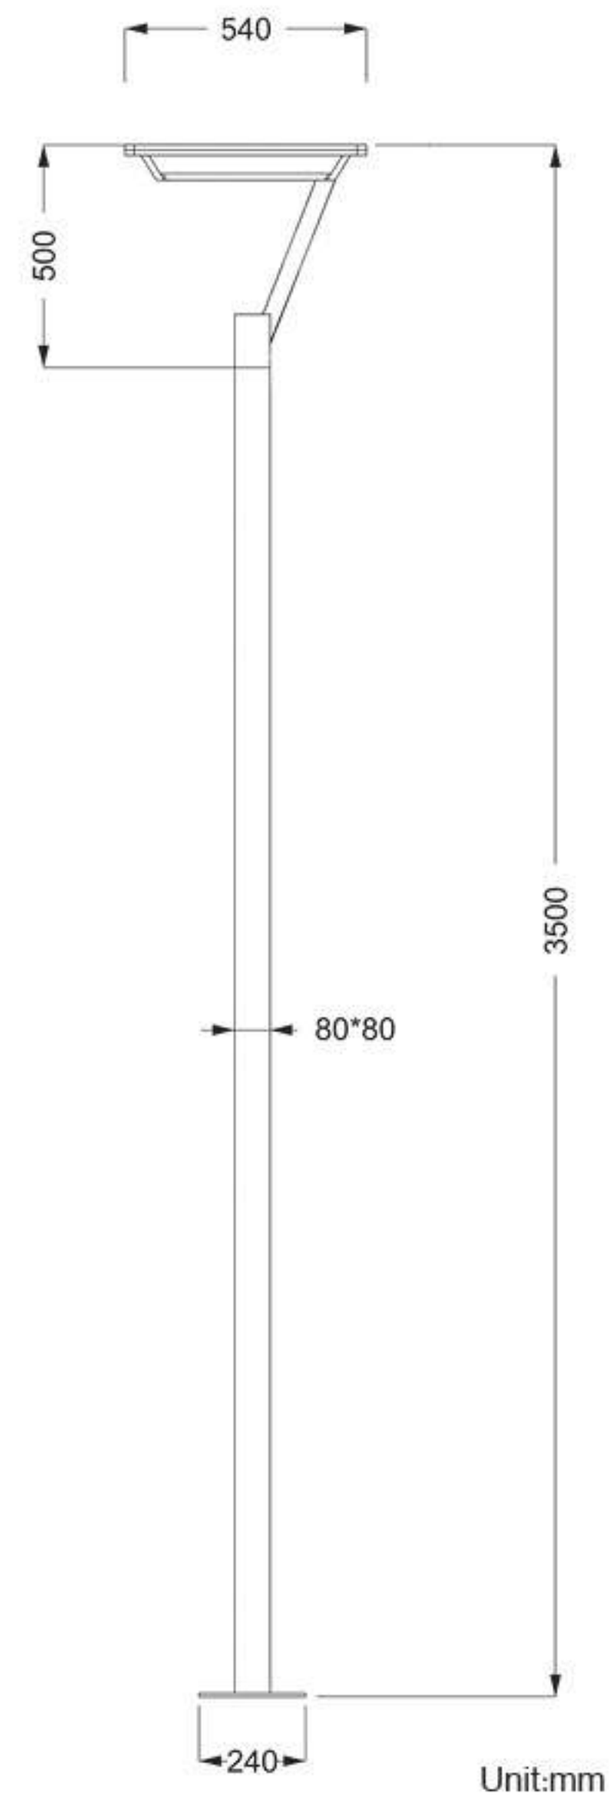


## Product Rendering



# FULEE



## Product Parameters


| PRODUCT NAME | FULEE |
|---|---|
| Product Size (mm) | 510 X 510 X 465 |
| Power | 9W-12W-15W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 5V X 40W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Product Details





## Product Size

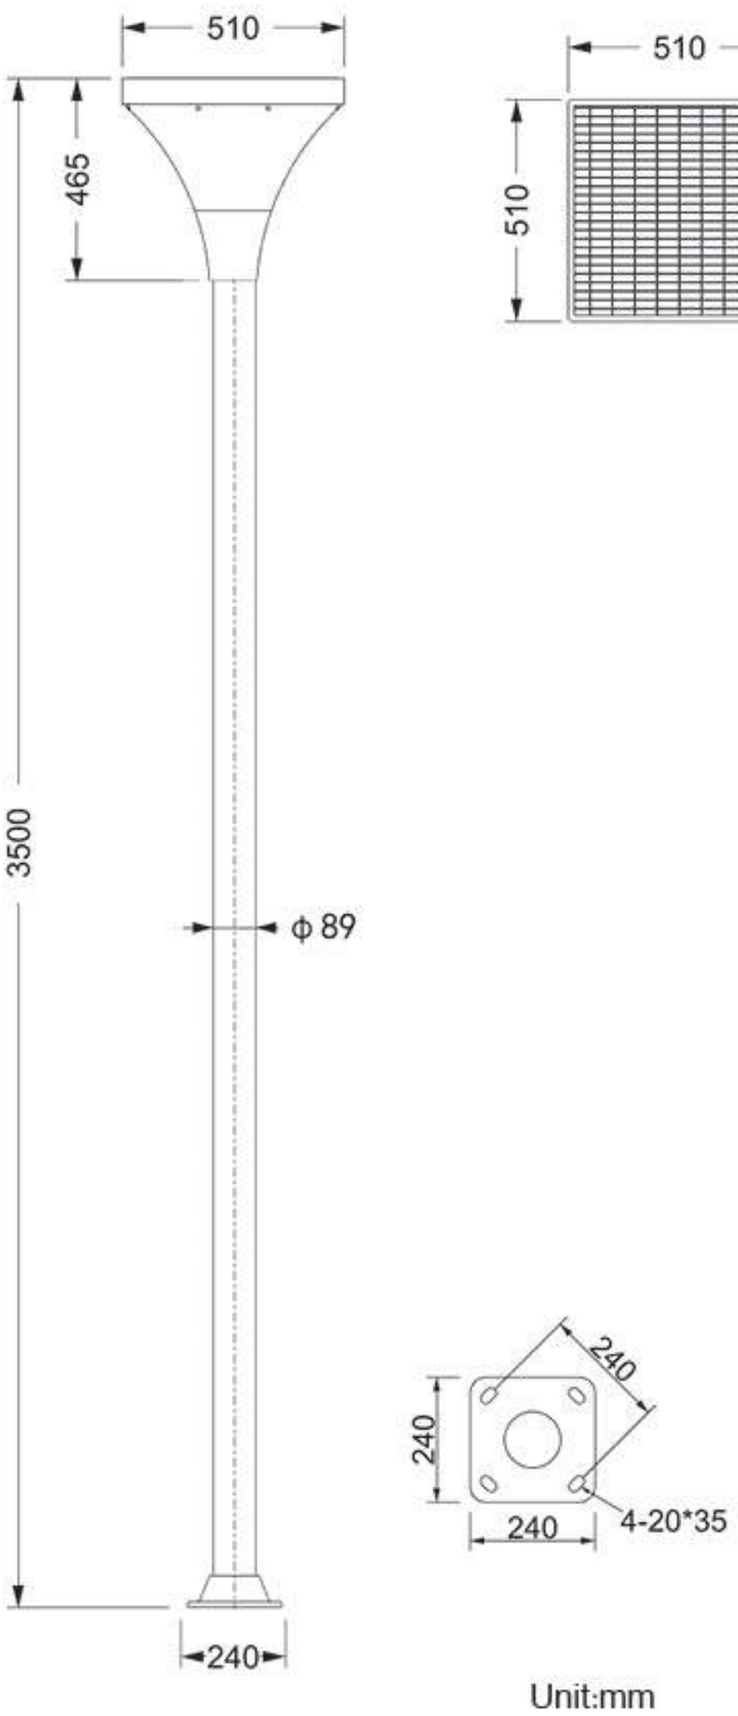








Unit:mm

## Product Rendering




# AURORA



## Product Details




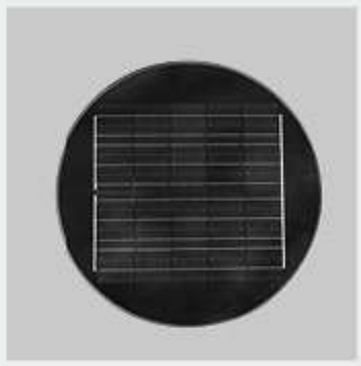


## Product Parameters

| PRODUCT NAME | AURORA |
|---|---|
| Product Size (mm) | φ550 X H300 |
| Power | 12-15W |
| Efficiency | 150lm/W |
| Photovoltaic Panel | 5V X 30W |
| Lithium Battery | 30AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 60mm / 76mm |
| Suggested Mounting Height | 3-3.5m |
| Warranty | 3 Years |
| Net Weight | 7.5 ± 0.5 kgs |

## Light Distribution Curve

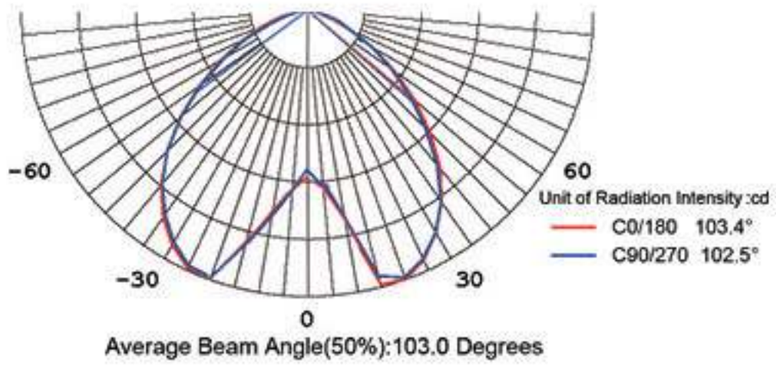


## Product Size

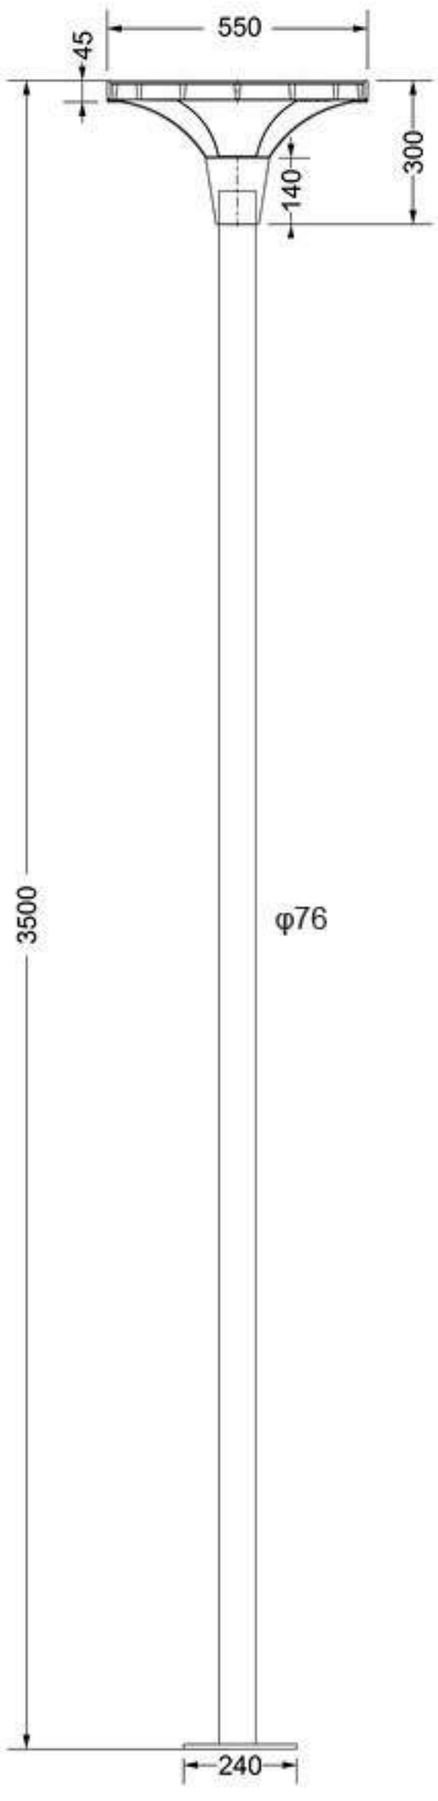



Unit:mm

## Product Rendering



# GAVIN

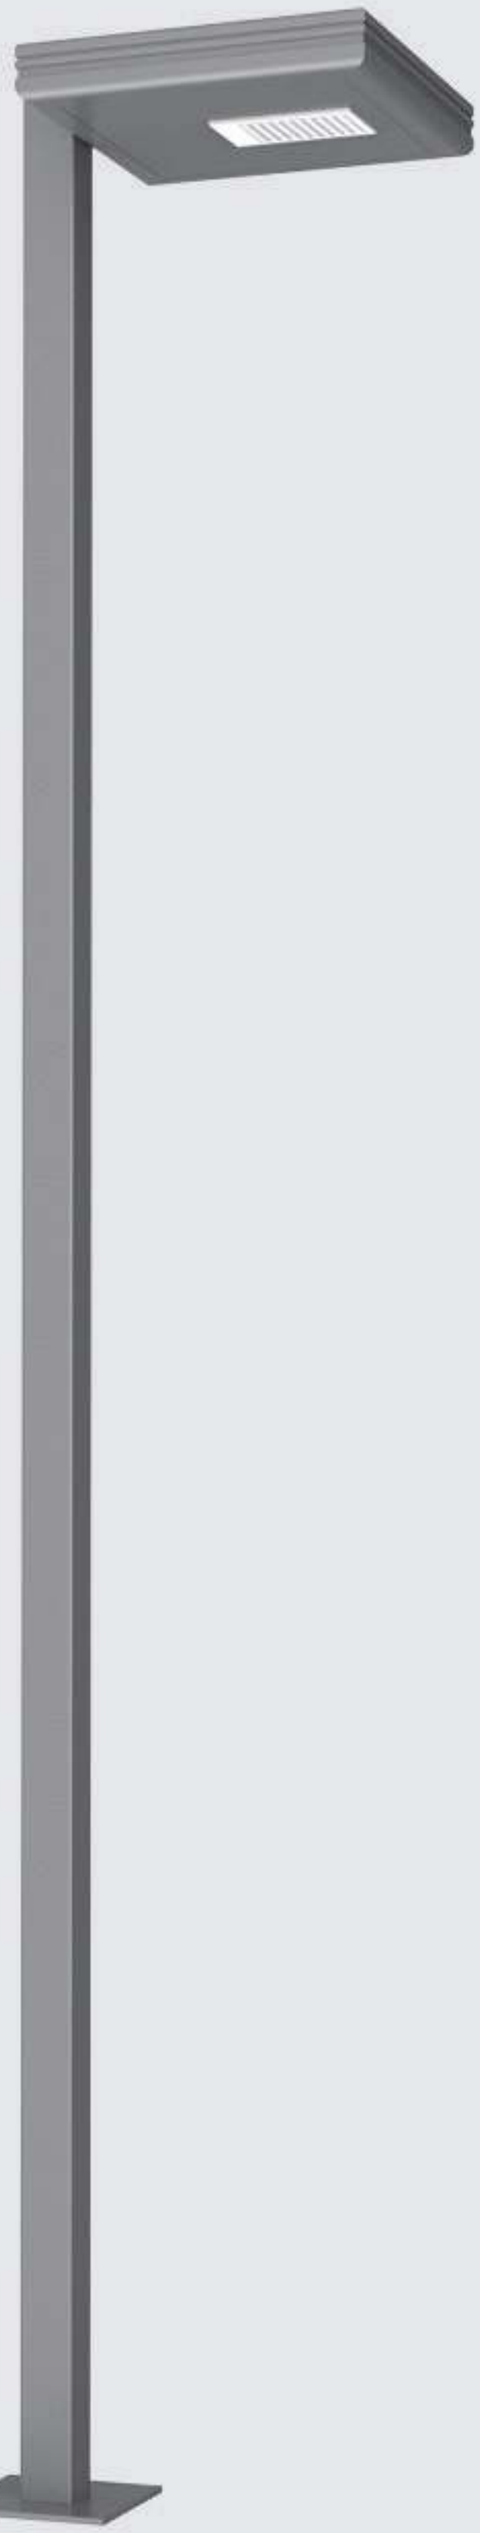

## Product Details







## Product Parameters

| PRODUCT NAME | GAVIN |
|---|---|
| Product Size (mm) | 520 X 520 X 60 |
| Power | 10-15W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 5V X 40W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Light Distribution Curve

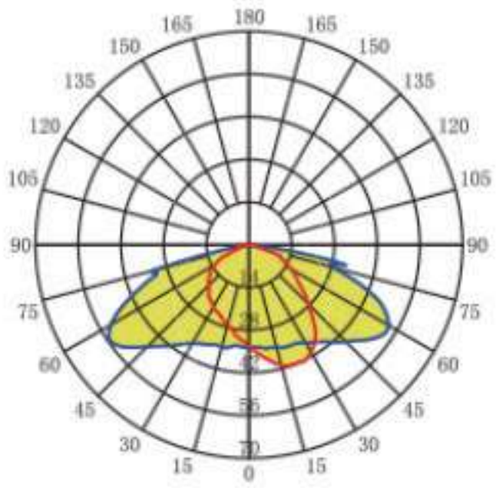


## Product Size

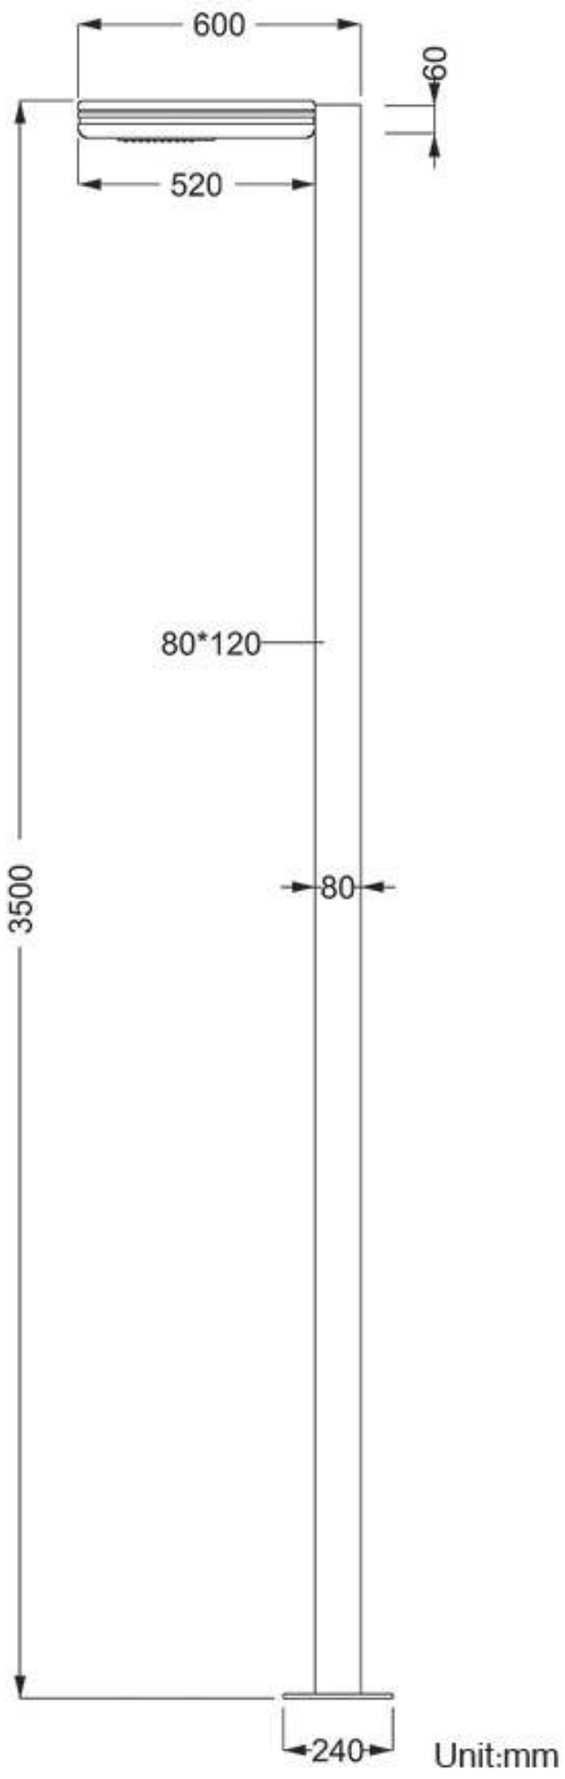


Unit:mm

## Product Rendering




# YT-007



## Product Parameters


| PRODUCT NAME | YT-007 |
|---|---|
| Product Size (mm) | φ450 X H600 |
| Power | 10W-12W-15W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 5V X 20W |
| Lithium Battery | 20AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Product Details

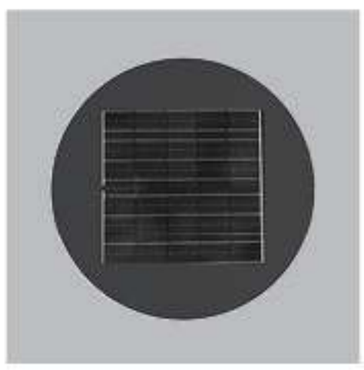



## Product Size

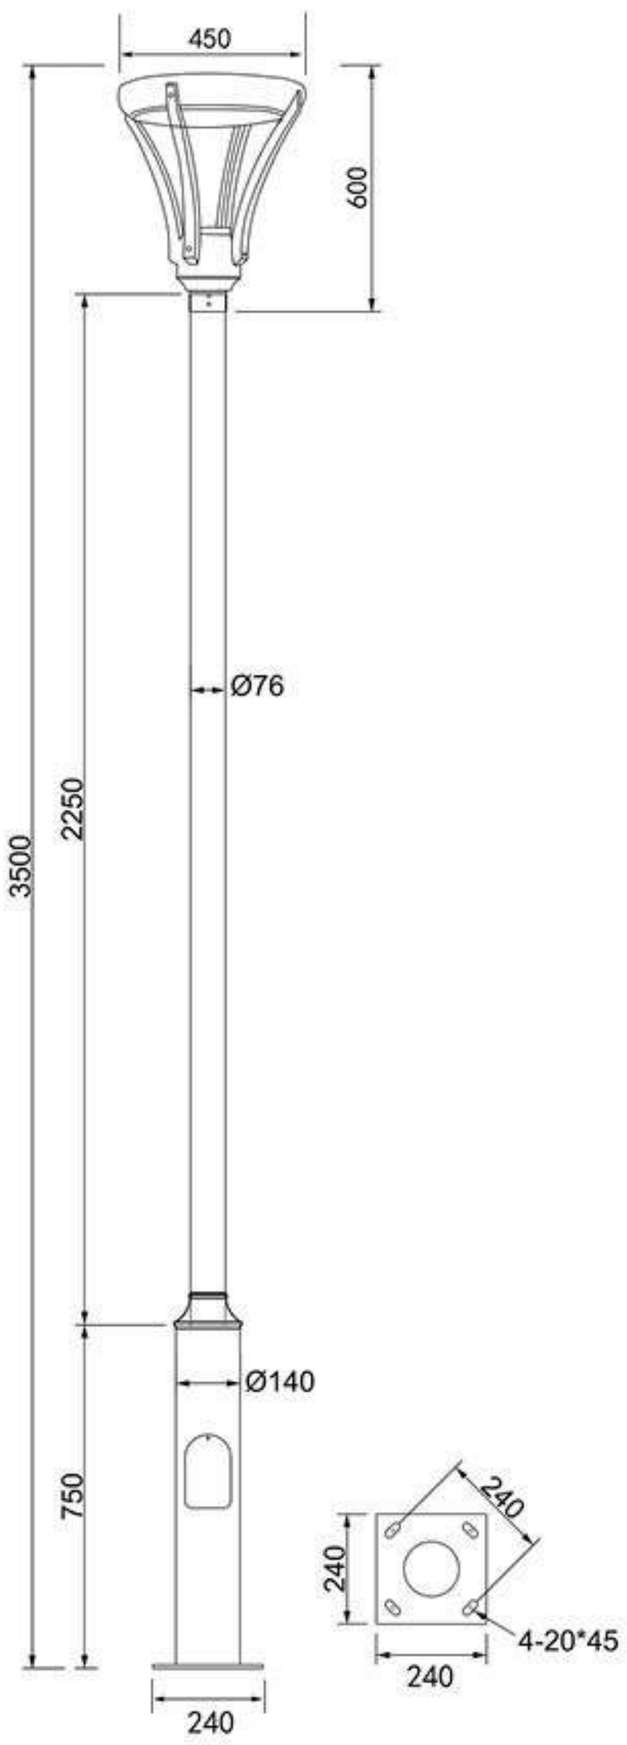


Unit:mm

## Product Rendering



# SUN-SOLAR



## Product Parameters


| PRODUCT NAME | SUN-SOLAR |
|---|---|
| Product Size (mm) | φ500 X H680 |
| Power | 10W-12W-15W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 6V X 20W |
| Lithium Battery | 20AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |
| Net Weight (Light head weight) | 6.3 ± 0.5kgs |

## Product Details





## Product Size

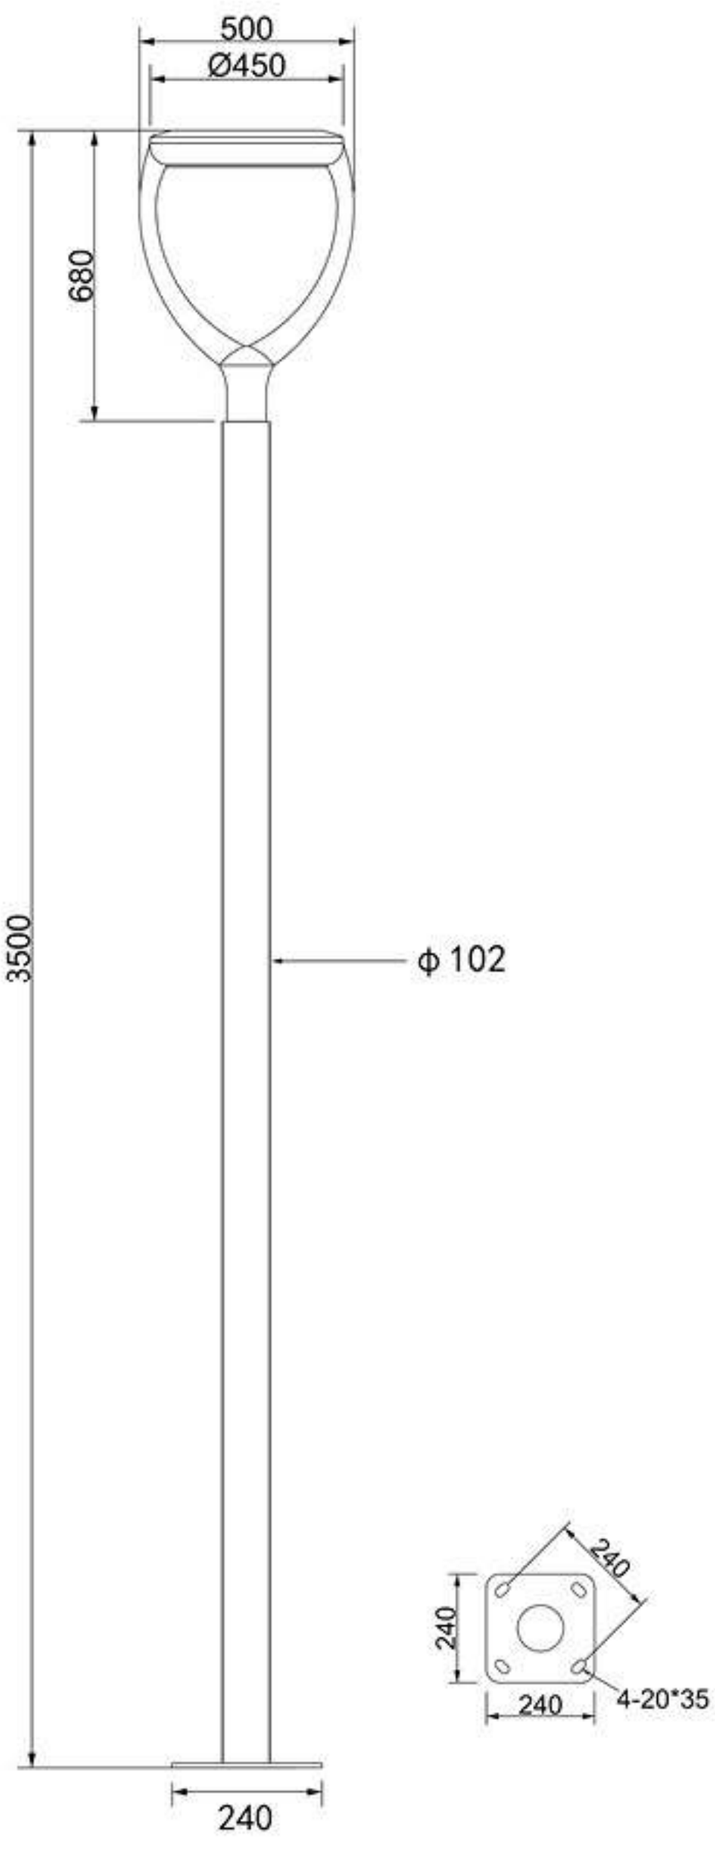







## Product Rendering



# WISE

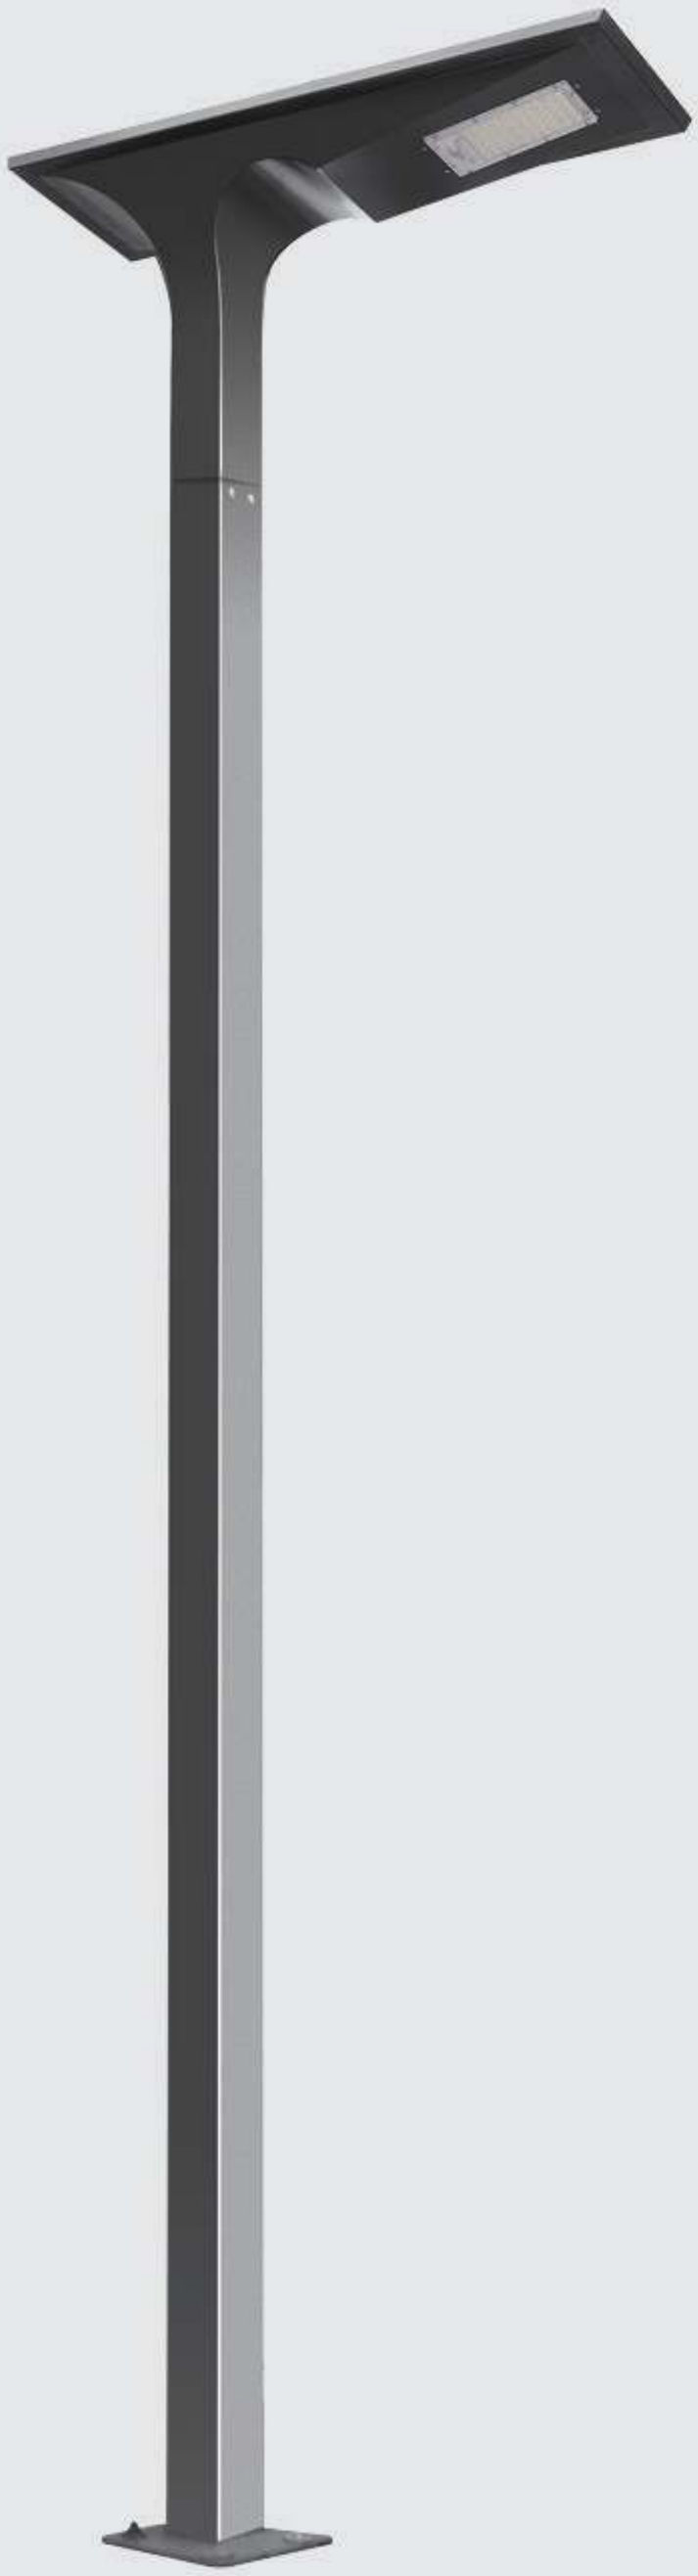

## Product Details

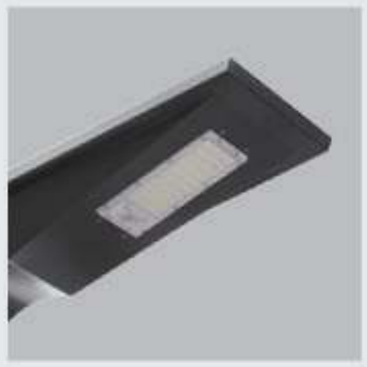





## Product Parameters

| PRODUCT NAME | WISE |
|---|---|
| Product Size (mm) | 900 X 350 X 280 |
| Power | 15-20W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 5V X 60W |
| Lithium Battery | 50AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Light Distribution Curve

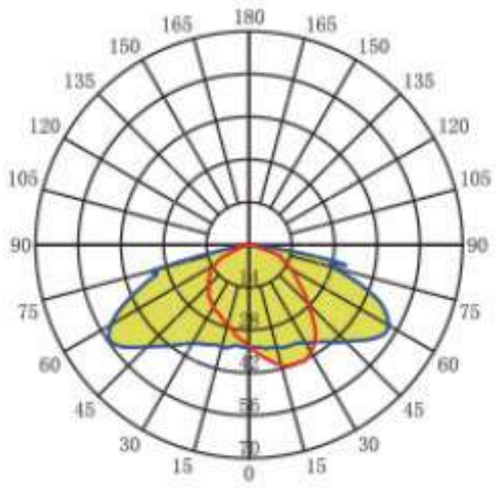


## Product Size

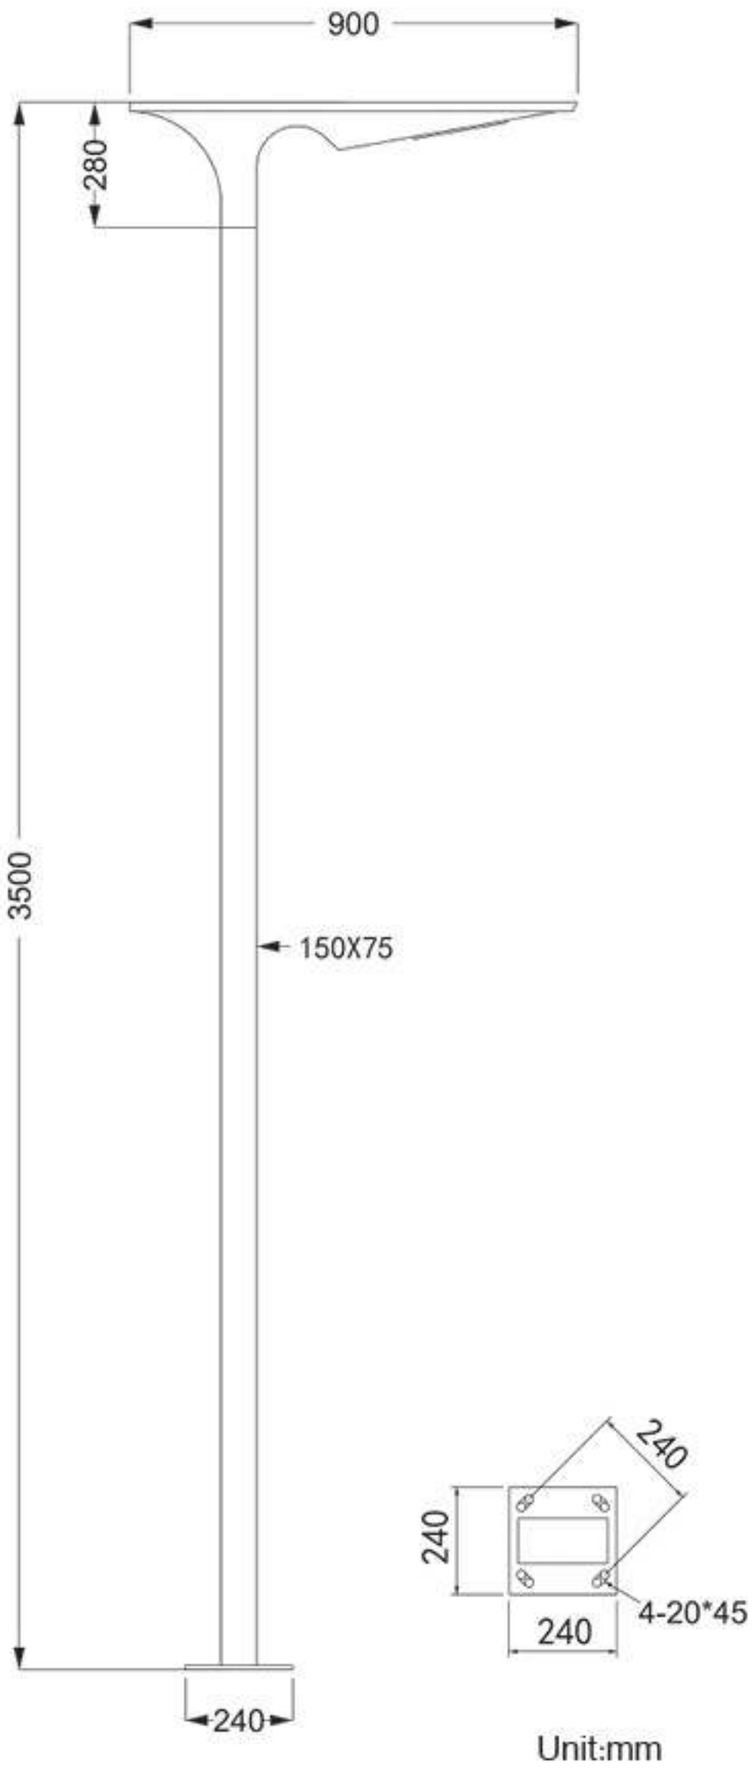



Unit:mm

## Product Rendering



# STAR

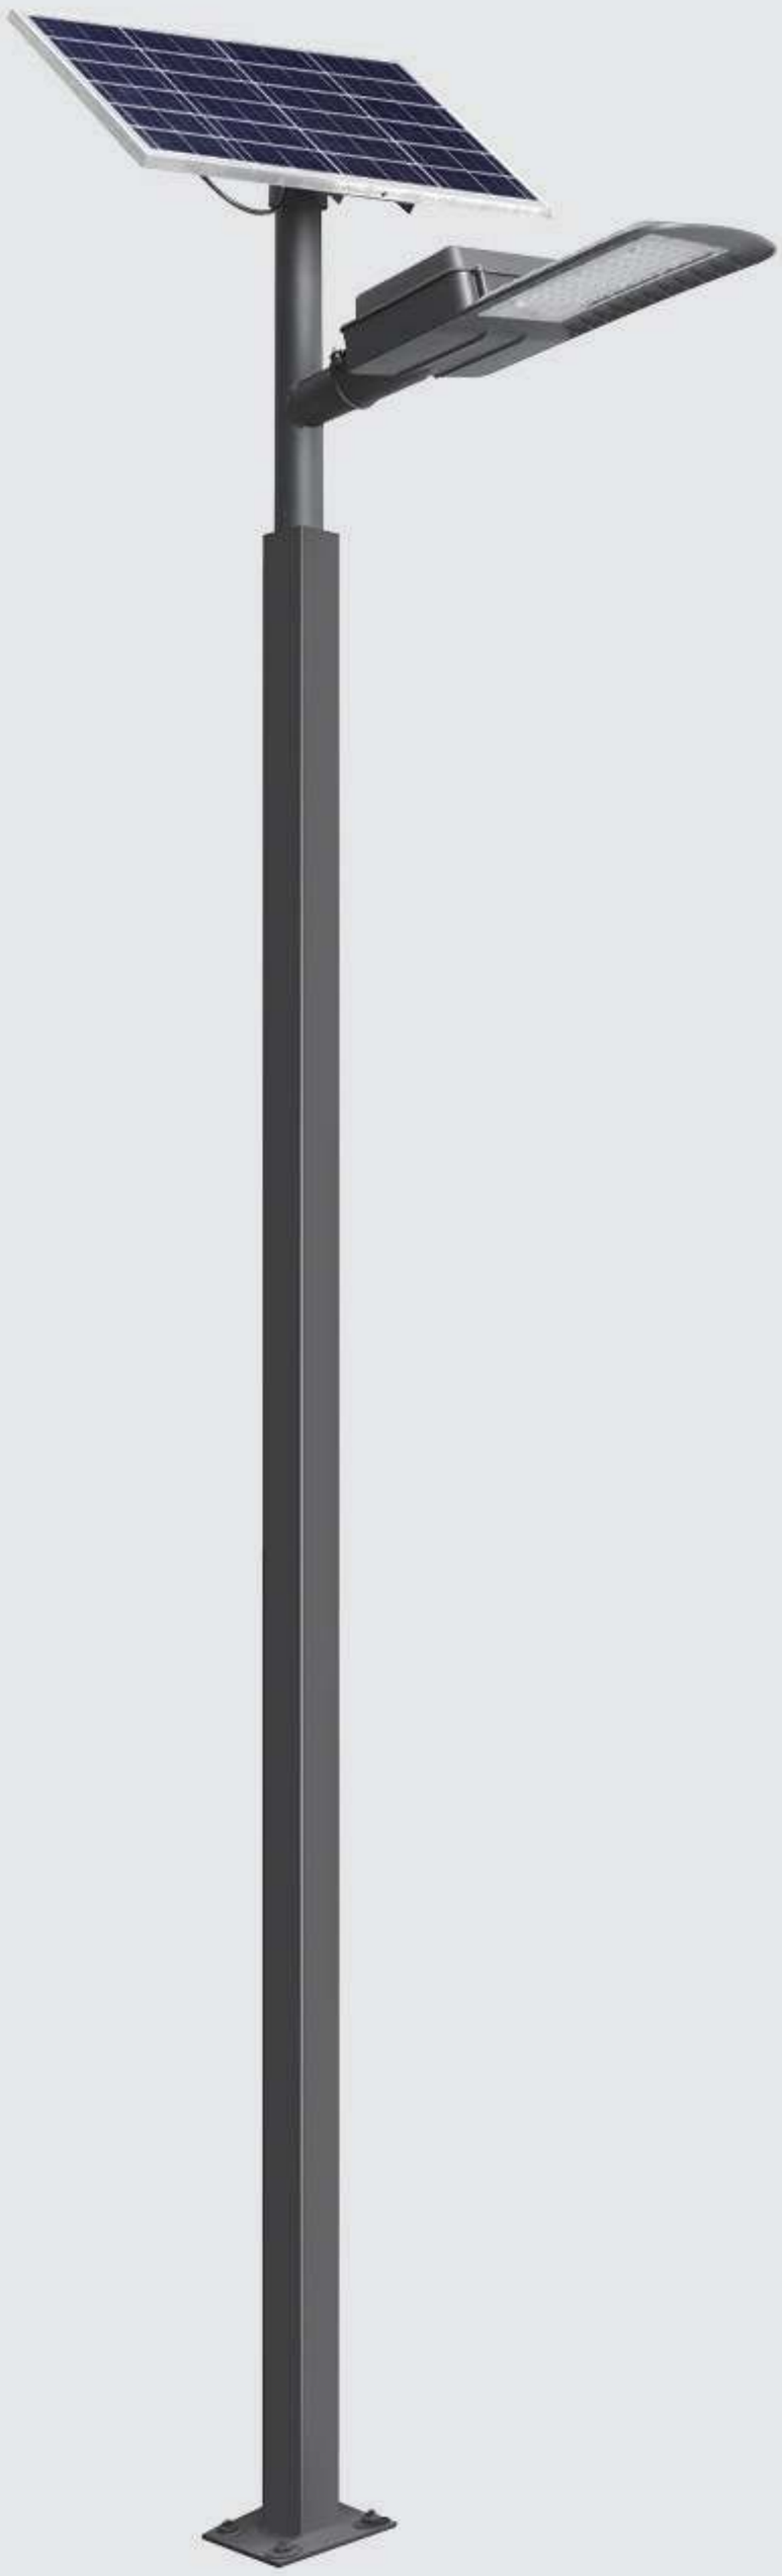

## Product Details









## Product Parameters

| PRODUCT NAME | STAR |
|---|---|
| Product Size (mm) | L820 X H500 |
| Power | 12W / 30W |
| Efficiency | 150-160lm/W |
| Photovoltaic Panel | 5V X 30W / 40W / 50W / 60W |
| Lithium Battery | 30AH / 40AH / 50AH / 60AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 80 X 80mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |

## Light Distribution Curve

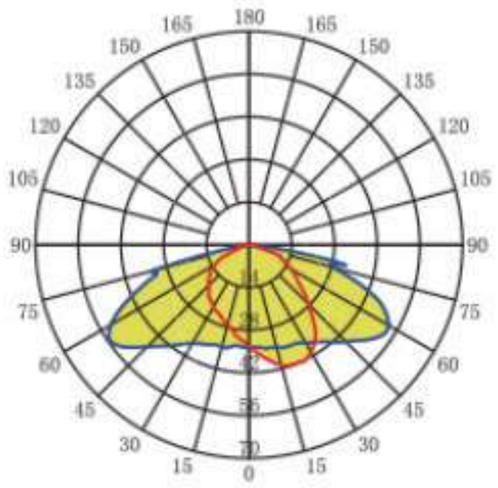


## Product Size

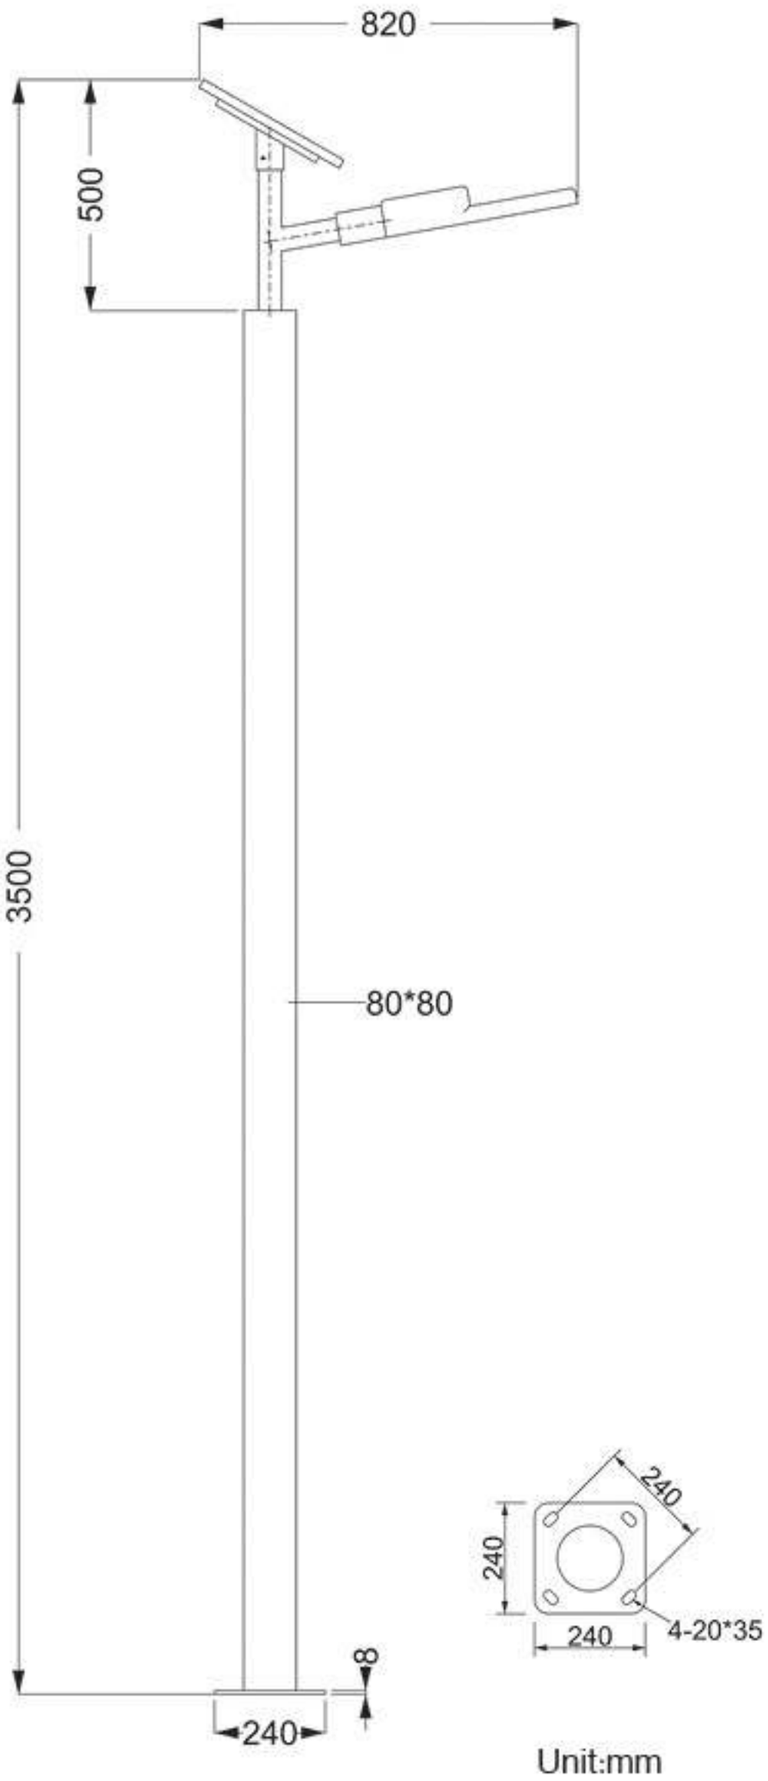



Unit:mm

## Product Rendering



# JAZZ-A

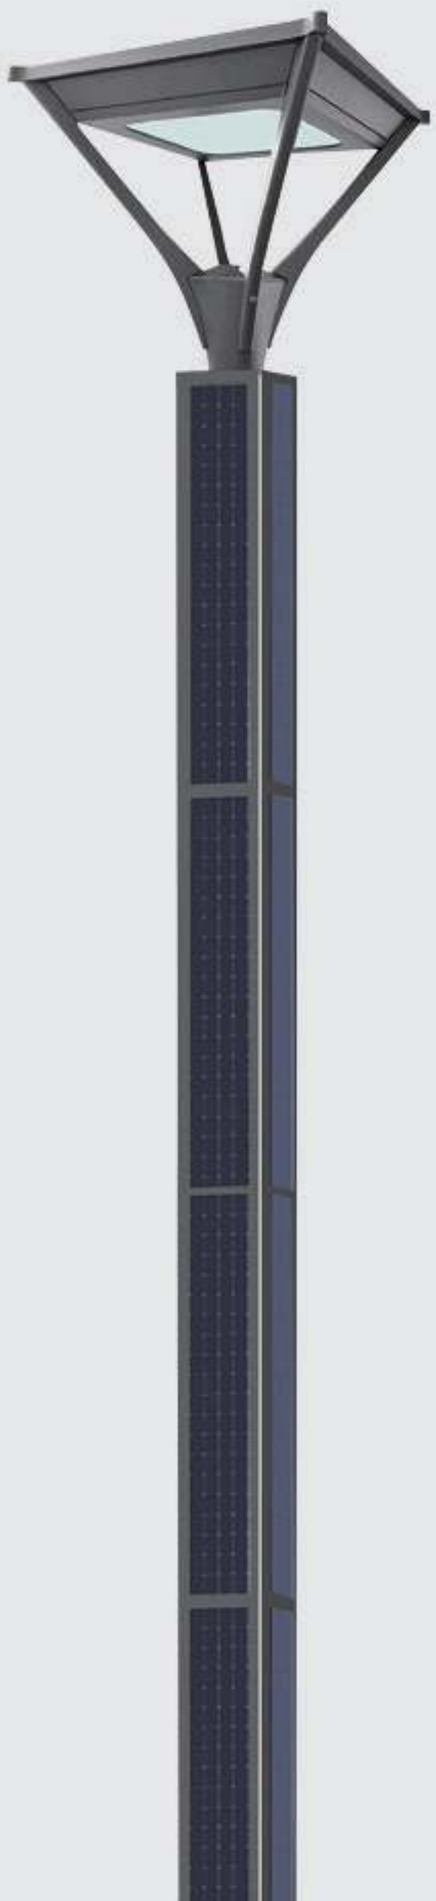


**Product Parameters**

| PRODUCT NAME | JAZZ-A |
|---|---|
| Product Size (mm) | 545 X 545 X 500 |
| Power | 15W-30W |
| Efficiency | 135-160lm/W |
| Photovoltaic Panel | 12V X 80W |
| Lithium Battery | 80AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |



# ROMANCE



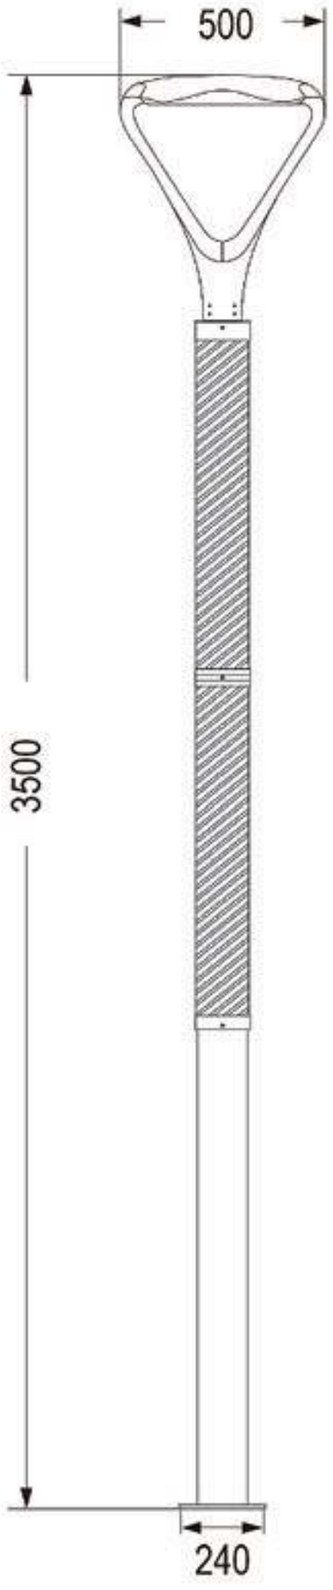


**Product Parameters**

| PRODUCT NAME | ROMANCE |
|---|---|
| Product Size (mm) | φ500 X 3500 |
| Power | 15W-30W |
| Efficiency | 100-160lm/W |
| Photovoltaic Panel | 12V X 45W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 3 Years |





KALE



GOLF

## Product Parameters

| PRODUCT NAME | KALE/GOLF |
|---|---|
| Product Size (mm) | φ560 X 400 / 635 X 400 X 500 |
| Power | 12W-20W |
| Efficiency | 100-160lm/W |
| Photovoltaic Panel | 12V X 45W |
| Lithium Battery | 40AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| CRI | ≥70Ra |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC / PMMA |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Mounting Diameter | 76mm |
| Suggested Mounting Height | 3.5m |
| Warranty | 5 Years |



## Pathway Light



YT-2231



YT-2237



YT-2216



YT-2242



YT-2225



YT-2222



YT-2206




YT-2210



YT-2212

# PHAETON-A/B

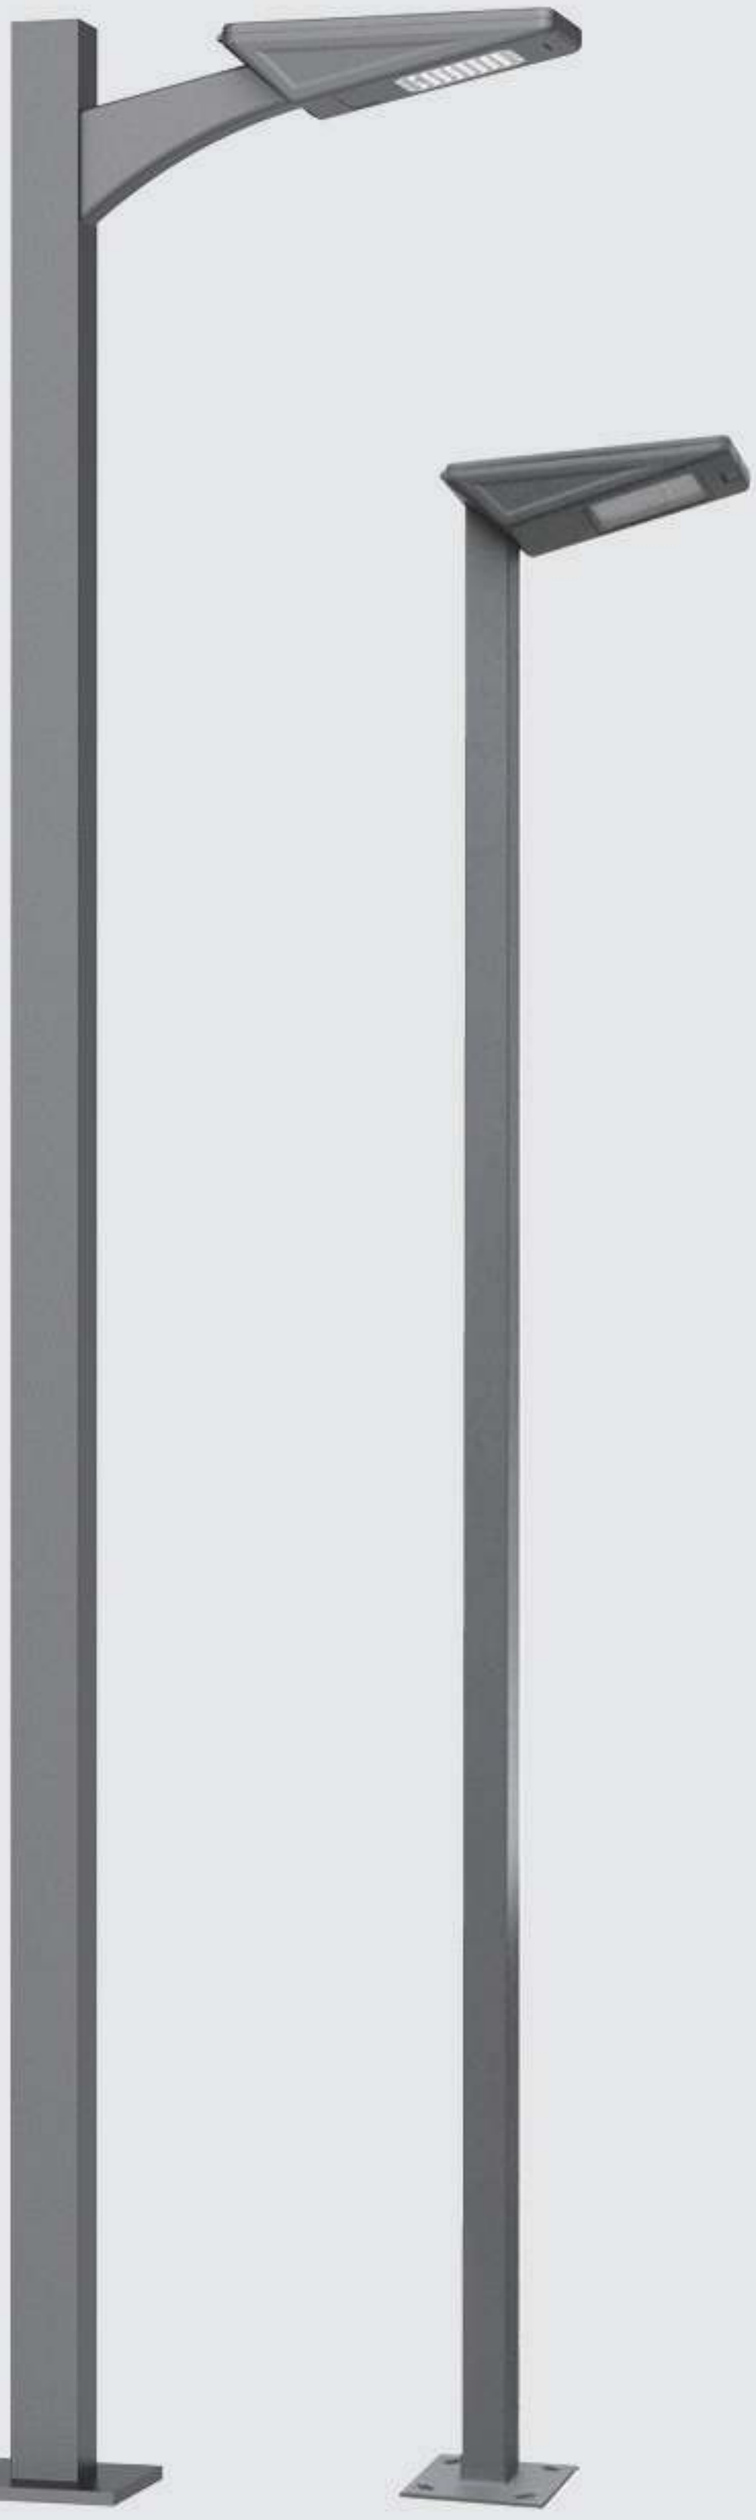

## Product Details







## Product Parameters

| PRODUCT NAME | PHAETON-A/B |
|---|---|
| Product Size (mm) | A: 700 X 220 X 300<br>B: 500 X 220 X 160 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 70° X 150° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3-6m |
| Warranty | 5 Years |
| Net Weight | 5 ± 0.5kgs |

## Light Distribution Curve

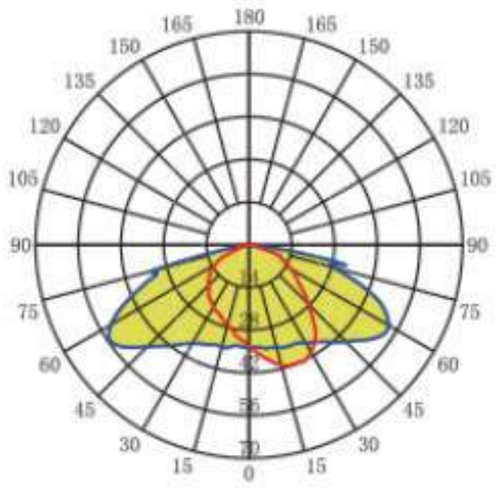


## Product Size

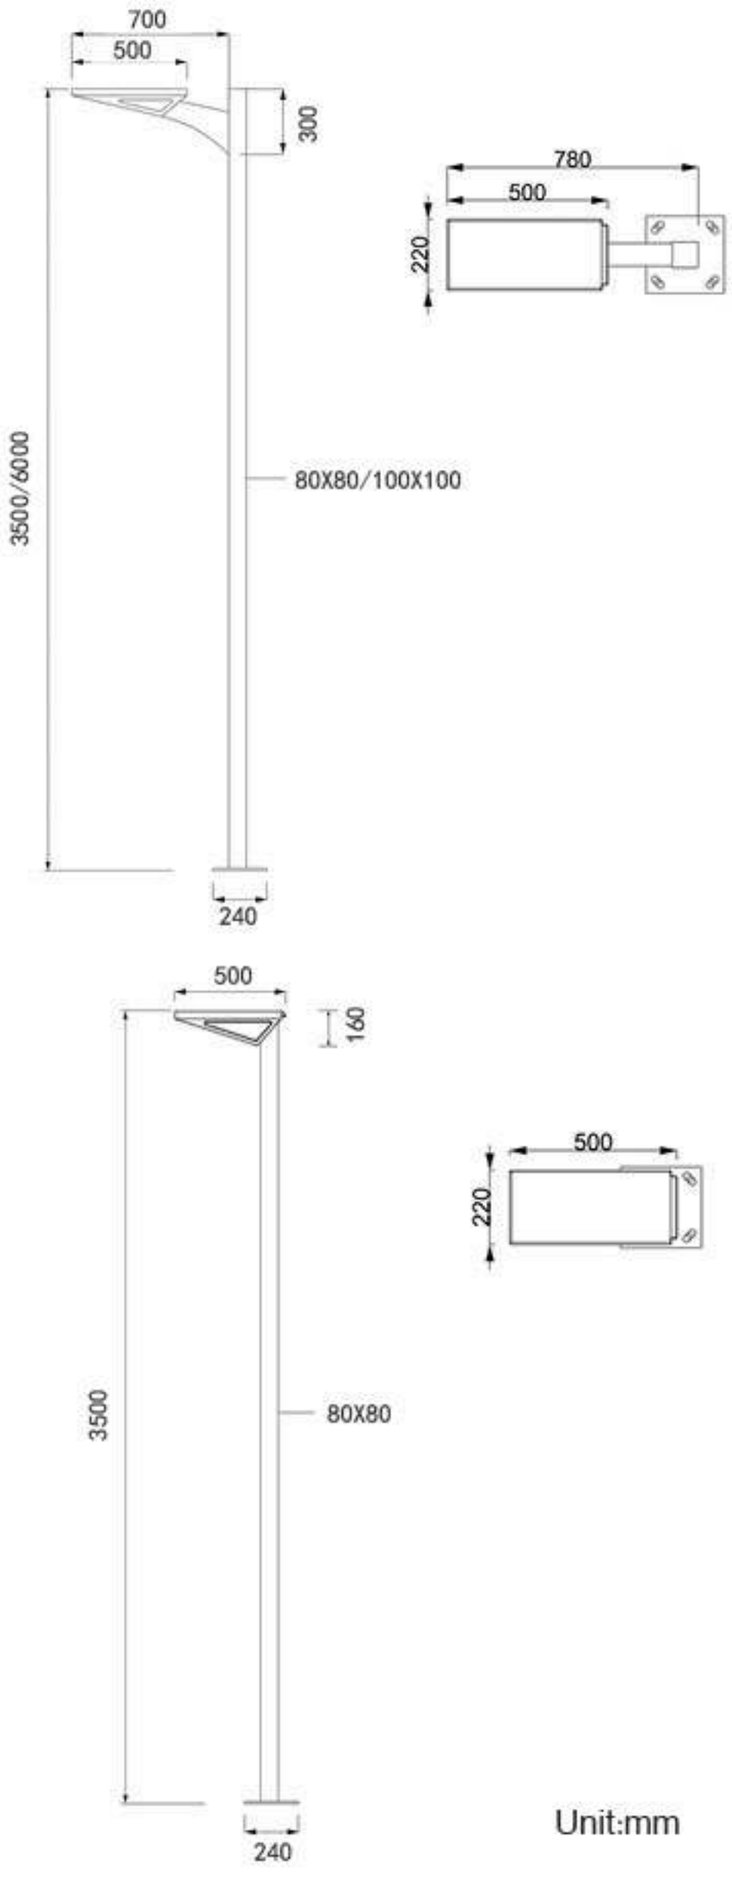



Unit:mm

## Product Rendering



# JANE

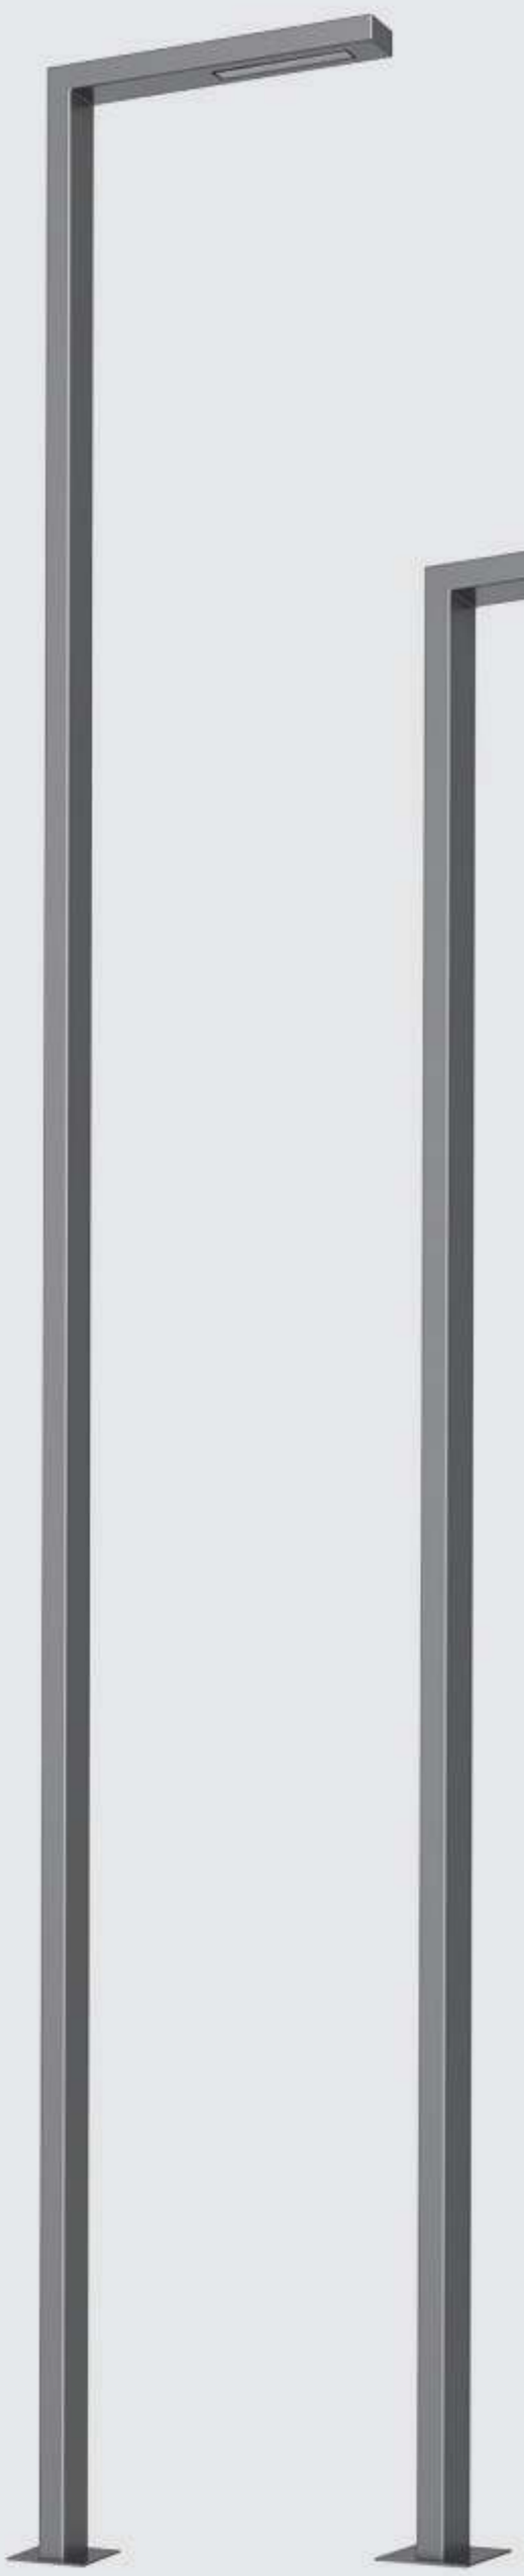

## Product Details







## Product Parameters

| PRODUCT NAME | JANE |
|---|---|
| Product Size (mm) | A:1350 X 200 X 100<br>B:1090 X 80 X 160 |
| Power | 30W / 60W / 90W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 10KV |
| Housing Material | Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 6-9m |
| Warranty | 5 Years |

## Light Distribution Curve

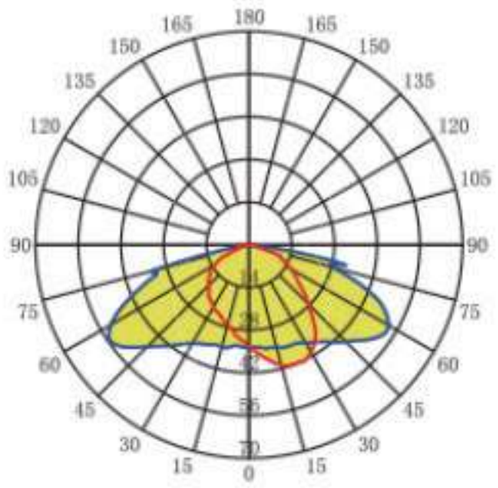


## Product Size

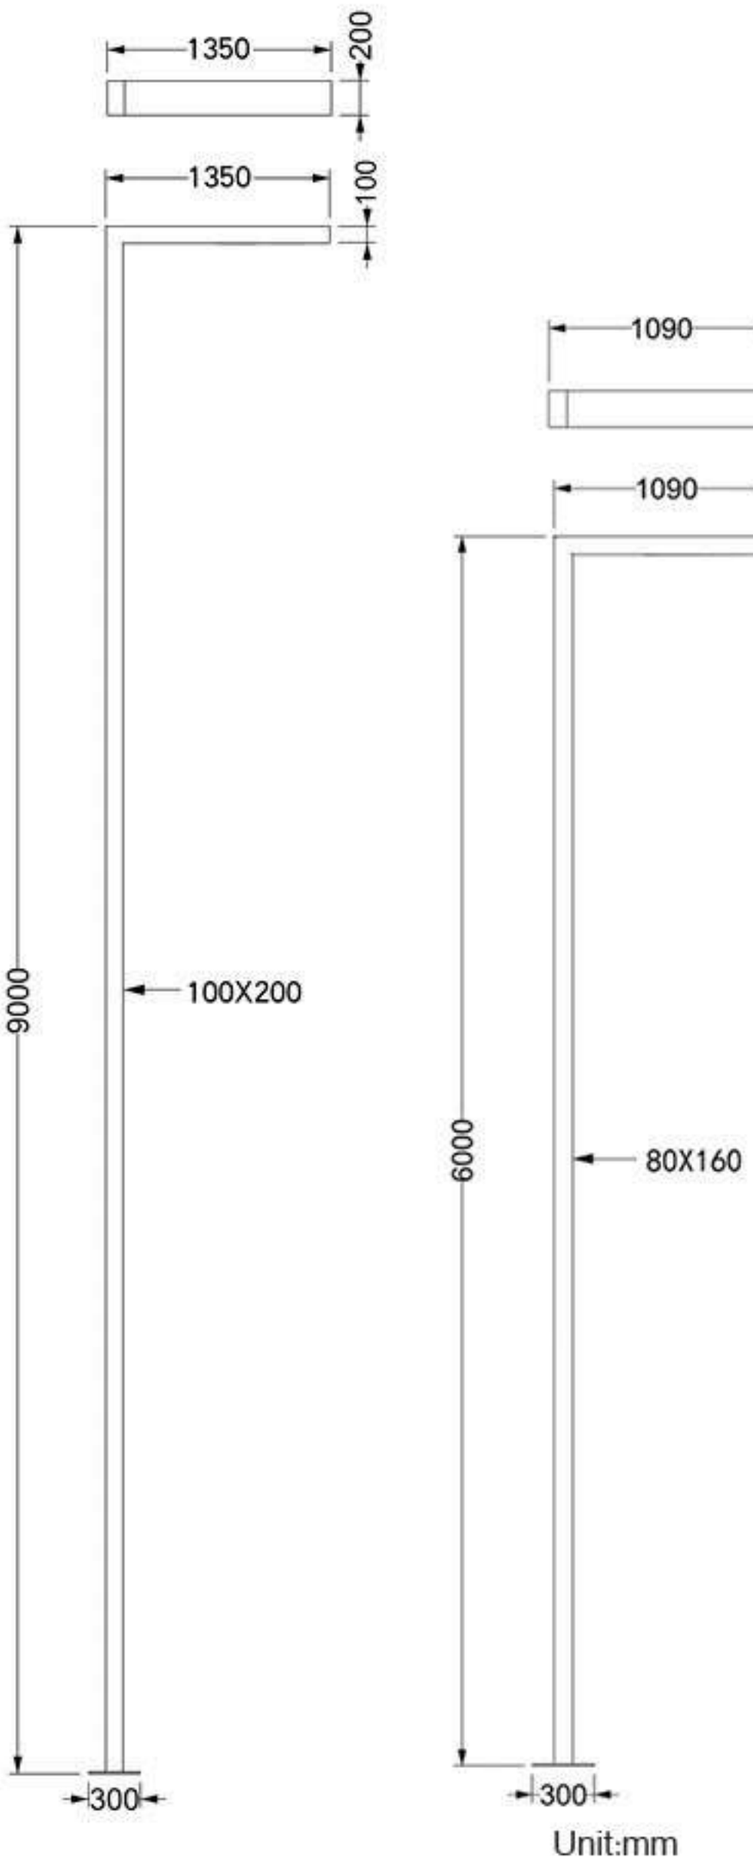



Unit:mm

## Product Rendering




# TENGDA-A/B

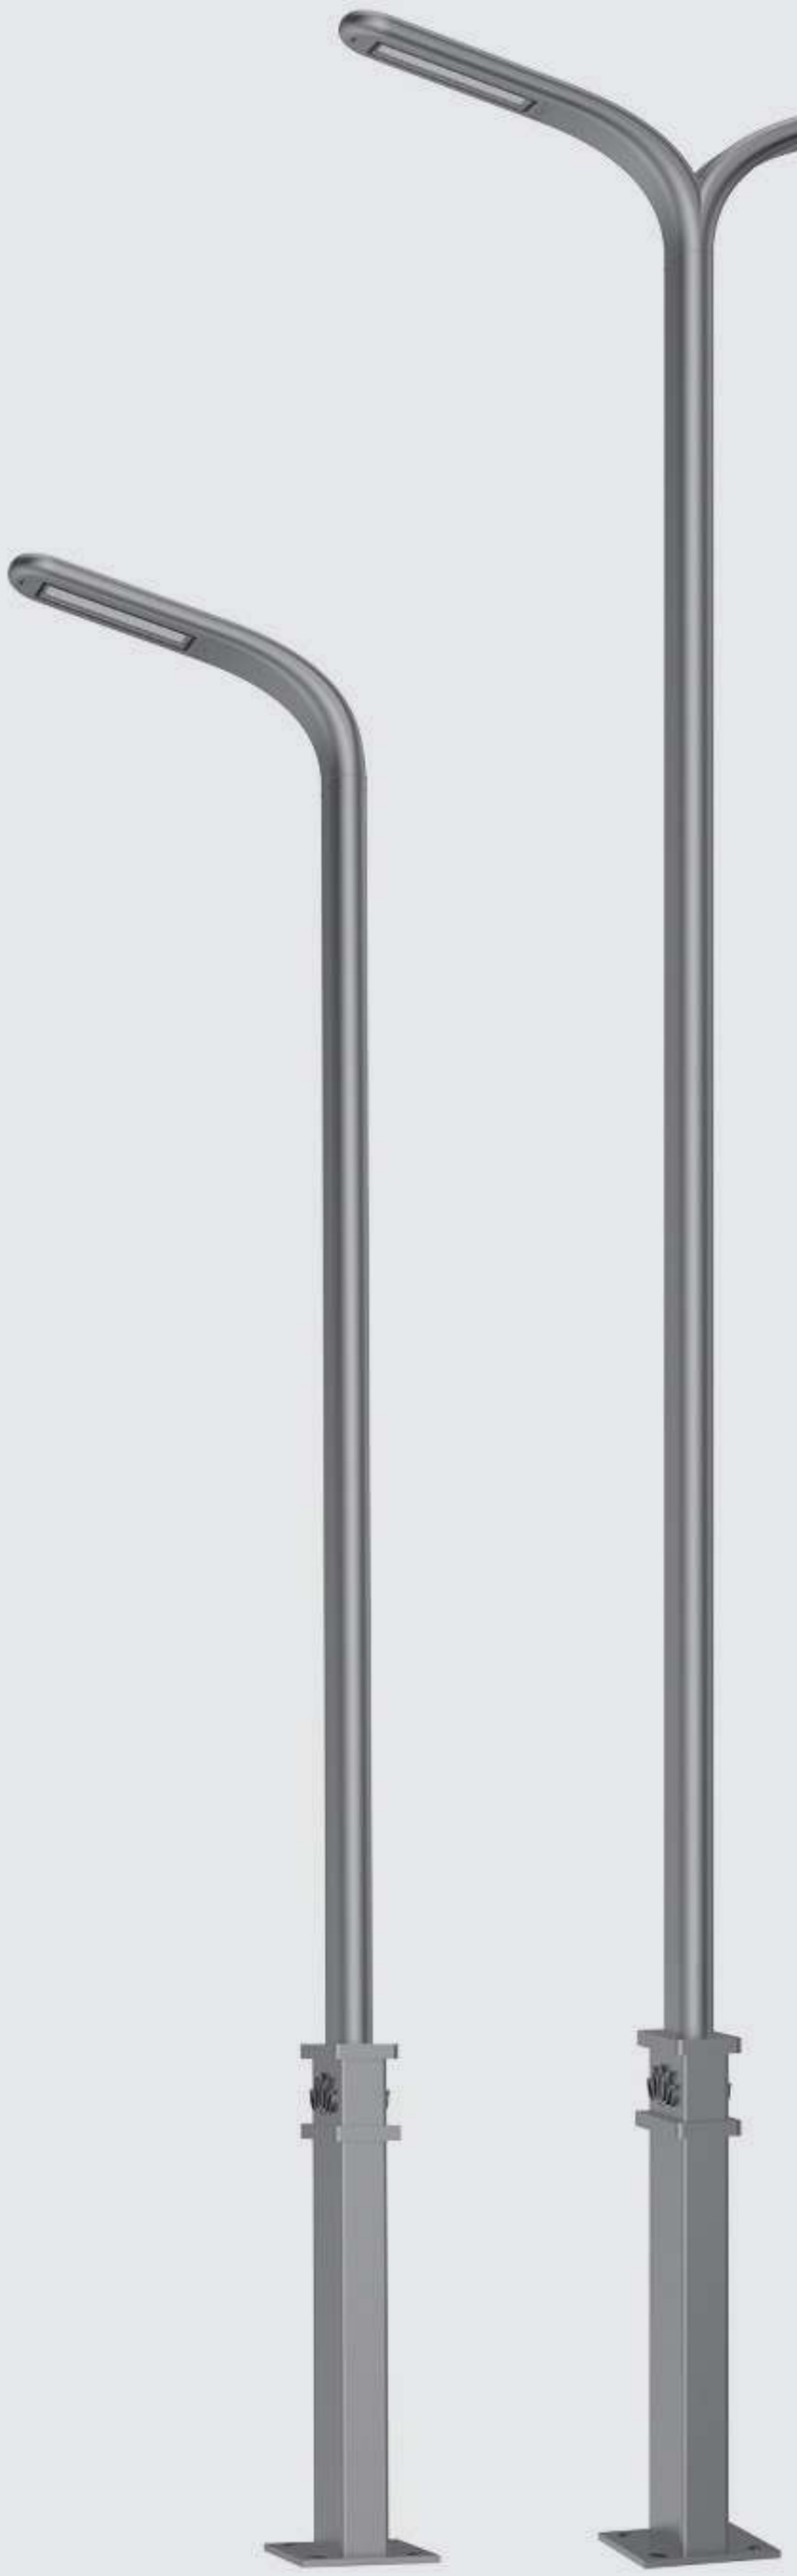

## Product Details




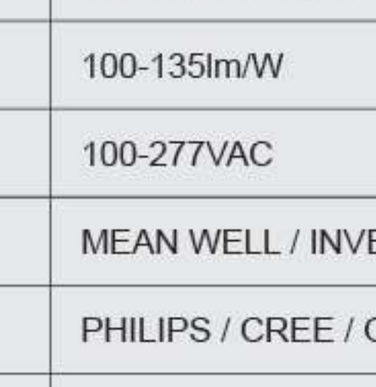


## Product Parameters

| PRODUCT NAME | TENGDA-A/B |
|---|---|
| Product Size (mm) | A: 760 X 170 X 420<br>B: 1435 X 170 X 420 |
| Power | 15W / 20W / 30W / 60W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3-6m |
| Warranty | 5 Years |

## Light Distribution Curve

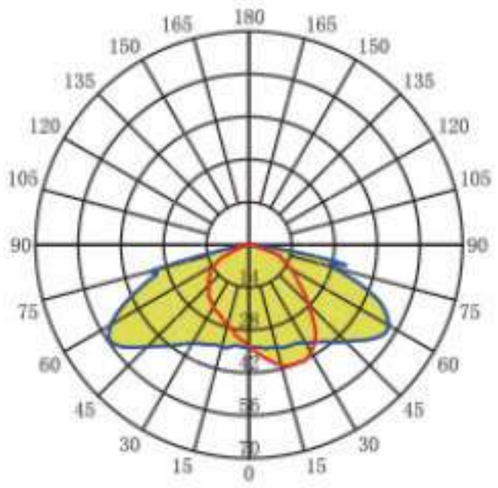



## Product Size

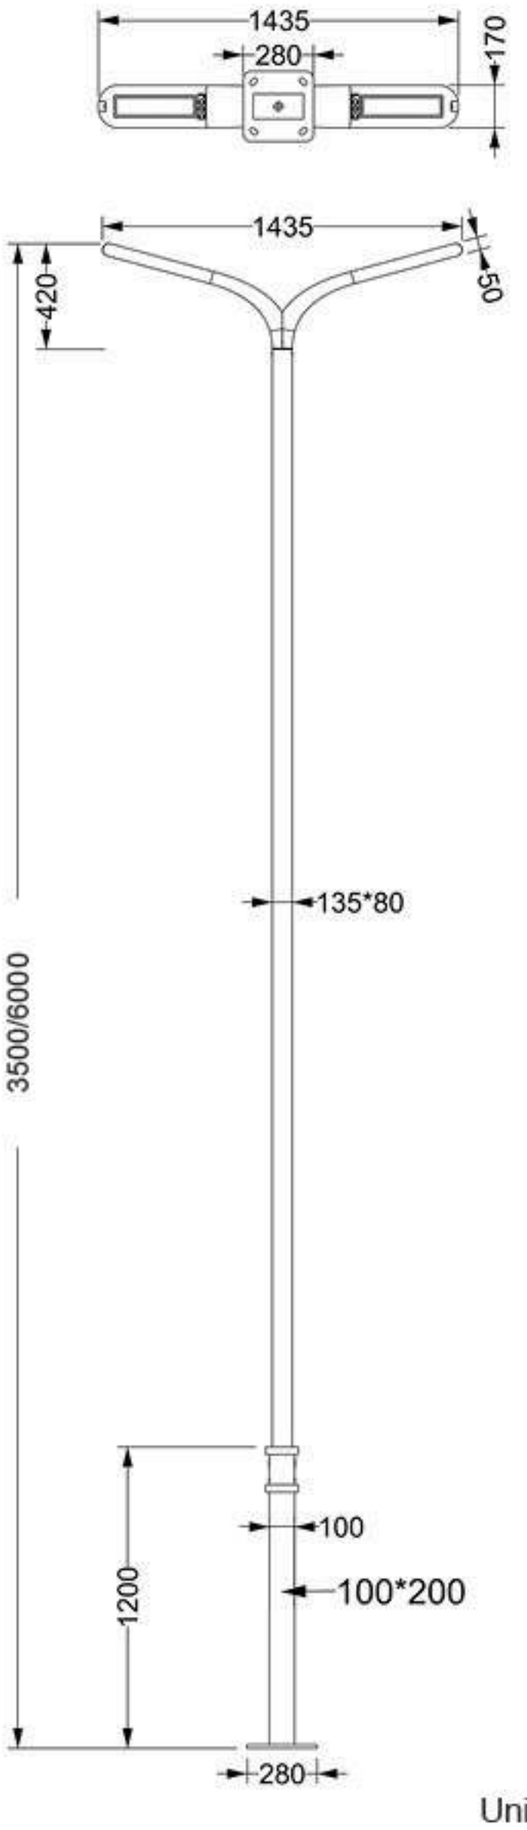



Unit:mm

## Product Rendering



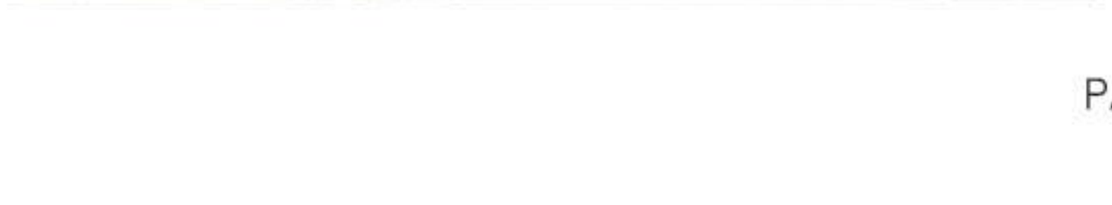

# PROSPECT

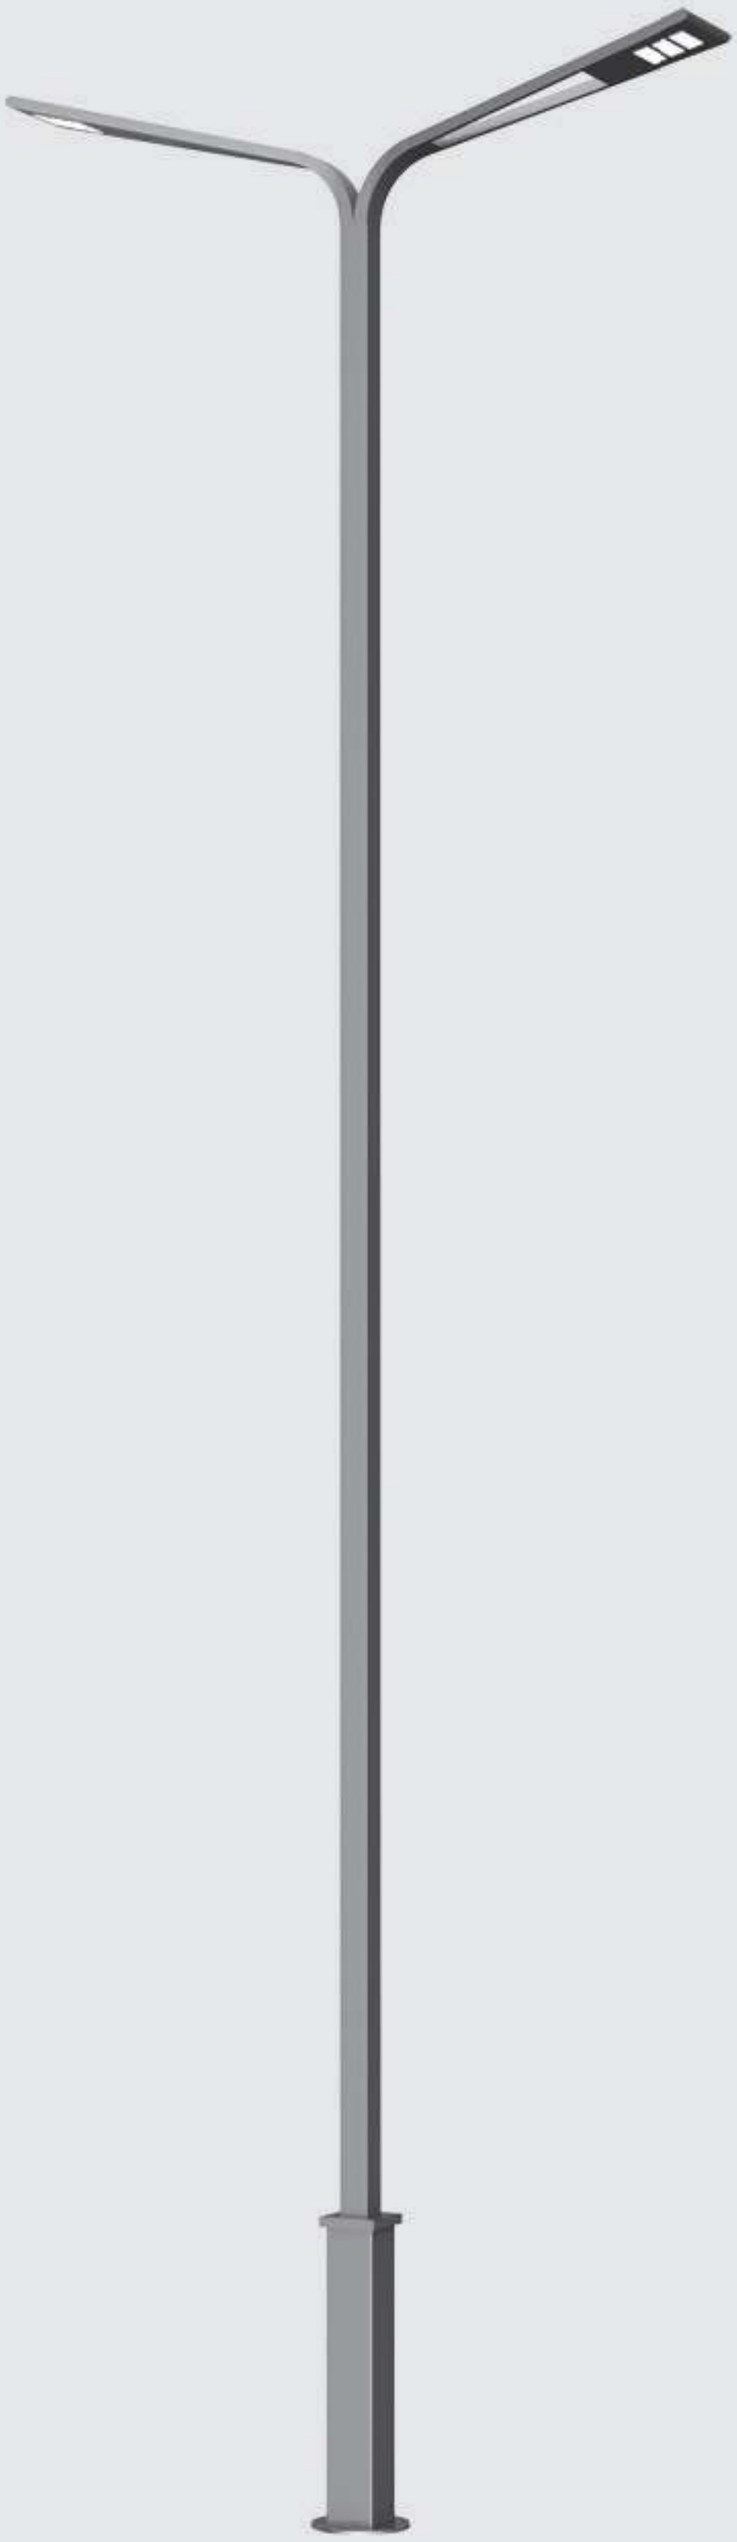

## Product Details







## Product Parameters

| PRODUCT NAME | PROSPECT |
|---|---|
| Product Size (mm) | 3750 X 500 |
| Power | 240W X 2 |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 10KV |
| Housing Material | Q235 Hot Dip Galvanized+Stainless Steel |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Module |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 6-12m |
| Warranty | 5 Years |
| Net Weight | 21.6 ± 0.5kgs (Double Heads) |

## Light Distribution Curve

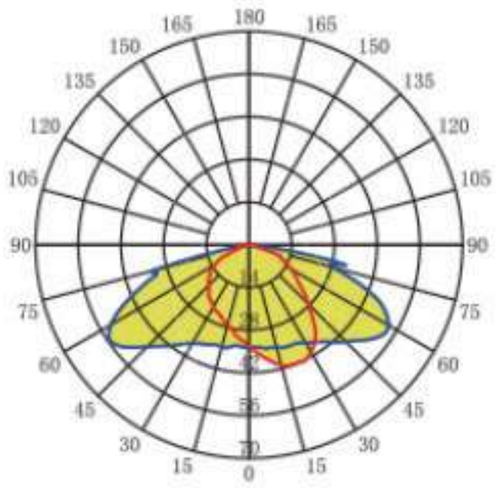


## Product Size

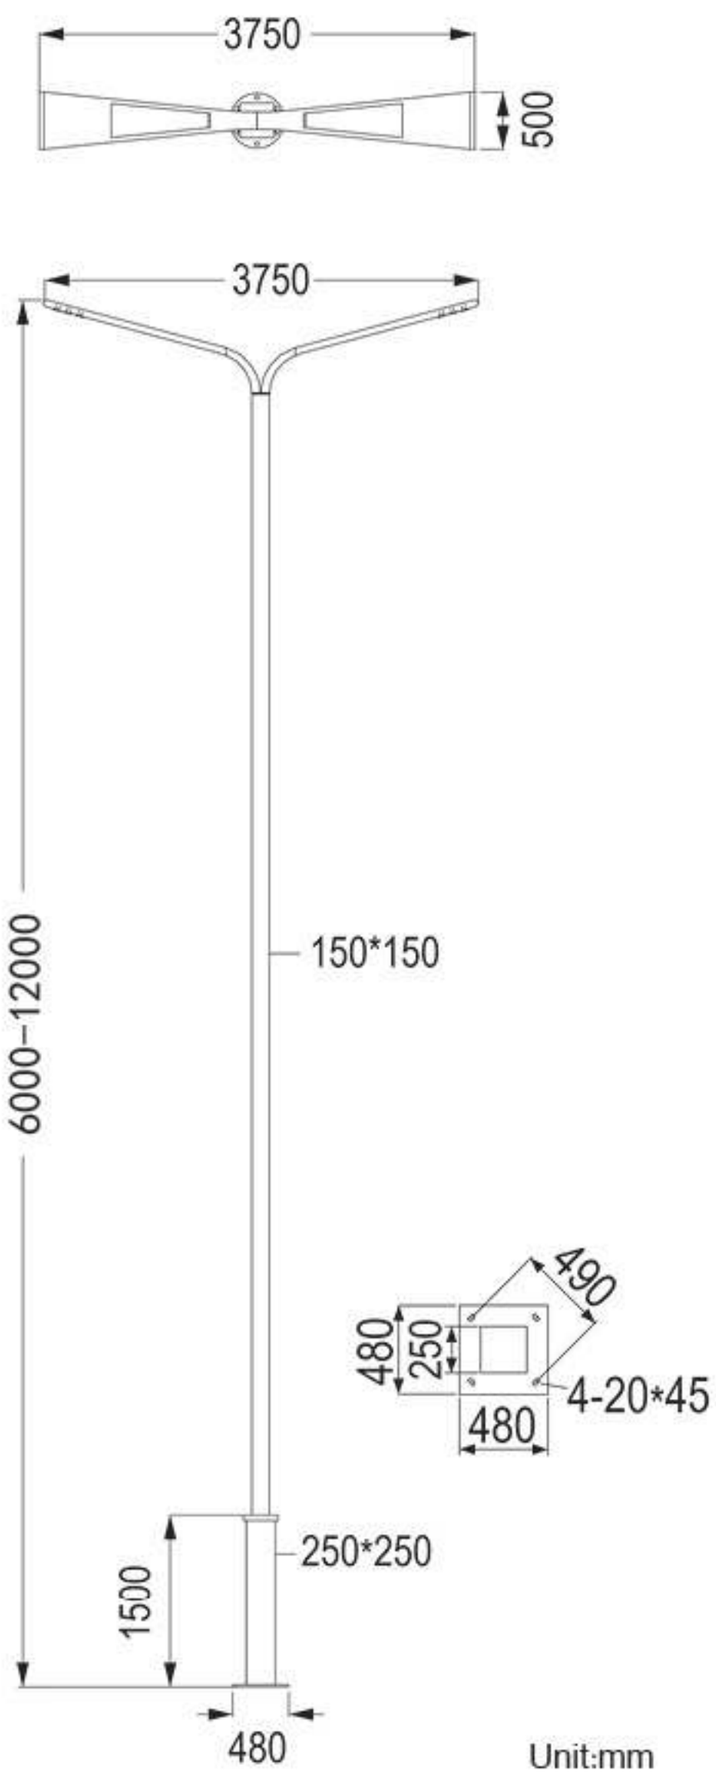


Unit:mm

## Product Rendering



# YT-008



## Product Details







## Product Parameters

| PRODUCT NAME | YT-008 |
|---|---|
| Product Size (mm) | φ500 X H160 |
| Power | 30W / 60W / 90W / 120W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum + Aluminum Profiles |
| Sealing Material | Silicone Rubber |
| Lampshade Material | Module / Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Suggested Mounting Height | 3-6m |
| Warranty | 5 Years |
| Net Weight | 6.8 ± 0.5kgs |

## Light Distribution Curve

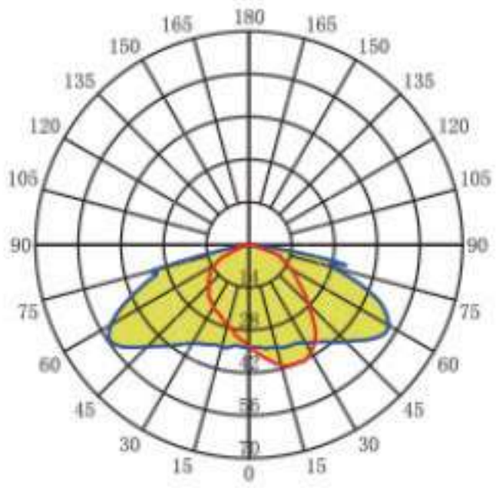


## Product Size

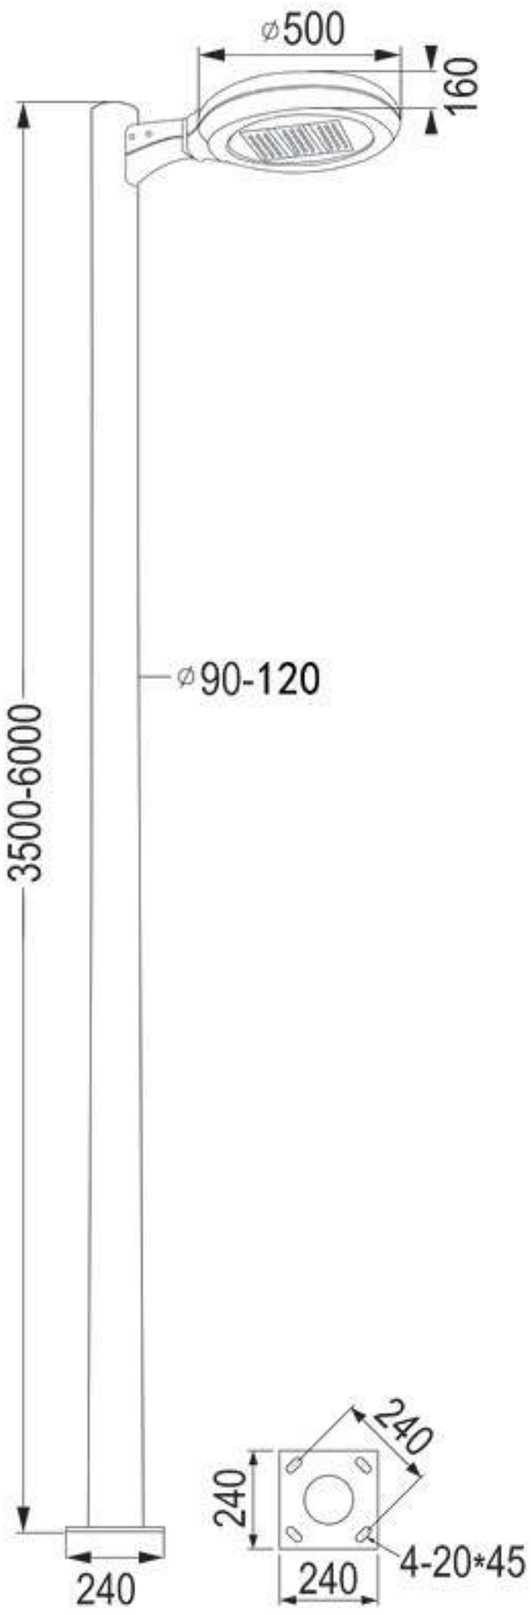



Unit:mm

## Product Rendering



# ANGELA

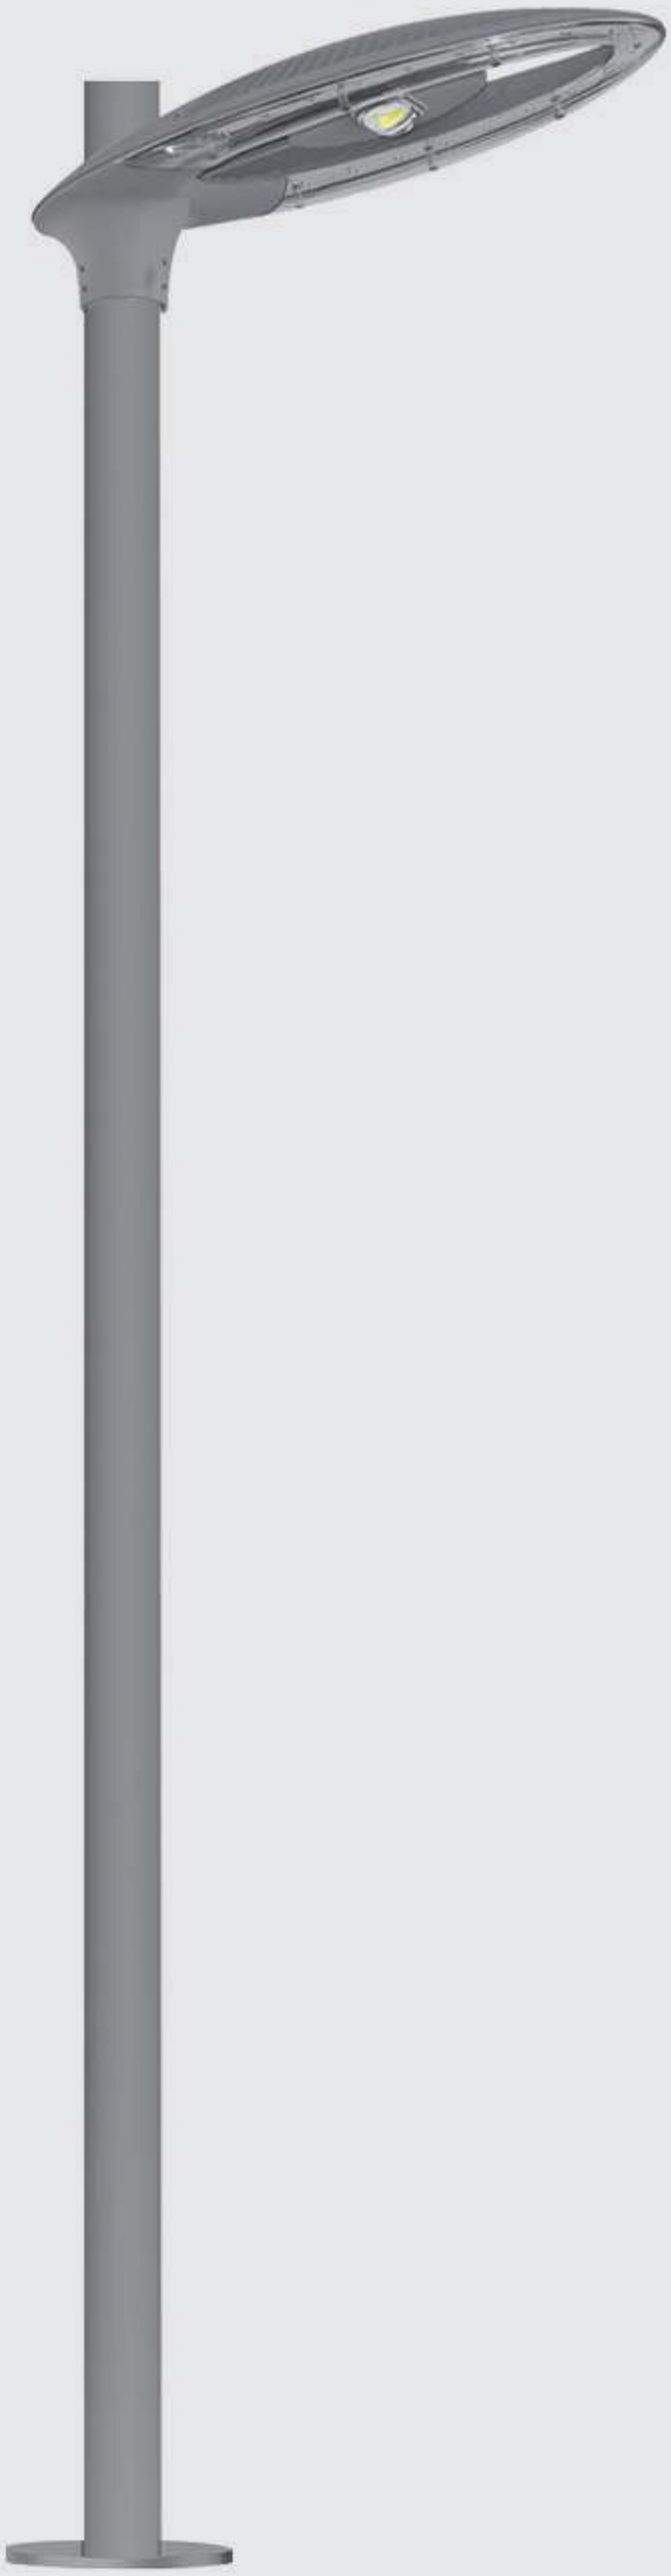

## Product Details







## Product Parameters

| PRODUCT NAME | ANGELA |
|---|---|
| Product Size (mm) | 1050 X 420 X 250 |
| Power | 60W / 100W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 70° X 150° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 115mm |
| Suggested Mounting Height | 5-6m |
| Warranty | 5 Years |

## Light Distribution Curve

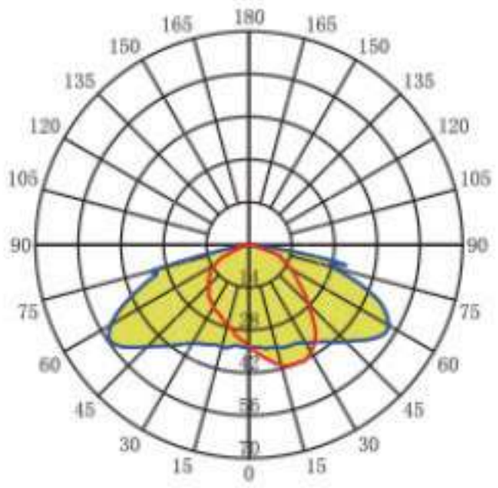


## Product Size

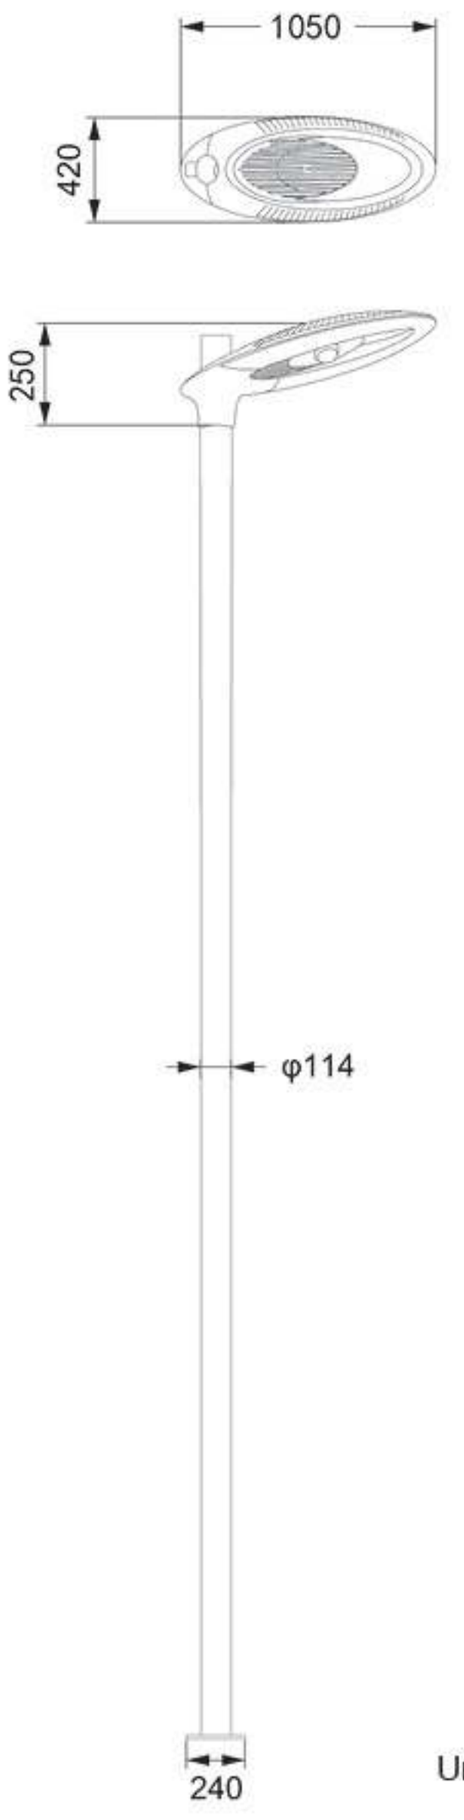



Unit:mm

## Product Rendering



# ADELA

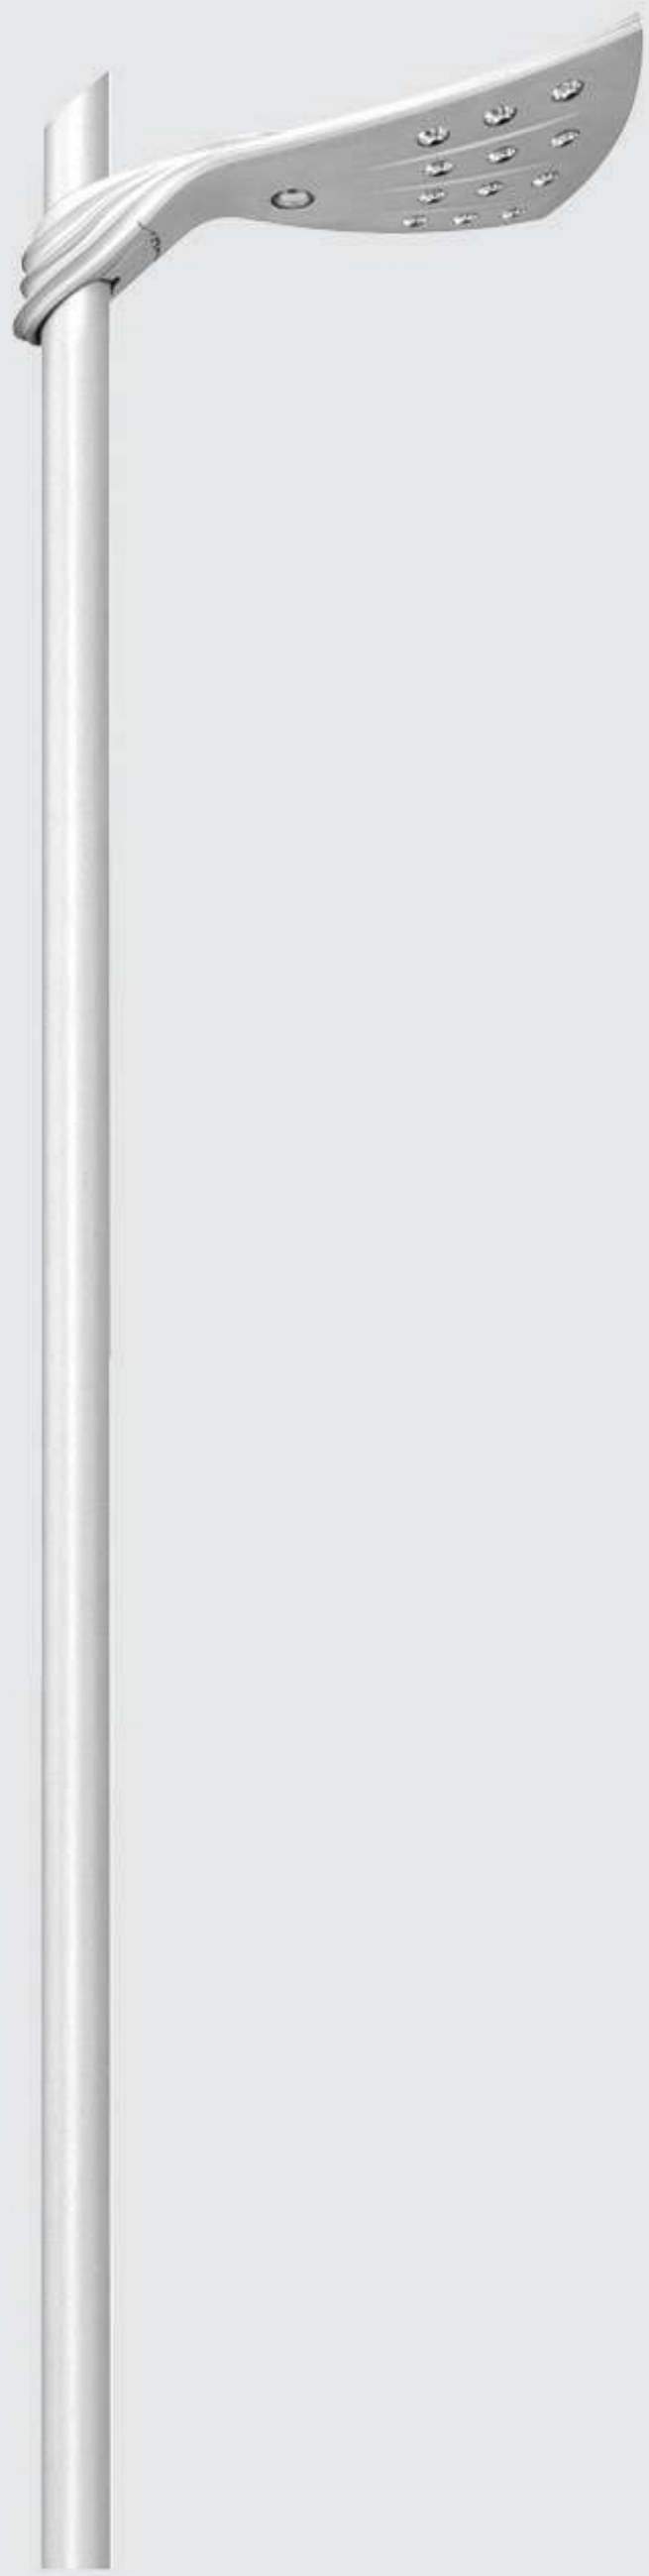


**Product Details**






| PRODUCT NAME | ADELA |
|---|---|
| Product Size (mm) | 915 X 560 X 320 |
| Power | 30W / 60W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Color Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum+Q235 Hot Dip Galvanized |
| Sealing Material | Silicone Rubber |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -25°C ~+55°C |
| Mounting Diameter | 115mm |
| Suggested Mounting Height | 3.5-6m |
| Warranty | 5 Years |

## Light Distribution Curve

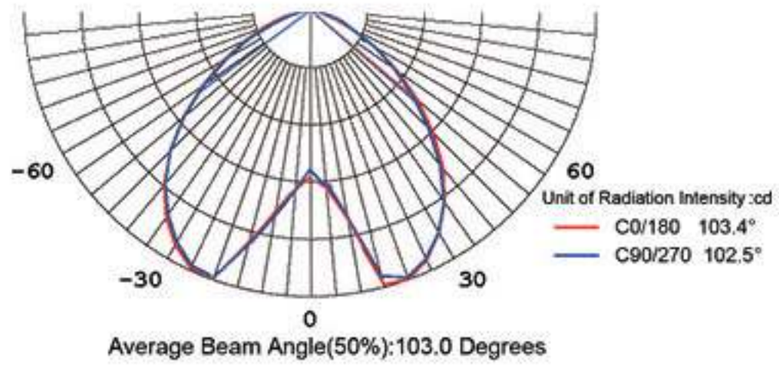


Average Beam Angle(50%):103.0 Degrees

## Product Size

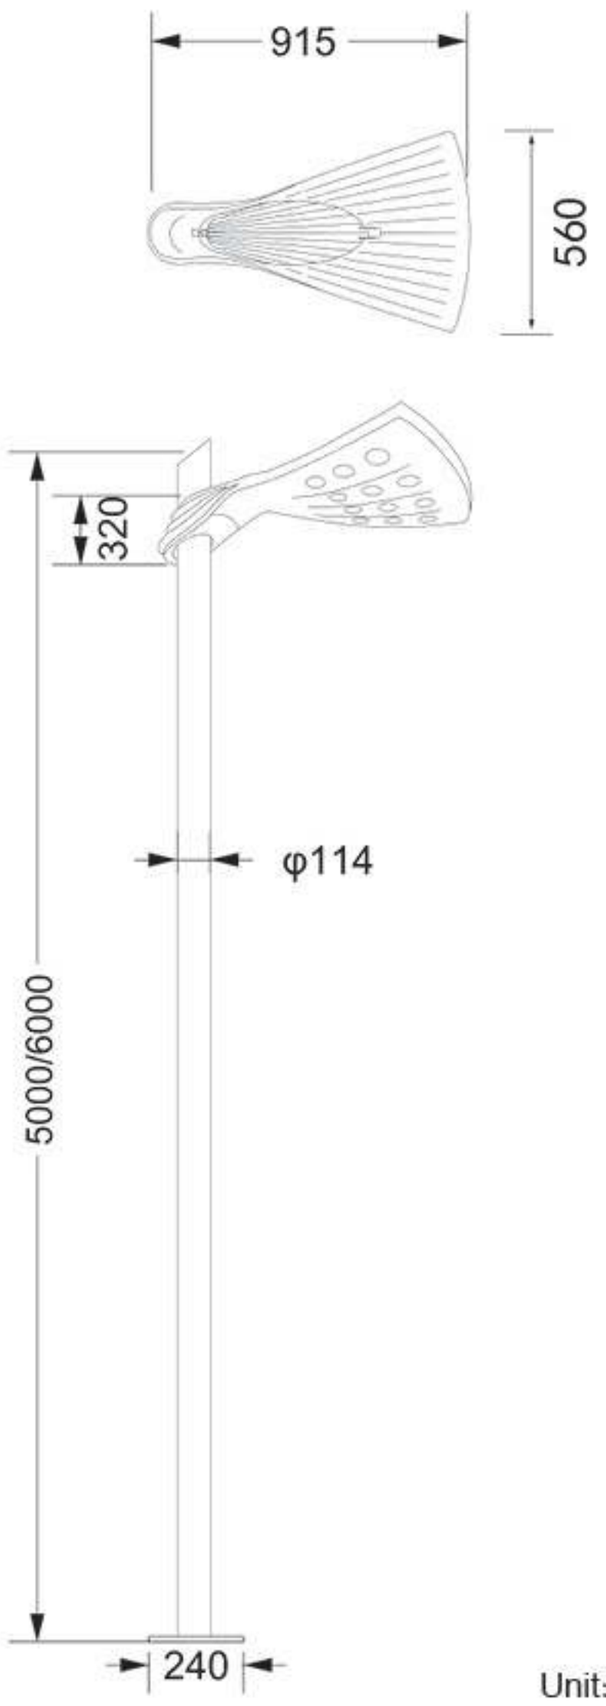



Unit:mm

## Product Rendering



# AMINA

**Product Size**

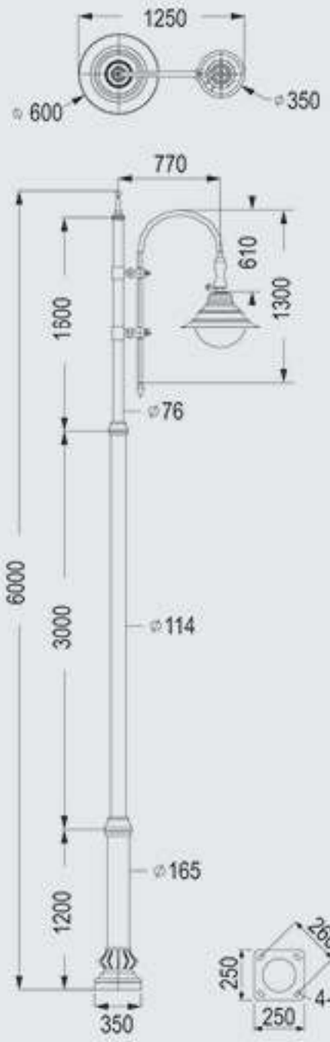


Unit:mm




# PEDESTRIAN STREET

**Product Parameters**

| Product Name | PEDESTRIAN STREET |
|---|---|
| Rated Power | 50W-60W-90WX2 |
| Input Voltage | 100-277V |
| Light Color | 3000K/4000K/5000K |
| Luminous Flux | 100lm/W |
| Beam Angle | 150°X70°X20° |
| LED Lifetime | > 70000H |
| Protection Grade | IP65 |



# SPARKLE

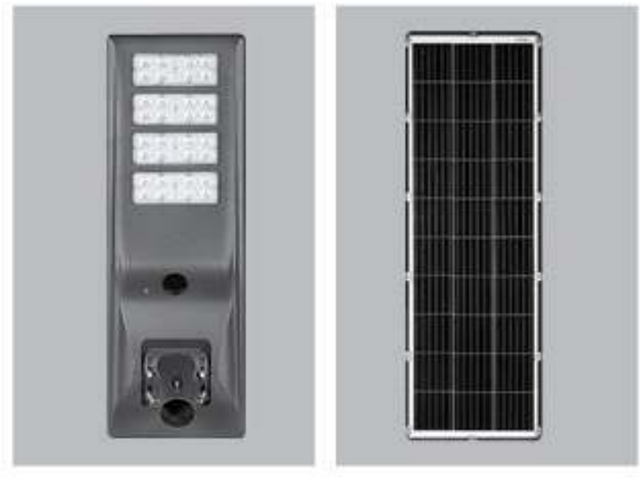




## Product Parameters

| Product Name | SPARKLE | | |
|---|---|---|---|
| Power | 40W | 60W | 80W |
| Lamp Size(mm) | 697 X 361 X 209 | 846 X 361 X 209 | 1096 X 361 X 209 |
| Chip | 3030/5050 | | |
| Solar Panel | 18V 40W | 18V 50W | 18V 65W |
| Battery | 12.8V 20AH | 12.8V 25AH | 12.8V 35AH |
| Lighting Time | Adjustable by Remote Control | | |

# ETERNITY

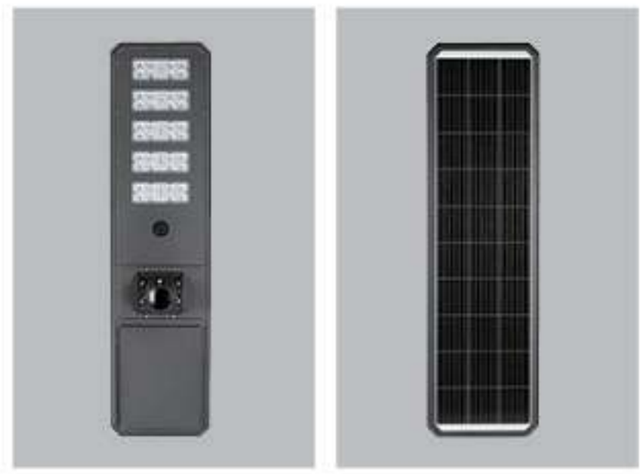



## Product Parameters

| Product Name | ETERNITY | | |
|---|---|---|---|
| Power | 60W | 80W | 100W |
| Lamp Size(mm) | 1122 X 387 X 68 | 1352 X 387 X 68 | 1522 X 387 X 68 |
| Chip | 3030/5050 | | |
| Solar Panel | 18V 60W | 18V 80W | 18V 90W |
| Battery | 12.8V 30AH | 12.8V 35AH | 12.8V 45AH |
| Lighting Time | Adjustable by Remote Control | | |

# LUCKY






## Product Parameters

| Product Name | LUCKY | |
|---|---|---|
| Power | 40W | 60W |
| Lamp Size(mm) | 1080 X 359 X 50 | 1250 X 359 X 50 |
| Chip | 3030/5050 | |
| Solar Panel | 18V 65W | 18V 65W |
| Battery | 12.8V 20AH | 12.8V 30AH |
| Lighting Time | Adjustable by Remote Control | |

# STARJOY

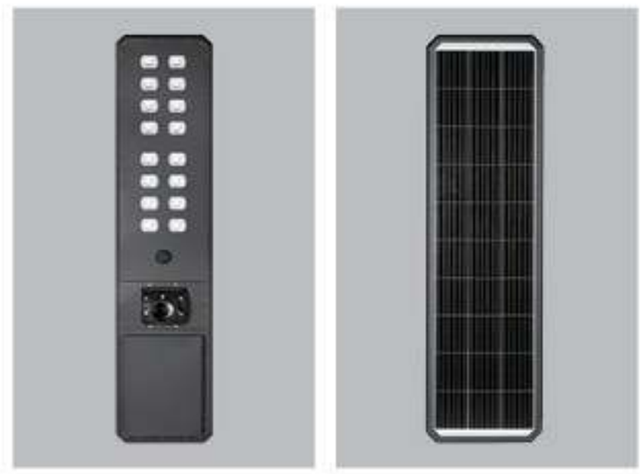



## Product Parameters

| Product Name | STARJOY | | |
|---|---|---|---|
| Power | 60W | 80W | 140W |
| Lamp Size(mm) | 1122 X 387 X 68 | 1352 X 387 X 68 | 1802 X 387 X 68 |
| Chip | 3030/5050 | | |
| Solar Panel | 18V 65W | 18V 80W | 18V 110W |
| Battery | 12.8V 30AH | 12.8V 35AH | 12.8V 45AH |
| Lighting Time | Adjustable by Remote Control | | |

# LOUISE



## Product Parameters

| Product Name | LOUISE |
|---|---|
| Power | 30W-60W |
| Chip | PHILIPS / CREE / OSRAM |
| Solar Panel | 70-100WP 18V |
| Battery | 12.8V 35~60AH or 6.4V70~120AH |
| Lighting Time | Adjustable by Remote Control |
| Suggested Mounting Height | 6-9m |

# KYLIE





## Product Parameters

| Product Name | KYLIE |
|---|---|
| Power | 20W-30W |
| Lamp Size(mm) | 920 X 360 X 140 |
| Chip | PHILIPS / CREE / OSRAM 3030/5050 |
| Solar Panel | 18V 50W |
| Battery | 12.8V 20AH |
| Lighting Time | Adjustable by Remote Control |
| Suggested Mounting Height | 6m |

# BLAZER







## Product Rendering




## Product Details

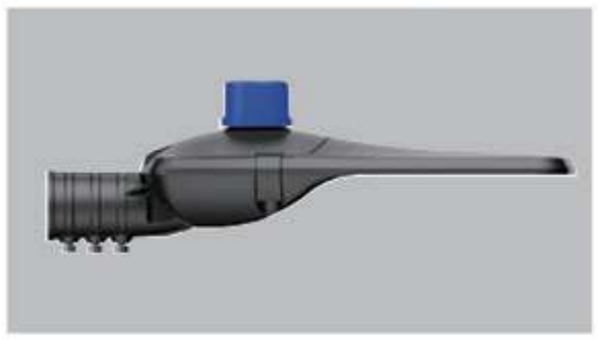

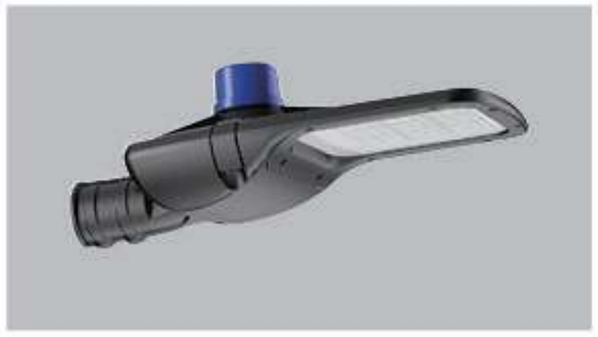
## Product Size

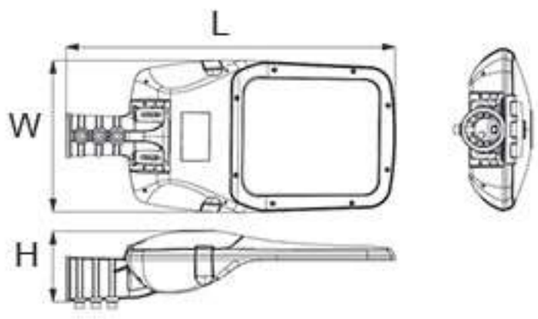



| Model No. | L*W*H(mm) | Kg |
|---|---|---|
| BLAZER-S | 525 X 200 X 130 | 3.90 |
| BLAZER-M | 535 X 242 X 130 | 4.45 |
| BLAZER-L | 605 X 300 X 130 | 5.65 |

## Product Parameters

| Product Name | **BLAZER-S** | **BLAZER-M** | **BLAZER-L** |
|---|---|---|---|
| Typical Power | 30/40/60W | 70/80/100W | 120/160W |
| Typical Efficacy(Lm/w) | 165 | 160 | 155 |
| Input Voltage | AC 100/120-240V/277V 50/60Hz | | |
| LED Driver | INVENTRONICS/MOSO/PHILIPS(available on request) | | |
| Power Factor | ≥0.95 | | |
| THD | <10% | | |
| Surge Protection | 10KV(Default)/15KV(available on request) | | |
| LED Components | SMD 5050 | | |
| CCT | 3000K,4000K,5000K,5700K | | |
| CRI | Ra>70(Default)/Ra>80 | | |
| Standard Deviation of Color Matching | <5 SDCM | | |
| Optics | Type I, Type II , Type III | | |
| IP | IP66 | | |
| IK | IK09 | | |
| Installation Size | φ60±5mm | | |
| Working Environment | -30℃ ~+50℃ | | |
| RH | 10%~90% | | |
| LED Lifespan | 100,000 Hours | | |

**NIKON**

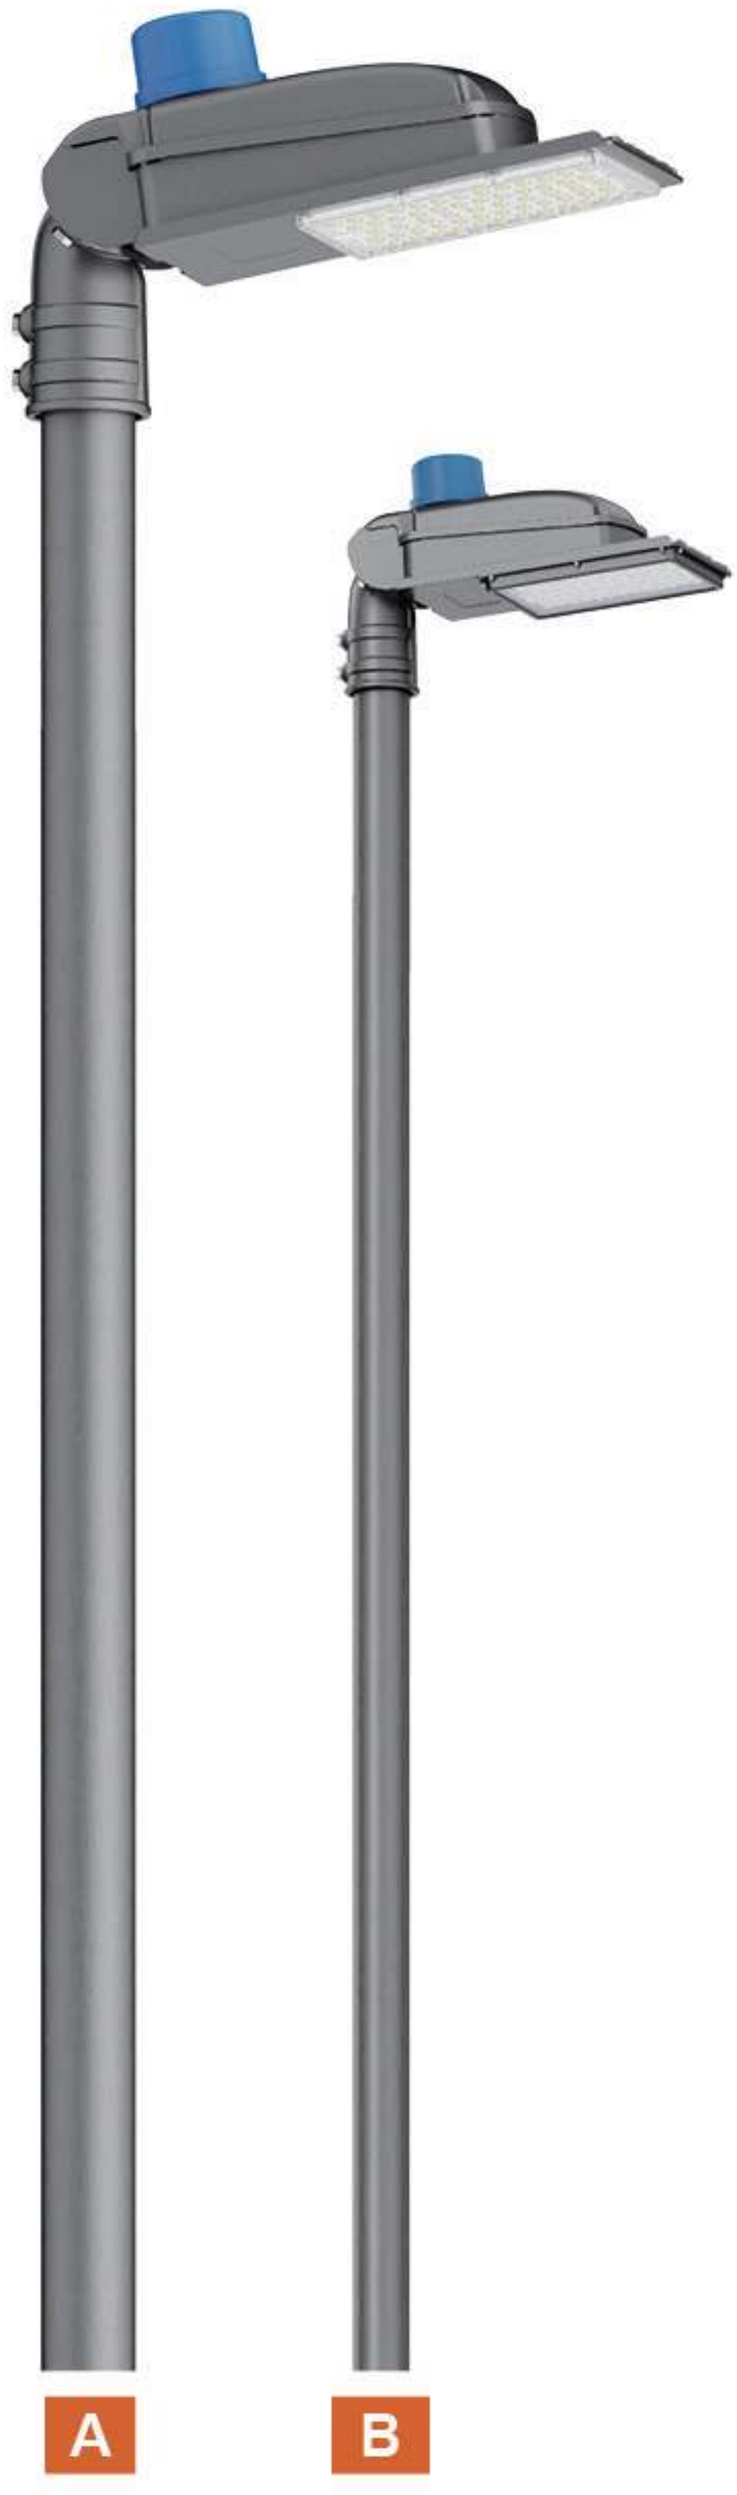


A





B

## Product Details

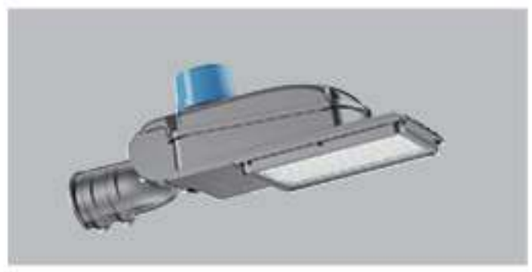



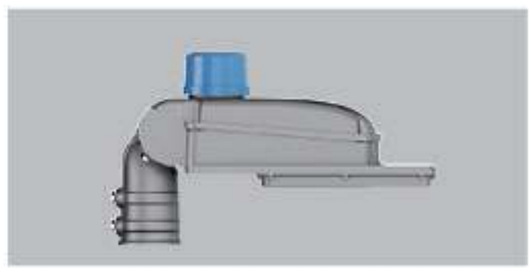


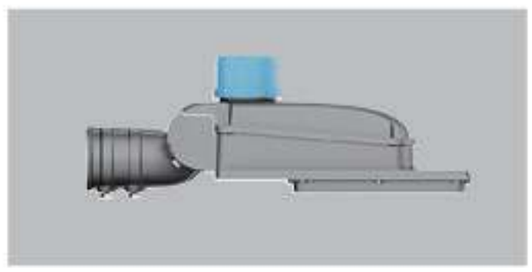


## Product Rendering



## Light Distribution Curve

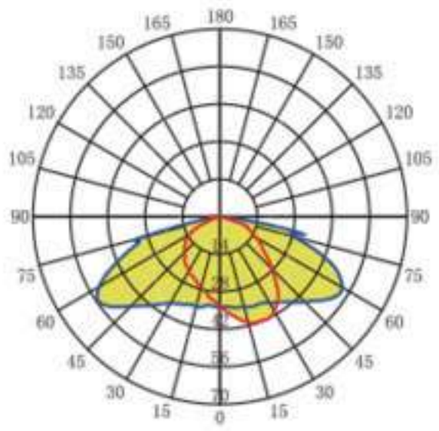


## Product Size

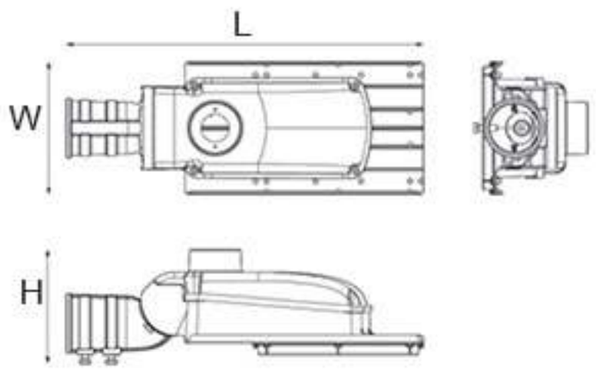


| Model No. | L*W*H(mm) | Kg |
|---|---|---|
| NIKON-A | 433 X 135 X 145 | 2.50 |
| NIKON-A | 472 X 175 X 150 | 3.00 |
| NIKON-B | 433 X 135 X 145 | 2.75 |
| NIKON-B | 472 X 175 X 150 | 3.50 |

## Product Parameters

| Product Name | NIKON-A | | NIKON-B | |
|---|---|---|---|---|
| Typical Power | 20/30/40W | 50/60/75/80W | 20/30/40W | 50/60/75/80W |
| Typical Efficacy(Lm/w) | 165±5 | 160±5 | 156±5 | 152±5 |
| Input Voltage | AC 100/120-240V/277V 50/60Hz | | | |
| LED Driver | INVENTRONICS/MOSO/PHILIPS(available on request) | | | |
| Power Factor | ≥0.95 | | | |
| THD | <10% | | | |
| Surge Protection | 10KV | | | |
| LED Components | SMD 5050 | | | |
| CCT | 3000K,4000K,5000K,5700K | | | |
| CRI | Ra>70 | | | |
| Standard Deviation of Color Matching | <5 SDCM | | | |
| Optics | Type I, Type II , Type III | | | |
| IP | IP66 | | | |
| IK | IK09 | | | |
| Installation Size | φ60±5mm | | | |
| Working Environment | -30℃ ~+50℃ | | | |
| RH | 10%~90% | | | |
| LED Lifespan | 100,000 Hours | | | |

# ADVENTURE






## Product Rendering




## Product Details

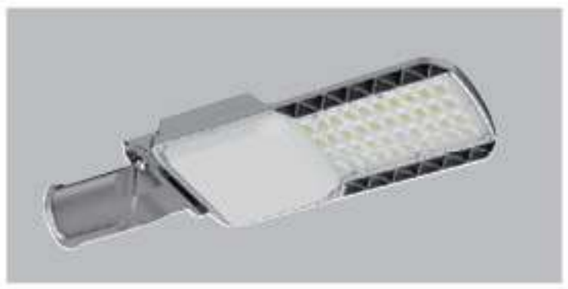






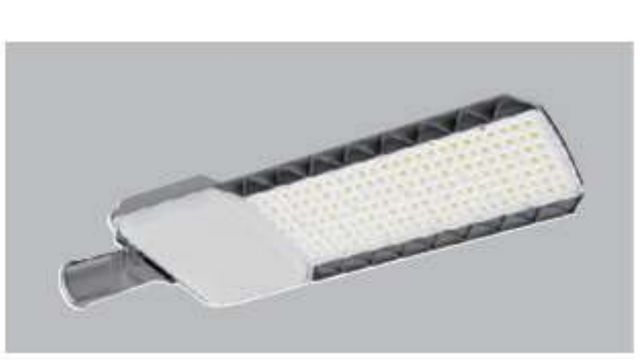

## Product Size

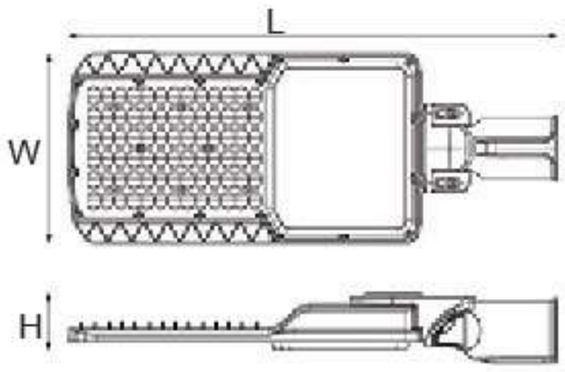


| Model No. | L*W*H(mm) | Kg |
|---|---|---|
| ADVENTURE-S | 485 X 188 X 67 | 2.00 |
| ADVENTURE-M | 565 X 220 X 67 | 2.65 |
| ADVENTURE-L | 660 X 240 X 67 | 3.20 |
| ADVENTURE-XL | 760 X 276 X 67 | 3.70 |

## Product Parameters

| Product Name | ADVENTURE-S | ADVENTURE-M | ADVENTURE-L | ADVENTURE-XL |
|---|---|---|---|---|
| Typical Power | 50W | 100W | 150W | 200W |
| Typical Efficacy(Lm/w) | 160（UP TO 200) | | | |
| Input Voltage | AC 100/120-240V/277V 50/60Hz | | | |
| LED Driver | INVENTRONICS/MOSO/PHILIPS(available on request) | | | |
| Power Factor | ≥0.95 | | | |
| THD | <10% | | | |
| Surge Protection | 10KV | | | |
| LED Components | SMD 5050 | | | |
| CCT | 3000K,4000K,5000K,5700K,6000K,6500K | | | |
| CRI | Ra>70 | | | |
| Standard Deviation of Color Matching | <5 SDCM | | | |
| Optics | Type I, Type II , Type III | | | |
| IP | IP66 | | | |
| IK | IK08 | | | |
| Installation Size | φ60±5mm | | | |
| Working Environment | -30℃ ~+50℃ | | | |
| RH | 10%~90% | | | |
| LED Lifespan | 100,000 Hours | | | |

# LEXUS





## Product Rendering



# SHINELAND





## Product Parameters

| Product Name | SHINELAND | | |
|---|---|---|---|
| Rated Power | 120W | 160W | 240W |
| Inner Box Size(mm) | 720 X 271 X 108 | 750 X 333 X 115 | 850 X 333 X 115 |
| Package Dimensions(mm) | 760 X 310 X 145 | 1020 X 360 X 65 | 1100 X 360 X 65 |
| Weight (N.W) | 4.5kgs | 5.7kgs | 7.7kgs |
| LED Qty (PHILIPS) | SMD3030 192PCS | SMD3030 256PCS | SMD3030 384PCS |
| Power Supply | PHILIPS 100W | PHILIPS 150W | PHILIPS 240W |

# ARNIE-B











## Product Parameters

| Product Name | ARNIE-B | | |
|---|---|---|---|
| Rated Power | 100W | 150W | 200W |
| Rated Voltage | AC100V-277V | | |
| Protection Grade | IP65 | | |
| Anti-corrosion Grade | WF2 | | |
| Size(mm) | 500 X 245 X 75 | 600 X 295 X 90 | 600 X 295 X 90 |
| Luminous Efficacy | 10000lm | 15000lm | 20000lm |
| Net Weight | 3.91kgs | 5.74kgs | 5.43kgs |
| Warranty | 3 years | | |

# ARNIE-A







## Product Parameters

| Product Name | ARNIE-A |
|---|---|
| Rated Power | 120W |
| Rated Voltage | AC100V-277V |
| Protection Grade | IIP65 |
| Anti-corrosion Grade | WF2 |
| Size(mm) | 560 X 228 X 85 |
| Luminous Efficacy | 12000lm |
| Net Weight | 3.41kgs |
| Warranty Period | 3 years |

# KISRO











## Product Parameters

| Product Name | KISRO | | |
|---|---|---|---|
| Rated Power | 75W | 150W | 200W |
| Rated Voltage | AC100V-277V/50-60Hz | | |
| Protection Grade | IP66 | | |
| Anti-corrosion Grade | WF2 | | |
| Size(mm) | 493 X 261 X 124 | 594 X 261 X 124 | 695 X 261 X 124 |
| Luminous Efficacy | 9000lm | 18000lm | 24000lm |
| Net Weight | 7.21kgs | 8.78kgs | 10.53kgs |
| Warranty | 3 years | | |

# DAWN











## Product Parameters

| Product Name | DAWN | | |
|---|---|---|---|
| Rated Power | 150W | 250W | 300W |
| Rated Voltage | AC100V-277V | | |
| Protection Grade | IP65 | | |
| Anti-corrosion Grade | WF2 | | |
| Size(mm) | 860 X 360 X 65 | 1020 X 360 X 65 | 1100 X 360 X 65 |
| Luminous Efficacy | 15000lm | 25000lm | 230000lm |
| Net Weight | 7.21kgs | 8.78kgs | 10.53kgs |
| Warranty | 3 years | | |

# DLONG









## Product Parameters


| Product Name | DLONG | |
|---|---|---|
| Rated Power | 70W | 120W |
| Rated Voltage | AC100V-277V | |
| Protection Grade | IP65 | |
| Anti-corrosion Grade | WF2 | |
| Size(mm) | 460 X 200 X 84 | 520 X 250 X 85 |
| Luminous Efficacy | 11200lm | 19200lm |
| Net Weight | 2.28kgs | 3.19kgs |
| Warranty | 3 years | |

# SHINE








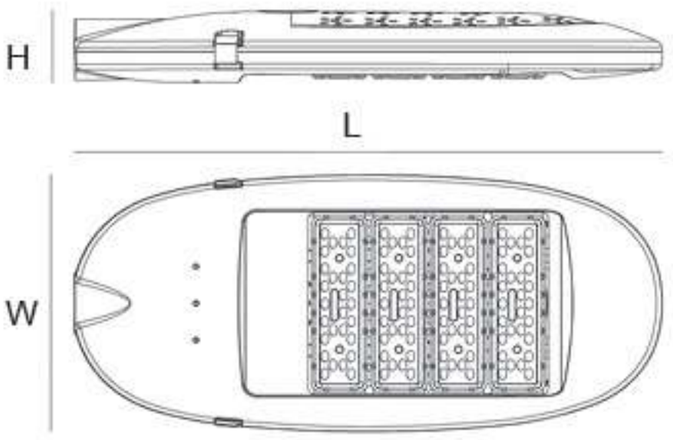


## Product Parameters

| Product Name | SHINE |
|---|---|
| Rated Power | 200W |
| Rated Voltage | AC100V-277V |
| Protection Grade | IIP65 |
| Anti-corrosion Grade | WF2 |
| Size(mm) | 806 X 352 X 98 |
| Luminous Efficacy | 32000lm |
| Net Weight | 6.20kgs |
| Warranty Period | 3 years |

# CAESAR-A

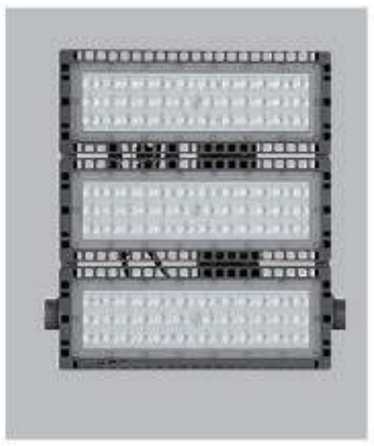





1 2 3 4

## Product Parameters

| Product Name | CAESAR-A | | | |
|---|---|---|---|---|
| Rated Power | 1-100W | 2-200W | 3-300W | 4-400W |
| Rated Voltage | AC100V-277V | | | |
| Protection Grade | IP65 | | | |
| Anti-corrosion Grade | WF2 | | | |
| Size(mm) | 395 X 100 X 75 | 395 X 200 X 75 | 395 X 310 X 75 | 395 X 405x75 |
| Luminous Efficacy | 10000lm-15000lm | 20000lm-30000lm | 30000lm-45000lm | 40000lm-60000lm |
| Net Weight | 2.52kgs | 4.25kgs | 5.74kgs | 7.85kgs |
| Warranty | 3 years | | | |

# CAESAR-B













1 2 3 4

## Product Parameters

| Product Name | CAESAR-B | | | |
|---|---|---|---|---|
| Rated Power | 1-200W | 2-400W | 3-600W | 4-800W |
| Rated Voltage | AC100V-277V | | | |
| Protection Grade | IP65 | | | |
| Anti-corrosion Grade | WF2 | | | |
| Size(mm) | 550 X 155 X 90 | 500 X 325 X 90 | 500 X 495 X 90 | 500 X 665x90 |
| Luminous Efficacy | 20000lm | 40000lm | 60000lm | 80000lm |
| Center eye Distance | 15cm/32cm | | | |
| Net Weight | 3.74kgs | 6.91kgs | 9.94kgs | 12.84kgs |
| Warranty | 2 years | | | |

# CAESAR-C





2

4

6



8

12


## Product Parameters


| Product Name | CAESAR-C | | | | |
|---|---|---|---|---|---|
| Rated Power | 2-20-30W | 4-50-60W | 6-70-100W | 8-100-120W | 12-160-200W |
| Rated Voltage | AC100V-277V | | | | |
| Protection Grade | IP65 | | | | |
| Anti-corrosion Grade | WF2 | | | | |
| Size(mm) | 175 X 175 X 35 | 210 X 220 X 45 | 255 X 270 X 55 | 280 X 310 X 65 | 320 X 350 X 65 |
| Luminous Efficacy | 3000lm | 50000lm | 10000lm | 15000lm | 20000lm |
| Net Weight | 0.78kgs | 1.25kgs | 2.15kgs | 3.05kgs | 3.96kgs |
| Warranty | 3 years | | | | |

# HERO







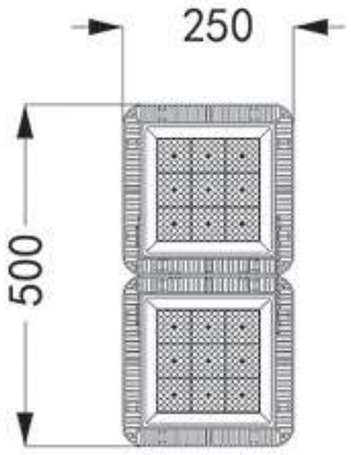





## Product Parameters

| Product Name | HERO-B | HERO-A | HERO-D | HERO-F | HERO-E |
|---|---|---|---|---|---|
| Rated Power | 100W | 100W*2 | 100W*3 | 100W*4 | 100W*9 |
| Rated Voltage | AC 100V-277V | | | | |
| Protection Grade | IP65 | | | | |
| Luminous Fiux | 120-150lm/W | | | | |
| Size(mm) | 250 X 500 | 250 X 250 | 250 X 750 | 500 X 500 | 753 X 753 |
| Colour Temperature | 3000K/4000K/5000K | | | | |
| Beam Angle | 10° / 25° / 50° / 90° / 160° X 80° | | | | |
| LED Lifetime | > 70000H | | | | |
| Warranty | 5 years | | | | |

# APPLE

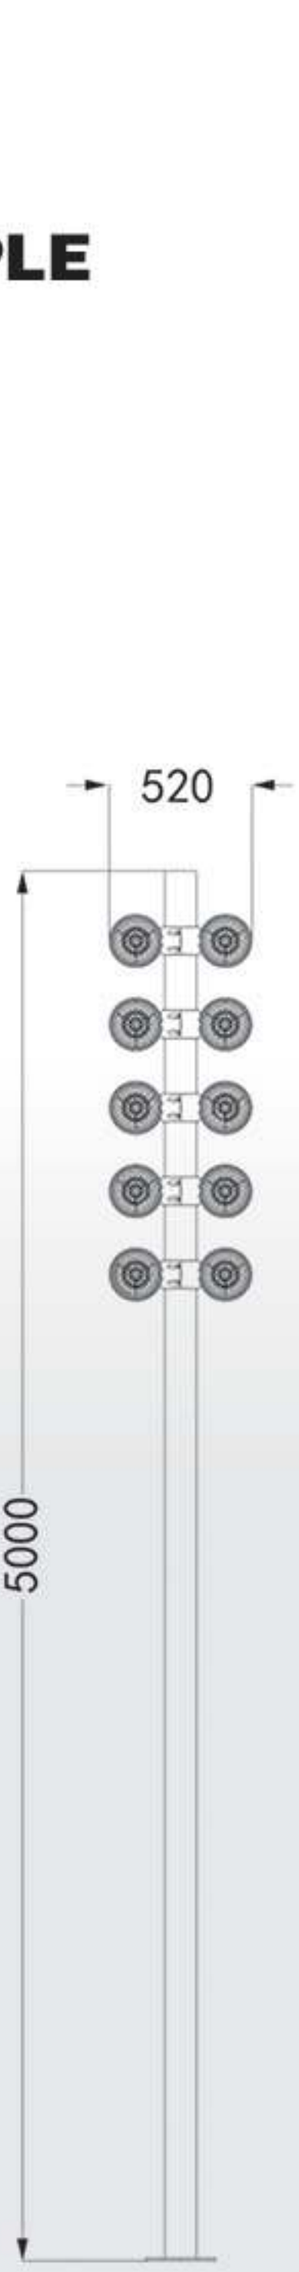
















| Product Name | APPLE |
|---|---|
| Power | 10W-30W-50W-70W-90W |
| | 10W-30W-50W-70W-90W |
| Rated Voltage | AC100-277V |
| Colour Temperature | 3000K-5000K-6000K |
| Efficiency | 120-160lm/W |
| Beam Angle | 3.5° / 5° / 7° / 15° / 40° / 60° / 70 X 145° |
| Protection Grade | IP65 |


# EXQUISITE





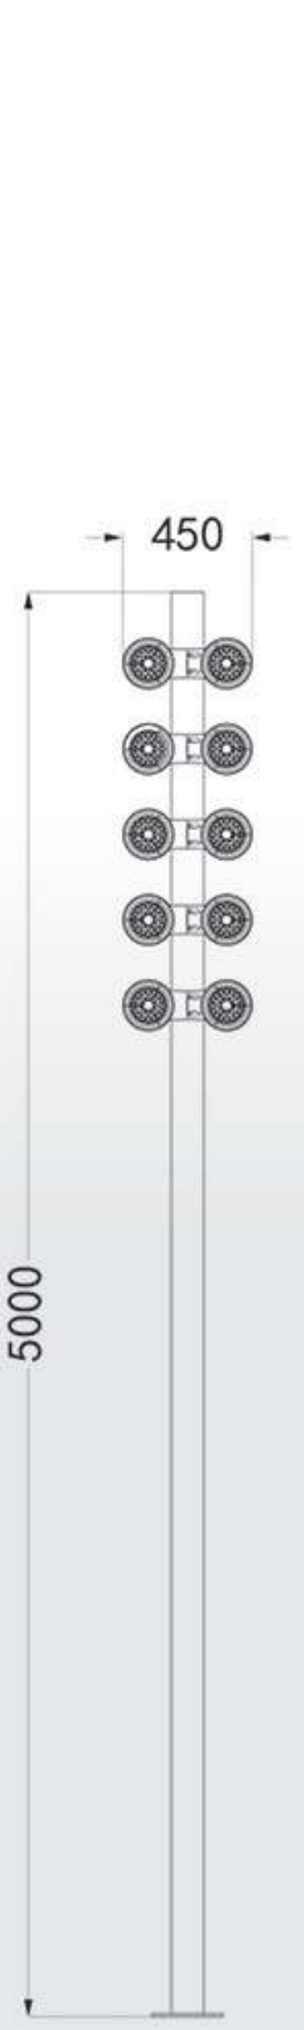


| Product Name | EXQUISITE |
|---|---|
| Power | 10W-30W-50W-70W-90W |
| | 10W-30W-50W-70W-90W |
| Rated Voltage | AC100-277V |
| Colour Temperature | 3000K-5000K-6000K |
| Efficiency | 120-160lm/W |
| Beam Angle | 3.5° / 5° / 7° / 15° / 40° / 60° / 70 X 145° |
| Protection Grade | IP65 |

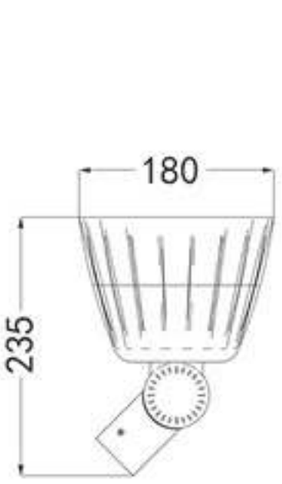




# LEITER






## Product Parameters

| Product Name | LEITER |
|---|---|
| Power | 30W-50W |
| Rated Voltage | AC100-277V |
| Colour Temperature | 3000K-5000K-6000K |
| Efficiency | 120-160lm/W |
| Beam Angle | 360° X 160° |
| Protection Grade | IP65 |
| Dimensions(mm) | 230 X 90 |

## Product Size

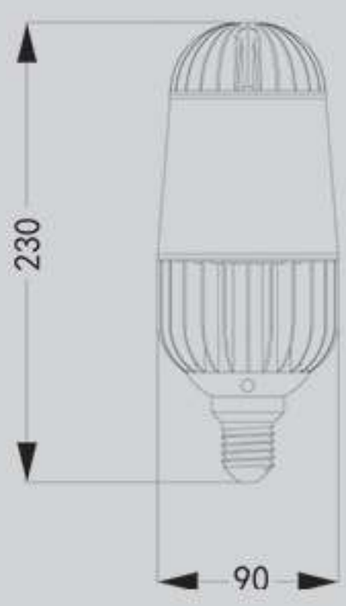

LEITER





# JAZZ-A









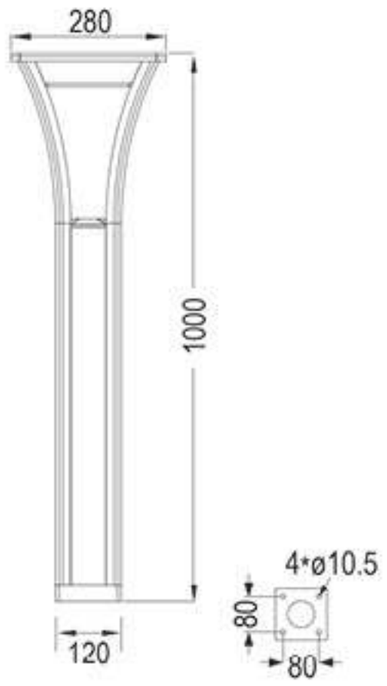
## Product Parameters

| PRODUCT NAME | JAZZ-A |
|---|---|
| Product Size (mm) | 280 X H1000 |
| Power | 2W / 5W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 10W |
| Lithium Battery | 10AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |

## Product Rendering




# CALLY









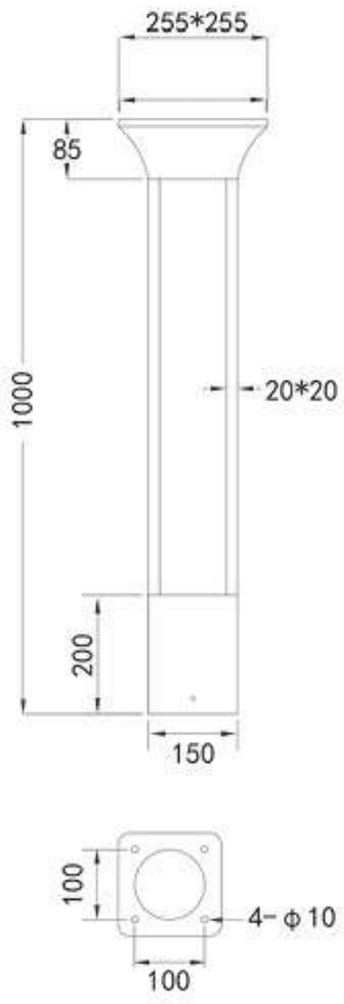


## Product Parameters

| PRODUCT NAME | CALLY |
|---|---|
| Product Size (mm) | 255 X 255 X H1000 |
| Power | 2W / 5W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 5W |
| Lithium Battery | 10AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |
| Net Weight | 5.58 ± 0.5kgs |

## Product Rendering



# ABBY






## Product Parameters


| PRODUCT NAME | ABBY |
|---|---|
| Product Size (mm) | φ250 X H900 |
| Power | 1-3W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 5W |
| Lithium Battery | 5AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |


## Product Rendering



# BECCA



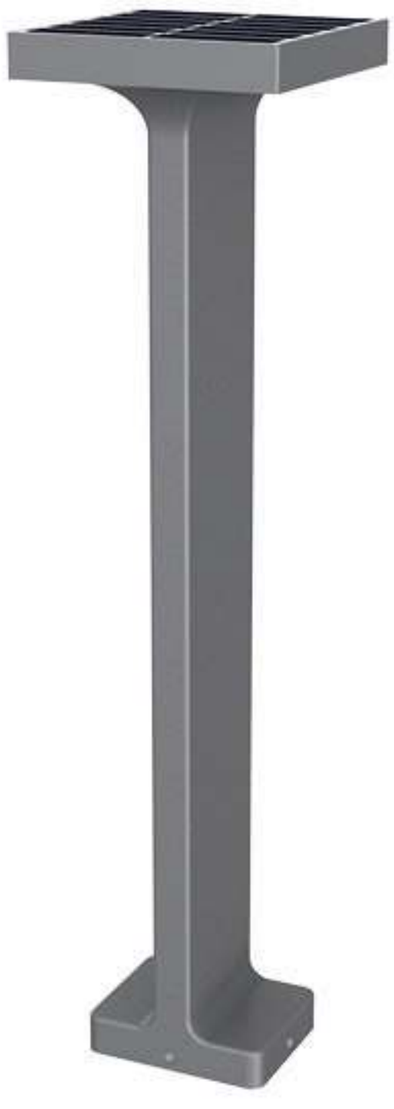

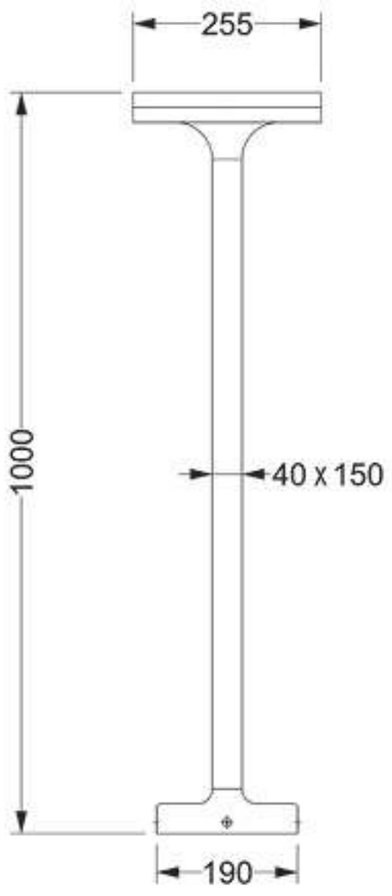


## Product Parameters


| PRODUCT NAME | BECCA |
|---|---|
| Product Size (mm) | 255 X 255 X H1000 |
| Power | 2-5W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 10W |
| Lithium Battery | 10AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |


## Product Rendering



# CALI



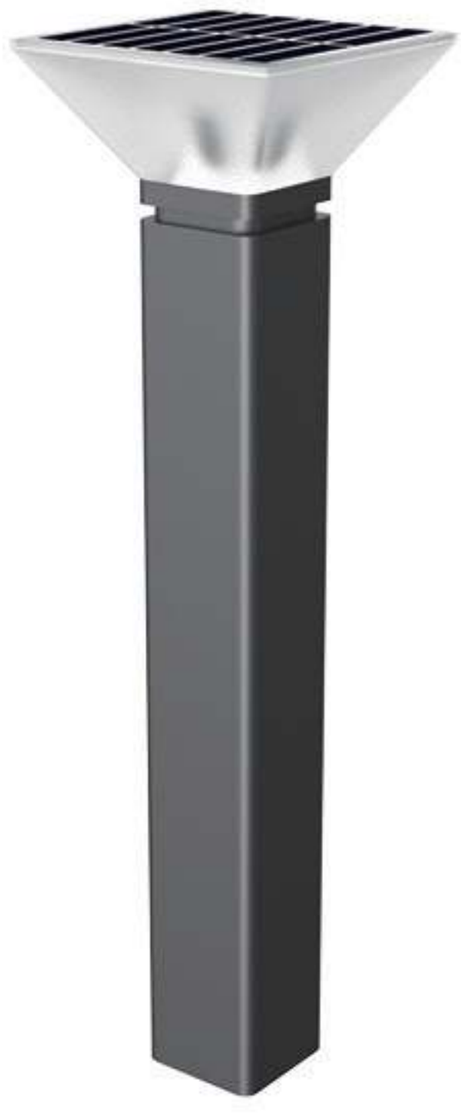

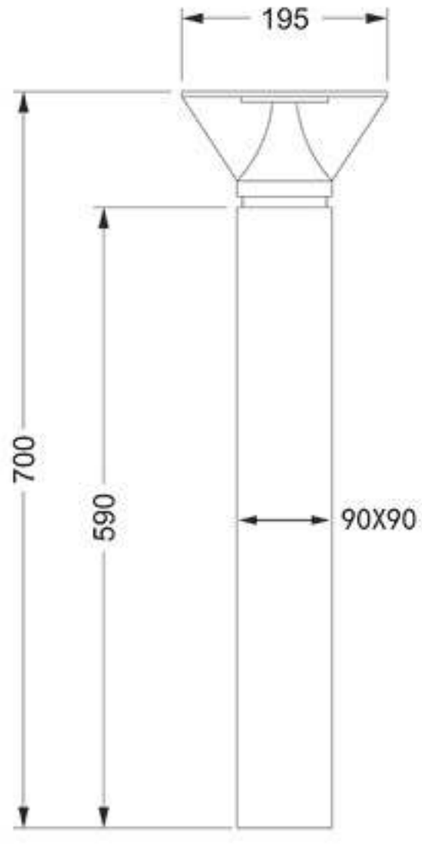


## Product Parameters

| PRODUCT NAME | CALI |
|---|---|
| Product Size (mm) | 195 X 195 X H700 |
| Power | 2-5W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 6W |
| Lithium Battery | 5AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |


## Product Rendering



# ABEILLE





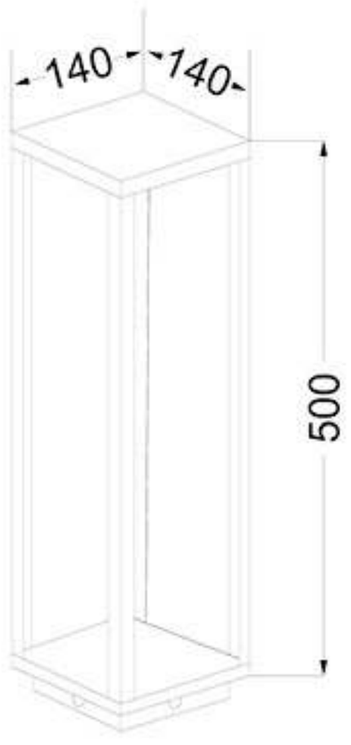


## Product Parameters

| PRODUCT NAME | ABEILLE |
|---|---|
| Product Size (mm) | 140 X 140 X H500 |
| Power | 1-3W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 3W |
| Lithium Battery | 3.5AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Lithium Battery Life | 50000H |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |

## Product Rendering




# GOLD TYCOON–A







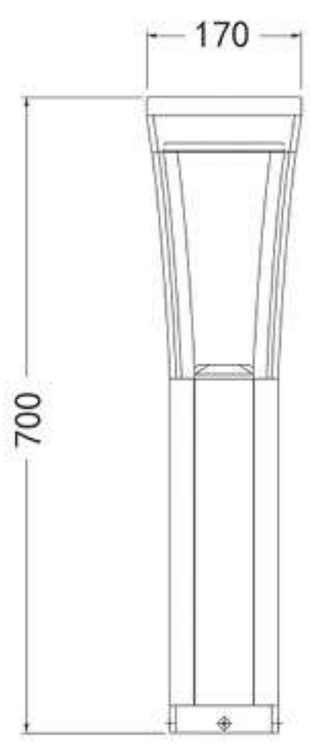


## Product Parameters

| PRODUCT NAME | GOLD TYCOON-A |
|---|---|
| Product Size (mm) | 170 X H700 |
| Power | 1-3W |
| Efficiency | 120-150lm/W |
| Photovoltaic Panel | 5V X 4W |
| Lithium Battery | 3.5AH |
| Lighting Time | 6-10H |
| Rainy Days | 3 Days |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 3 Years |

## Product Rendering




# SQUIRCLE-A










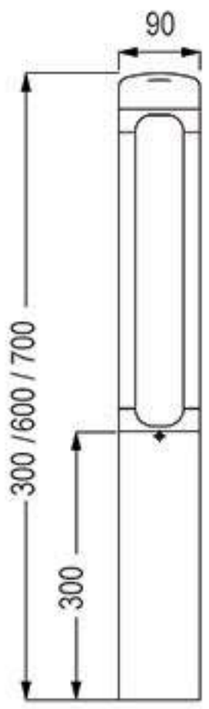

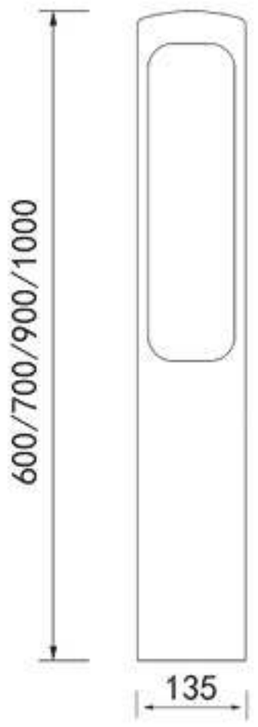
## Product Parameters

| PRODUCT NAME | SQUIRCLE-A | |
|---|---|---|
| Product Size (mm) | A:90 X 90 X H300<br>B:90 X 90 X H600<br>C:90 X 90 X H700 | A:135 X 135 X H600<br>B:135 X 135 X H700<br>C:135 X 135 X H900<br>D:135 X 135 X H1000 |
| Power | 5W / 10W / 15W | |
| Efficiency | 100-135lm/W | |
| Supply Voltage Range | 100-277VAC | |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE | |
| Led Chips | PHILIPS / CREE / OSRAM | |
| LED Lifetime | Min 100,000 hours at 25°C | |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K | |
| Beam Angle | 150° X 360° | |
| CRI | ≥70Ra | |
| SPD | 5KV | |
| Housing Material | Die-cast Aluminum | |
| Lampshade Material | Tempered Glass | |
| Protection Grade | IP65 | |
| Working Temperature | -30°C ~+65°C | |
| Warranty | 5 Years | |

## Product Rendering





# SQUIRCLE-B







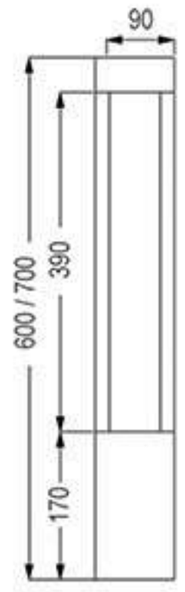

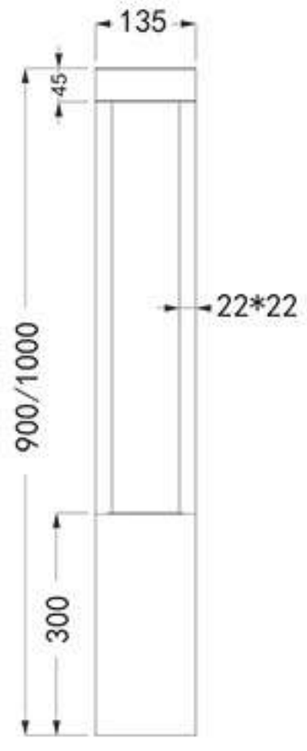
## Product Parameters

| PRODUCT NAME | SQUIRCLE-B |
|---|---|
| Product Size (mm) | A:90 X 90 X H600 A:135 X 135 X H900<br>B:90 X 90 X H700 B:135 X 135 X H1000 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| LED Lifetime | Min 100,000 hours at 25°C |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering




# ROUND-A










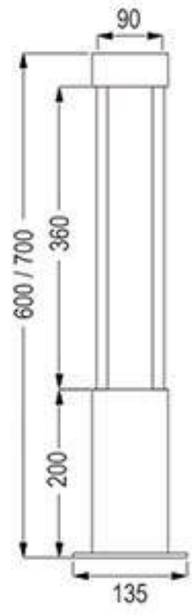

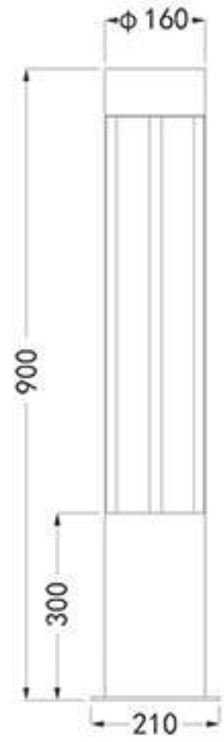
## Product Parameters

| PRODUCT NAME | ROUND-A |
|---|---|
| Product Size (mm) | A:φ90 X H600 A:φ160 X H900<br>B:φ90 X H700 B:φ160 X H1000 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering




# GOLD TYCOON–B







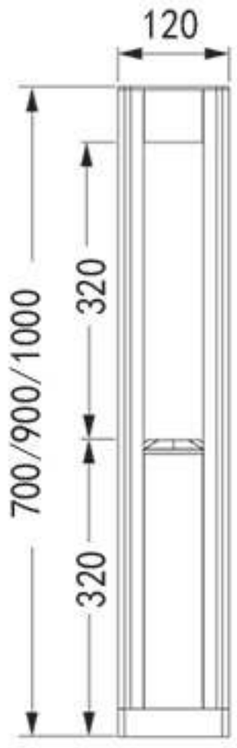


## Product Parameters

| PRODUCT NAME | GOLD TYCOON-B |
|---|---|
| Product Size (mm) | A:120 X 120 X H700<br>B:120 X 120 X H900<br>C:120 X 120 X H1000 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | B: 2.4 ± 0.5kgs |

## Product Rendering




# GOLD TYCOON–A







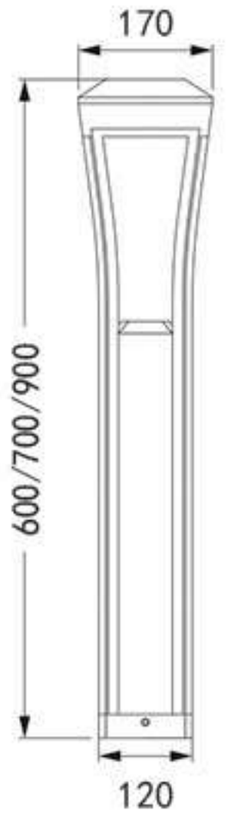


## Product Parameters

| PRODUCT NAME | GOLD TYCOON-A |
|---|---|
| Product Size (mm) | A:170 X 170 X H600<br>B:170 X 170 X H700<br>C:170 X 170 X H900 |
| Power | 10W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering





# GOLDEN TRIANGLE







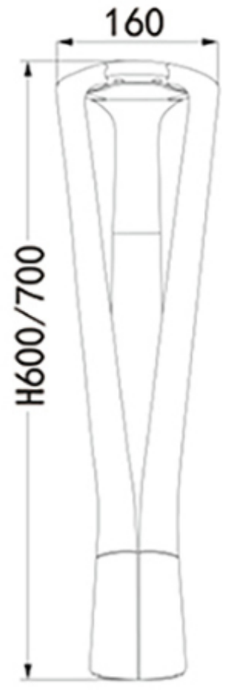

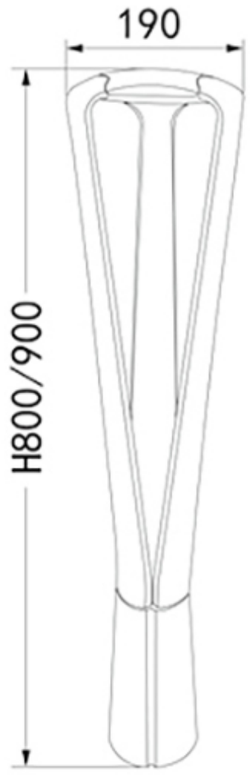
## Product Parameters

| PRODUCT NAME | GOLDEN TRIANGLE |
|---|---|
| Product Size (mm) | A:φ160 X H600 B:φ160 X H700<br>C:φ190 X H800 D:φ190 X H900 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |


## Product Rendering



# FLOURISH





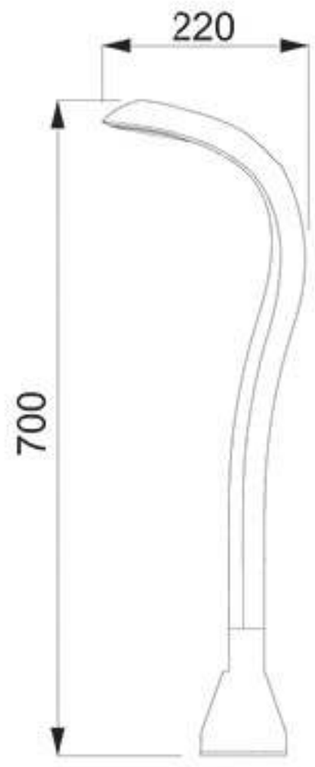


## Product Parameters

| PRODUCT NAME | FLOURISH |
|---|---|
| Product Size (mm) | 220 X H700 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PMMA |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |


## Product Rendering



# FLORID





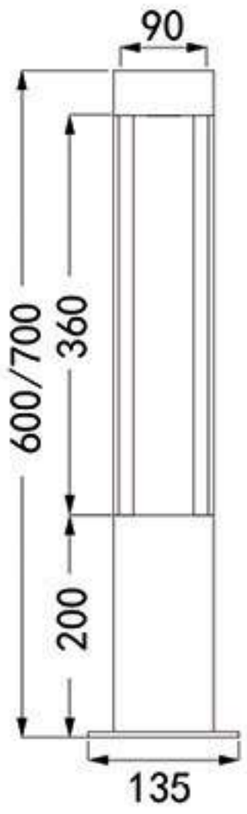



## Product Parameters

| PRODUCT NAME | FLORID |
|---|---|
| Product Size (mm) | A:φ90 X H600<br>B:φ90 X H700 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |


## Product Rendering




# ELLIPSES

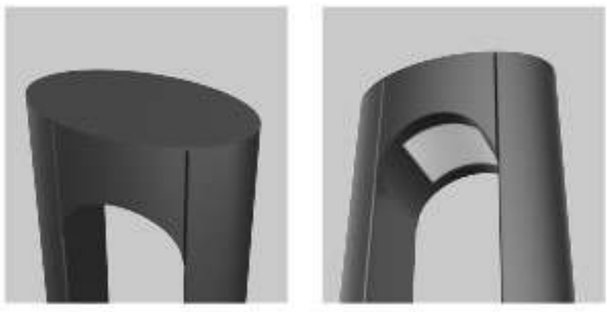



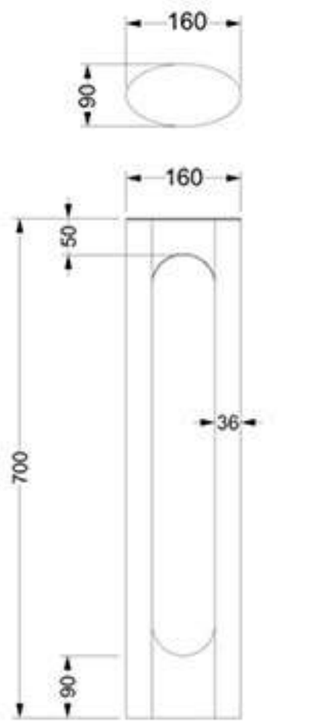


## Product Parameters

| PRODUCT NAME | ELLIPSES |
|---|---|
| Product Size (mm) | 160 X H700 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Module |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |


## Product Rendering



# GOLDEN MUSHROOM





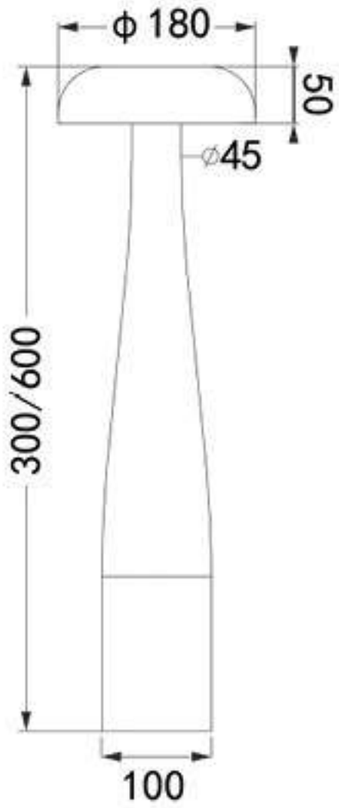


## Product Parameters

| PRODUCT NAME | GOLDEN MUSHROOM |
|---|---|
| Product Size (mm) | φ180 X H600 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | 2.7 ± 0.5kgs |


## Product Rendering



# FAIRY





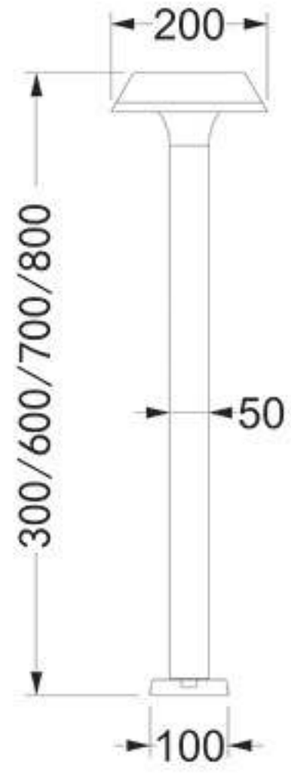


## Product Parameters

| PRODUCT NAME | FAIRY |
|---|---|
| Product Size (mm) | φ200 X H300 / 600 / 700 / 800 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering




# SQUIRCLE-C










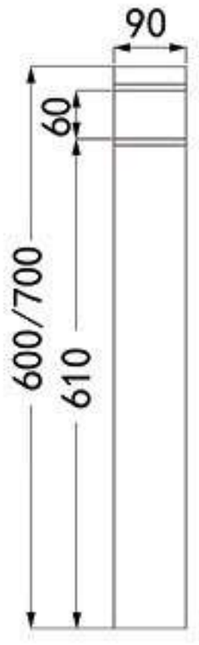

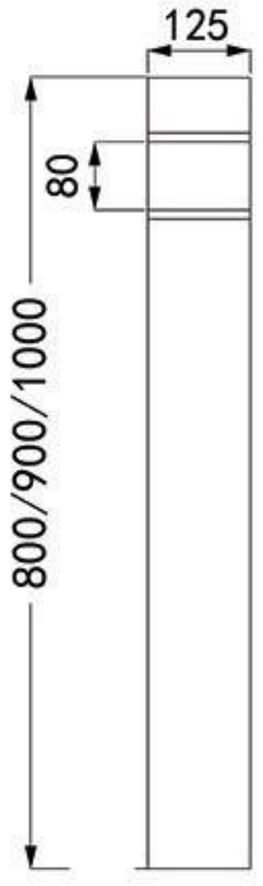
## Product Parameters

| PRODUCT NAME | SQUIRCLE-C |
|---|---|
| Product Size (mm) | A:90 X 90 X H600<br>B:90 X 90 X H700 |
| Power | 5W / 10W / 15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | PC |
| Lampshade Material | Tempered Glass |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering



# ROUND-B











## Product Parameters

| PRODUCT NAME | ROUND-B |
|---|---|
| Product Size (mm) | φ140 X H700 |
| Power | 5W/10W/15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | PC |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | 3.6 ± 0.5kgs |


## Product Rendering




# BLOCK

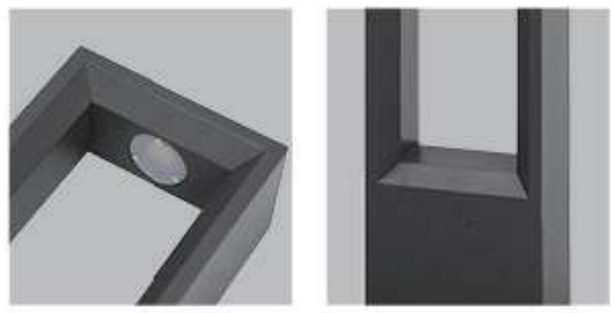



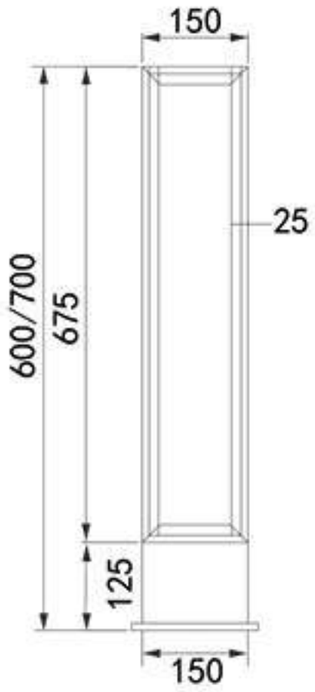


## Product Parameters

| PRODUCT NAME | BLOCK |
|---|---|
| Product Size (mm) | A:150 X 80 X H600<br>B:150 X 80 X H700 |
| Power | 5W / 10W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Module |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |

## Product Rendering




# CAMEAL







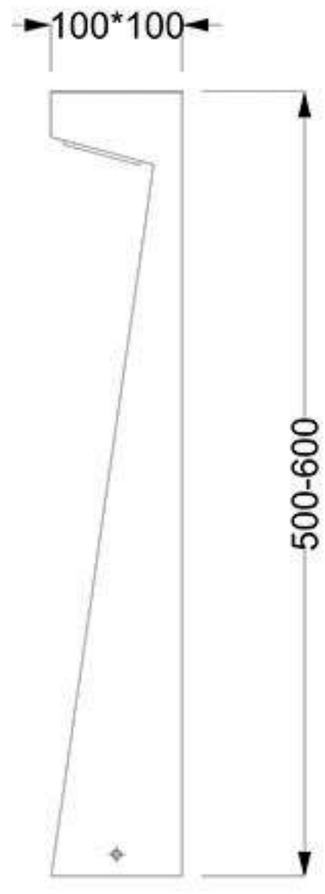




## Product Parameters

| PRODUCT NAME | CAMEAL |
|---|---|
| Product Size (mm) | A:100 X 100 X H500<br>B:100 X 100 X H600 |
| Power | 5W/10W/15W |
| Efficiency | 100-135lm/W |
| Supply Voltage Range | 100-277VAC |
| Driver | MEAN WELL / INVENTRONIC / MOSO / DONE |
| Led Chips | PHILIPS / CREE / OSRAM |
| Colour Temperature | 3000K / 4000K / 5000K / 6000K |
| Beam Angle | 150° X 360° |
| CRI | ≥70Ra |
| SPD | 5KV |
| Housing Material | Die-cast Aluminum |
| Lampshade Material | Module |
| Protection Grade | IP65 |
| Working Temperature | -30°C ~+65°C |
| Warranty | 5 Years |
| Net Weight | 3.6 ± 0.5kgs |

## Product Rendering

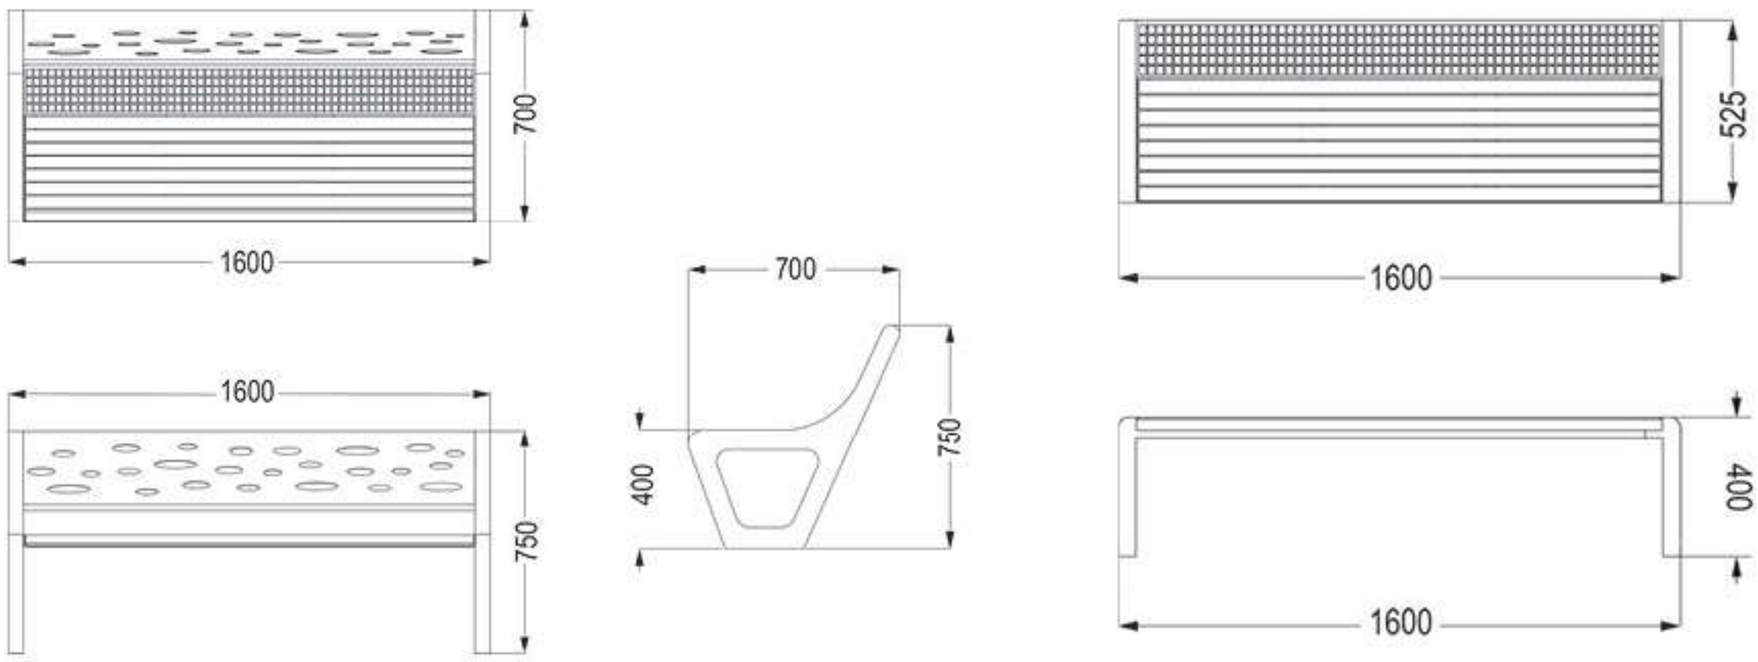


700
1600
1600
525
1600
700
750
400
1600
750
400
400
525

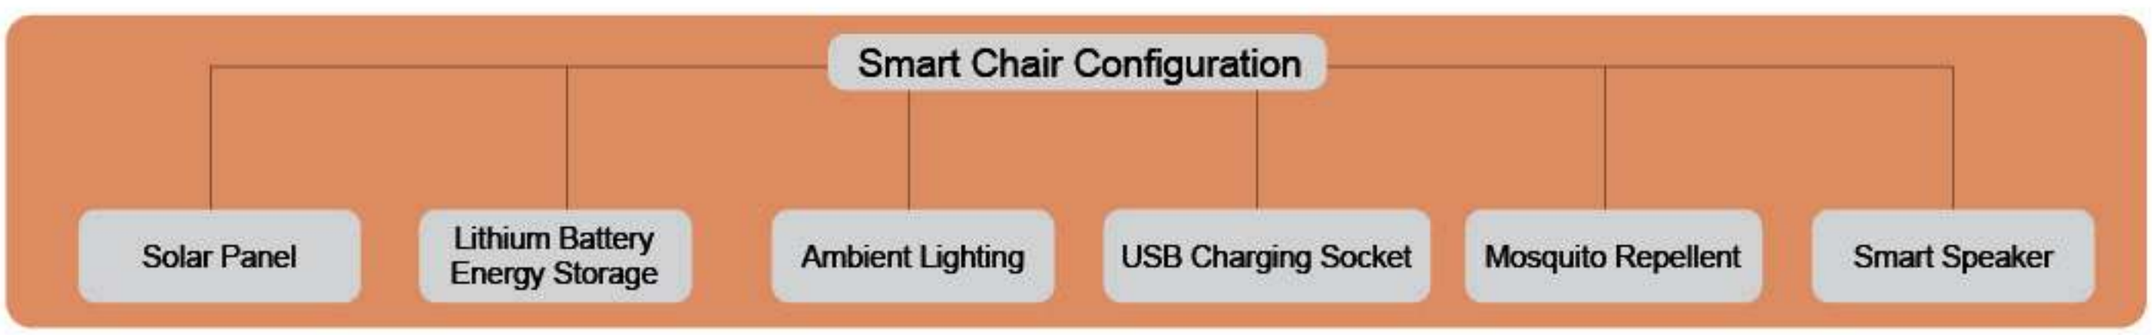

Smart Chair Configuration
Solar Panel
Lithium Battery Energy Storage
Ambient Lighting
USB Charging Socket
Mosquito Repellent
Smart Speaker




BOYA-A



BOYA-B

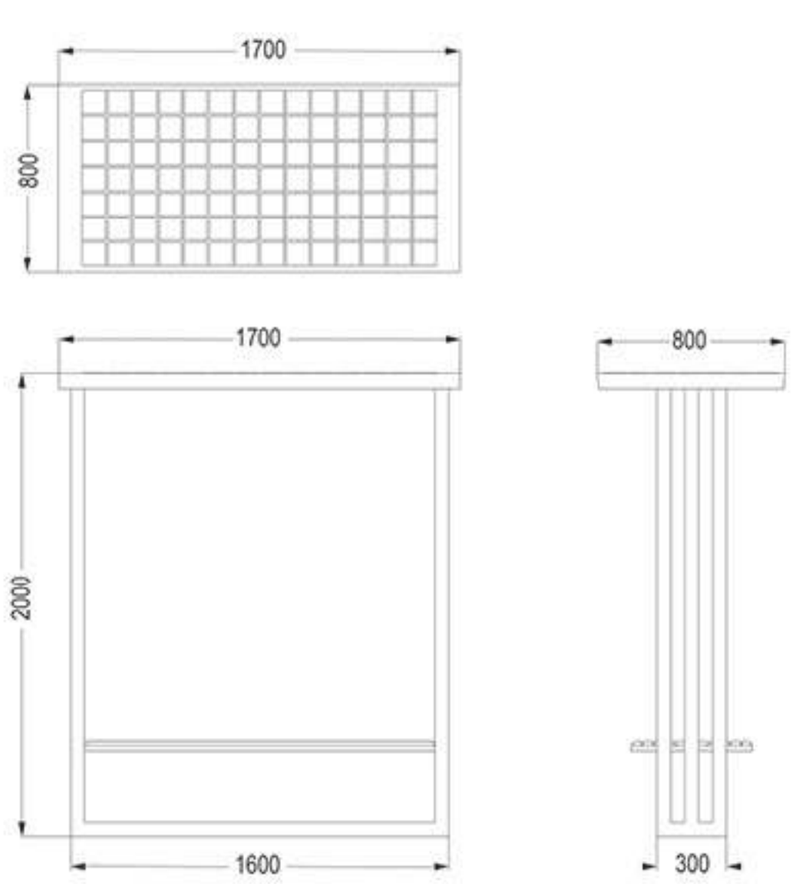

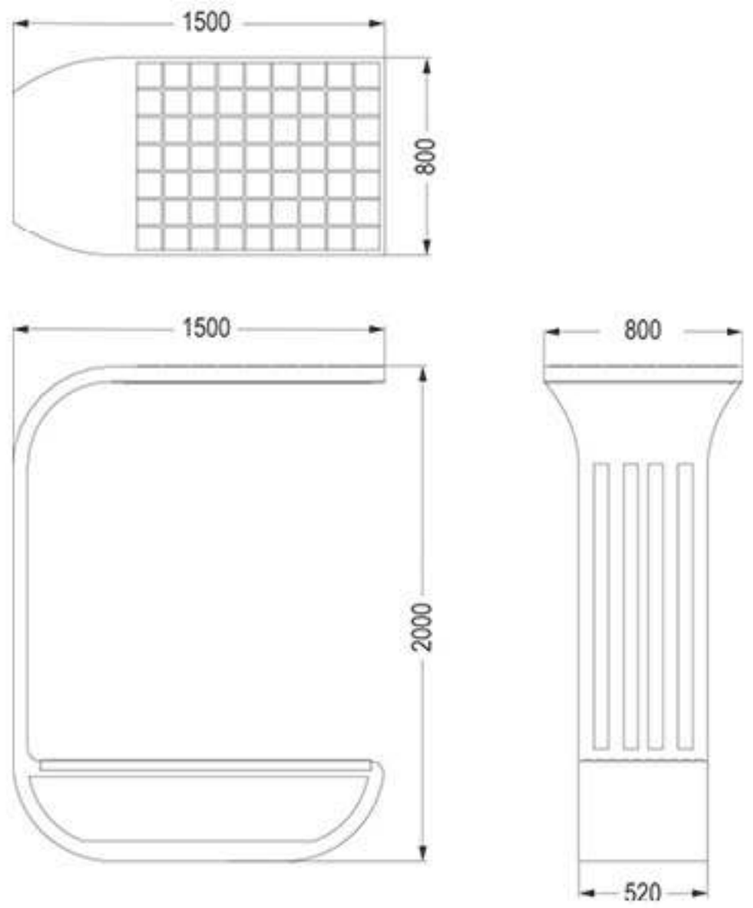
## Smart Chair Configuration

- Solar Panel
- Lithium Battery Energy Storage
- Ambient Lighting
- USB Charging Socket
- Mosquito Repellent
- Smart Speaker



YAGE-B



YAGE-A

Company Cooperation Mode : OEM & ODM & OBM